



INVESTOR IN PEOPLE

Rolls-Royce plc
% M A Gunn
Rolls-Royce plc
Intellectual Property Department
PO Box 31, Moor Lane
DERBY
DE24 8BJ

**The Patent Office
Patents Directorate**

Concept House
Cardiff Road, Newport
South Wales NP10 8QQ

Examiner: 01633 814795
†E-mail: john.donaldson@patent.gov.uk
Switchboard: 01633 814000
Fax: 01633 814444
Minicom: 08459 222250
DX 722540/41 Cleppa Park 3
<http://www.patent.gov.uk>

Your Reference: DY3011
Application No: GB 0217090.0
11 February 2003

Dear Sirs

Patents Act 1977: Search Report under Section 17(5)

I enclose two copies of my search report and a copy of the citation.

Publication

I estimate that, provided you have met all formal requirements, preparations for publication of your application will be completed soon after **16 December 2003**. You will then receive a letter informing you of completion and telling you the publication number and date of publication.

Amendment/withdrawal

If you wish to file amended claims for inclusion with the published application, or to withdraw the application to prevent publication, you must do so before the preparations for publication are completed. **No reminder will be issued.** If you write to the Office less than 3 weeks before the above completion date, please mark your letter prominently: **"URGENT - PUBLICATION IMMINENT"**.

Yours faithfully

John Donaldson
Examiner

†Use of E-mail: Please note that e-mail should be used for correspondence only.



INVESTOR IN PEOPLE

Application No: GB 0217090.0
Claims searched: 1 to 10

Examiner: John Donaldson
Date of search: 10 February 2003

Patents Act 1977 : Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
A	-	WO 01/84466 A1 (TRW), see abstract

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^v:

G4A

Worldwide search of patent documents classified in the following areas of the IPC⁷:

G06F

The following online and other databases have been used in the preparation of this search report:

WPI, EPODOC, JAPIO

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2001 (08.11.2001)

PCT

(10) International Publication Number
WO 01/84466 A1

(51) International Patent Classification⁷: G06G 7/48

(21) International Application Number: PCT/US01/13361

(22) International Filing Date: 25 April 2001 (25.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/200,622 28 April 2000 (28.04.2000) US
09/840,561 23 April 2001 (23.04.2001) US

(71) Applicant: TRW, INC. [US/US]; One Space Park, Redondo Beach, CA 90278 (US).

(72) Inventors: TSAI, Roger, S.: 22499 Kent Avenue, Torrance, CA 90505 (US). CHEN, Yaochung: 6305 Ridgeway Court, Rancho Palos Verdes, CA 90275 (US).

(74) Agents: PANIAGUAS, John, S.: Katten Muchin Zavis, 525 West Monroe Street, Suite 1600, Chicago, IL 60661 et al. (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

*with international search report
before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HYBRID, NON LINEAR, LARGE SIGNAL, MICROWAVE/MILLIMETER WAVE MODEL.

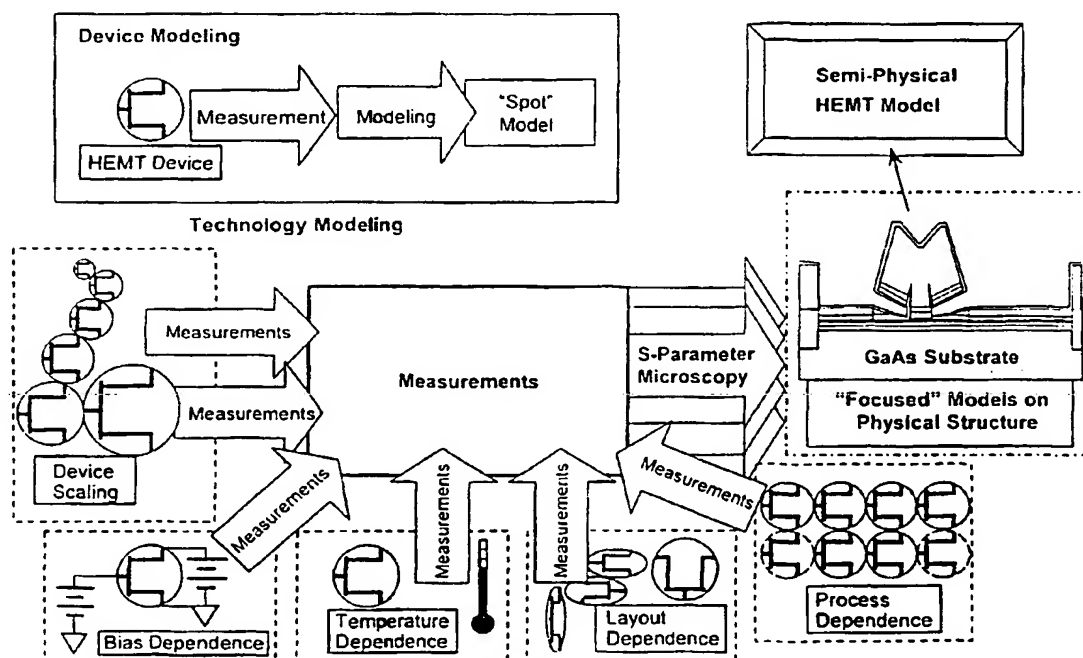

(57) Abstract: A hybrid model formed from a semi-physical device model along with an accurate data-fitting model in order to implement a physical device model as a large signal microwave CAD tool (figure 19). The model incorporates a semi-physical model and measured bias-dependent characteristics.

WO 01/84466 A1

Hybrid, Nonlinear, Large Signal Microwave/Millimeter Wave Model

Cross-Reference to Related Applications

This application is a continuation in part of and claims priority of U.S. Patent Application No. 60/200,622, filed on April 28, 2000.

5 This application is related to the following commonly-owned co-pending patent application, Serial No. 09/680,339, filed on October 5, 2000: METHOD FOR UNIQUE DETERMINATION OF FET EQUIVALENT CIRCUIT MODEL PARAMETERS, by Roger Tsai. This application is also related to the following commonly-owned co-pending patent applications all filed on April 28, 2000, S-PARAMETER MICROSCOPY FOR SEMICONDUCTOR DEVICES, by Roger Tsai, Serial No. 10 60/200,307, (Attorney Docket No. 12-1114); EMBEDDING PARASITIC MODEL FOR PI-FET LAYOUTS, by Roger Tsai, Serial No. 60/200,810, (Attorney Docket No. 12-1116); SEMI-PHYSICAL MODELING OF HEMT DC-TO-HIGH FREQUENCY ELECTROTHERMAL CHARACTERISTICS, by Roger Tsai, Serial No. 60/200,648, (Attorney Docket No. 12-1118); SEMI-PHYSICAL MODELING OF HEMT HIGH 15 FREQUENCY NOISE EQUIVALENT CIRCUIT MODELS, by Roger Tsai, Serial No. 60/200,290, (Attorney Docket No. 12-1119); SEMI-PHYSICAL MODELING OF HEMT HIGH-FREQUENCY SMALL-SIGNAL EQUIVALENT CIRCUIT MODELS, by Roger Tsai, Serial No. 60/200,666, (Attorney Docket No. 12-1120; and PM²: PROCESS PERTURBATION TO MEASURE MODEL METHOD FOR 20 SEMICONDUCTOR DEVICE TECHNOLOGY MODELING, by Roger Tsai, Serial No. 60/200,302, (Attorney Docket No. 12-1128).

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a method for modeling semiconductor devices and more particularly to a method for modeling semiconductor devices, such as field effect transistors (FET) and high electron mobility transistors (HEMT) which utilizes a semi-physical device model along with a data fitting model to form a relatively accurate physical device model for the use in large-signal microwave circuit computer aided design (CAD) tools.

2. Description of the Prior Art

HEMT technology provides unparalleled, high-performance characteristics at high frequencies (microwave to millimeter wave). As such, HEMTs are used in various RF applications. In order to accurately forecast the performance of such devices it is necessary accurately model the effect of the components physical structure on its high frequency, nonlinear and large signal characteristics. Thus, it is necessary to know how physical changes to the device will effect device performance in order to determine what process changes may be acceptable to improve RF yield product and which may be unacceptable which decrease RF product yield.

Large signal microwave circuit computer aided design (CAD) is used to predict the performance of a modeled circuit at high microwave input power levels. The bulk of large signal microwave circuit CAD is based upon a harmonic balance method, which is a frequency domain analysis. This method demands that elements within the circuit satisfy self-consistent conditions, such as charge conservation for all steps within the method's algorithm.

Currently, there are two predominant methods for modeling large signal characteristics of HEMT devices: table-based device modeling; and data-fitting non-linear device modeling.

Table-based device modeling utilizes measured, bias-dependent small signal characteristics for a device along with software-based algorithms to represent a full large signal model for the device. Because the measured data usually spans almost the entire range of the possible device biases, a large table of data must be created. As such, this method is known as a table based or database model. Such table-based models are disclosed in: "A Simplified Broad-Band Large Signal Non-Quasi-Static

Table-Based FET Model,” by M. Fernandez-Barciela, et al., IEEE Trans., Microwave Theory Tech., Vol. 48, No. 3, March 2000. The algorithms that make up this method are designed to produce modeling expressions that satisfy the charge conservative constraint required in a harmonic balance simulation. Thus, table-based method are known to perform well in large signal microwave circuit CAD.

Although the table-based method has proven to be accurate and versatile for large signal microwave circuit CAD, it has several disadvantages. For one, the method requires the use of special, software-based algorithms that are only available through some commercial software packages. Some of these packages include the microwave design system (MDS), advanced-design system (ADS) and ICCAP by Agilent Technologies. Secondly, this method is not based on the device physics and thus does not describe the device’s performance in terms of any of its physical characteristics. Thus, the method is not able to predict device performance based upon physical data. Microwave circuit designers and device technologists have developed empirical data-fitting analytical expressions that can both fit measured DC and small signal characteristics of semiconductor devices and fit measured DC and small signal characteristics of semiconductor devices which satisfy the charge conservation law. Thus, the so-called non-linear data-fitting device models perform robustly in harmonic balance based large signal simulations and are thus ideal for use for large signal microwave circuit CAD. However, because these models are completely empirical, they are not able to relate real, physical characteristics with the predicted device performance. Examples of data-fitting non-linear models for HEMT devices are disclosed in: “A New Empirical Non-Linear Model for HEMT and MESFET Devices,” by I. Angelov, IEEE Trans. Microwave Tech., Vol. 40, No. 12, December 1992. Thus, there is a need to provide a large signal microwave circuit CAD model that is able to relate physical device characteristics to its predicted performance.

SUMMARY OF THE INVENTION

Briefly, the present invention relates to a hybrid modeling method that forms models from a semi-physical device model along with an accurate data-fitting model in order to implement a relatively accurate physical device model as a model that is usable in large signal microwave circuit computer-aided design (CAD) tool. The semi-physical device model enables accurate representation of known physical device

characteristics and measured bias-dependent characteristics. This model is used to accurately simulate the effect of process variation and environmental changes on bias-dependent characteristics. The data-fitting model is used to model these characteristics with relatively good fidelity. The expressions of the data-fitting model are constructed to be charge conservative. As such, the resultant model is physically representative of the device is computationally robust within the harmonic balance algorithms employed by known large signal microwave circuit CAD tools.

DESCRIPTION OF THE DRAWINGS

These and other advantages of the present invention will be readily understood with reference to the following specification and attached drawings wherein:

FIG. 1 is schematic diagram of an exemplary small signal equivalent circuit model for a HEMT device.

FIG. 2 is a sectional view of an exemplary HEMT illustrating the rough translation of the physical origins for each of the equivalent circuit elements illustrated in the small signal circuit model in FIG. 1.

FIG. 3 is a cross-sectional view of a HEMT illustrating the regions in the HEMT which correspond to the various circuit elements in the small signal equivalent circuit model illustrated in FIG. 1.

FIG. 4 is an example of a cross-sectional descriptive input of a physical HEMT device structure by a conventional physical device simulation tool.

FIG. 5 is an example of an epi stack descriptive input of a physical HEMT device structure for a known physical device simulation tool.

FIG. 6 is an example illustrating the location of the epi stack within the device structures cross-sectional view.

FIG. 7 is an example of a relatively accurate measured-to-model I-V characteristics using the semi-physical modeling method in accordance with the present invention.

FIG. 8 is a elevational view illustrating an epi stack for an exemplary HEMT.

FIG. 9 is a cross-sectional view of a HEMT for the exemplary epi stack illustrated in FIG. 8.

FIG. 10 is a blown up diagram of the cross-sectional parameters pertaining to the T-gate geometry for the exemplary epi stack illustrated in FIG. 8.

FIG. 11 is a diagram of an electric conductance model used in the semi-physical example.

FIG. 12 is a Smith chart illustrating the measured vs modeled S-parameters S11, S12 and S22 simulated in accordance with the method in accordance with the present invention.

FIG. 13 is similar to FIG. 12 and illustrates the measured vs. modeled values for the S21 parameter.

FIG. 14 is similar to FIG. 12 but for the S12 S-parameter.

FIG. 15 is a graphical illustration illustrating the fitting of non-linear data-fitting model to a semi-physically modeled I-V characteristics in accordance with the present invention.

FIG. 16 is a graphical illustration illustrating an example of the measured-to-model I-V characteristics of a semi-physical modeling method.

FIG. 17 is an implementation of the nonlinear data-fitting model as a user defined model in LIRBA 6.1.

FIGS. 18A and 18B illustrate the measured vs. modeled input power as a function of output power for a 22-23 GHz high-power amplifier.

FIG. 19 is a block diagram illustrating the semiconductor semi-physical modeling in accordance with the present invention.

FIG. 20 is a block diagram of the semi-physical model used in the processed perturbation to measured model method for modeling semiconductors which utilizes S-parameter microscopy in accordance with the present invention.

FIG. 21A is a schematic cross-sectional diagram of a standard HEMT used in the PM² experiment.

FIG. 21B is a cross-sectional diagram illustrating the epistack for the exemplary HEMT device used to demonstrate the model.

FIG. 22 is schematic diagram illustrating the correspondence of the small signal equivalent circuit components to the detail of the device physical structure.

FIG. 23 is a schematic diagram of the source access conductance of the HEMT.

FIG. 24A is a graphical illustration of a source resistance R_s as a function of the biasing voltage V_{gs} for different drain-to-source voltages V_{ds} .

FIG. 24B is a graphical illustration of the source resistance R_s as a function of the gate-to-source voltage illustrating the measured vs. semi-physically modeled approaches.

FIG. 25 represents an exemplary S-parameter microscope in accordance with the present invention.

FIG. 26 illustrates the internal and external regions of an exemplary HEMT device.

FIG. 27 is similar to FIG. 25 but illustrates the approximate locations of the model elements in the HEMT FET device illustrated in FIG. 25.

FIG. 28 is a schematic diagram of a common source FET equivalent circuit model.

FIG. 29 is an illustration of specific application of the S-parameter microscope illustrated in FIG. 25.

FIG. 30 is similar to FIG. 25 which demonstrates the inability of known systems to accurately predict the internal charge and electrical field structure of a semiconductor device.

FIG. 31 is a plan view of a four-fingered, 200 μ m GaAs HEMT device.

FIG. 32 is a graphical illustration illustrating the measured drain-to-source current I_{ds} as a function of drain-to-source voltage V_{ds} for the sample FET device illustrated in FIG. 31.

FIG. 33 is a graphical illustration illustrating the drain-to-source current I_{ds} and transconductance G_m as a function of the gate-to-source voltage V_{gs} of the sample FET device illustrated in FIG. 31.

FIG. 34 is a Smith chart illustrating the measured S11, S12 and S22 parameters from frequencies of 0.05 to 40.0 GHz for the FET device illustrated in FIG. 31.

FIG. 35 is a graphical illustration of the magnitude as a function of angle for the S21 S-parameter for frequencies of 0.05 to 40 GHz for the exemplary FET illustrated in FIG. 31.

FIG. 36 is a graphical illustration of a charge control map of the charge and electric field distribution in the on mesa source access region shown with R_s as a function bias in accordance with the present invention.

FIG. 37 is a graphical illustration of a charge control map of charge and electric field distribution in the on-mesa drain access region shown with R_d as a function of bias in accordance with the present invention.

5 FIG. 38 is a graphical illustration of a charge control map for the non-quasi static majority carrier transport, shown with R_i as a function of bias in accordance with the present invention.

FIG. 39 is a graphical illustration of a charge control map for gate modulated charge and distribution under the gate, shown with C_{gs} and C_{gt} as function of bias in accordance with the present invention.

10 FIG. 40 is a plan view of an exemplary π -FET with two gate fingers.

FIG. 41 is a plan view of a π -FET with four gate fingers.

FIG. 42 is an illustration of a π -FET parasitic model in accordance with the present invention.

15 FIG. 43 is an illustration of an off-mesa parasitic model for a π -FET in accordance with the present invention.

FIG. 44 is an illustration of an interconnect and boundary parasitic model in accordance with the present invention for the π -FET with four gate fingers as illustrated in FIG. 41.

20 FIG. 45 is an illustration of an inter-electrode parasitic model in accordance with the present invention.

FIG. 46 is a schematic diagram of the inter-electrode parasitic model illustrated in FIG. 45.

FIG. 47 is an illustration of an on-mesa parasitic model in accordance with the present invention.

25 FIG. 48 is a schematic diagram of the on-mesa parasitic model illustrated in FIG. 47.

FIG. 49 is an illustration of an intrinsic model in accordance with the present invention.

FIG. 50 is a schematic diagram of the intrinsic model illustrated in FIG. 49.

30 FIG. 51A is an exemplary device layout of a π -FET with four gate fingers.

FIG. 51B is an equivalent circuit model for the π -FET illustrated in FIG. 37A.

FIG. 52 is a single finger unit device cell intrinsic model in accordance with the present invention.

FIG. 53 is similar to FIG. 52 and illustrates the first level of embedding in accordance with the present invention.

FIG. 54 is similar to FIG. 52 and illustrates the second level of embedding in accordance with the present invention.

5 FIG. 55 is an equivalent circuit model of the π -FET illustrated in FIG. 51A in accordance with the present invention.

FIG. 56 is similar to FIG. 54 and illustrates the third level of embedding in accordance with the present invention.

10 FIG. 57 is similar to FIG. 54 and illustrates the fourth level of embedding in accordance with the present invention.

FIG. 58 is similar to FIG. 54 and illustrates the fifth level of embedding in accordance with the present invention.

FIG. 59A and 59B is a flow chart of a parameter extraction modeling algorithm that forms a part of the present invention.

15 FIG. 60 and 61 illustrate the evaluation of a global error metric involving filtering error and trial model solution convergence speed.

FIG. 62A is a Smith chart illustrating the measured versus the initial model solutions for the S11, S12 and S22 S-parameters from frequencies from 0.05 to 40.0 GHz.

20 FIG. 62B is a graphical illustration of angle versus magnitude for the initially modeled S-parameter S21 from frequencies of 0.05 to 40GHz.

FIG. 63A is a Smith chart illustrating the measured versus simulated S-parameters S11, S12 and S22 for frequencies 0.05 to 40 GHz for the first extraction optimization cycle.

25 FIG. 63B is a graphical illustration of magnitude as a function of angle for the measure and first optimized model S-21 parameter for frequencies 0.05 to 40 GHz for the first optimization cycle.

30 FIG. 64A is a Smith chart illustrating the measure as a function of the final model solution for S-parameters S11, S12 and S22 for frequencies 0.05 to 40 GHz for the final solution.

FIG. 64B is a graphical illustrations of the magnitude as a function of an angle for S-parameter S21 for the final model solution from frequency 0.05 to 40 Ghz.

FIG. 65 is a graphical illustration of the semi-physically modeled vs measured small signal G_m .

FIG. 66 is a graphical illustration of the semi-physically simulated bias dependence of the small-signal output conductance R_{ds} .

5 FIG. 67 is a graphical illustration of the semi-physically simulated bias dependence of the small signal gate-source and gate-drain capacitance C_{gs} and C_{gd} .

FIG. 68 is a graphical illustration of the semi-physically simulated bias-dependence of the small signal gate source charging resistance R_i .

10 FIG. 69 is a graphical illustration of the semi-physically bias dependence of the small signal source and drain resistance R_s and R_d .

FIG. 70 is a graphical illustration of the measured vs modeled bias dependence gain at 23.5 GHz for a K-band MMIC amplifier.

FIG. 71A and 71B are graphical illustrations of the extracted parameters from measured device I-V's for process control monitor testing.

15 FIG. 72 is a graphical illustration of the measured vs semi-physically simulated process variation for G_{mpk} and V_{gspk} .

FIG. 73 is a graphical illustration of the measured vs semi-physically simulated process variation for I_{dpk} and G_{mpk} .

20 FIG. 74 is a graphical illustration of the measured vs semi-physically simulated process variation for I_{max} and V_{po} .

FIG. 75 is a graphical illustration of the measured/extracted vs semi-physically simulated process variation for the small signal equivalent model R_{ds} and G_m .

FIG. 76 is a graphical illustration of the measured/extracted vs semi-physically simulated process variation for the small signal equivalent model C_{gs} and G_m .

25 FIG. 77 is a graphical illustration of the measured vs semi-physically simulated physical dependence for I_{max} as a function of physical gate length.

FIG. 78 is a graphical illustration of the measured/extracted model vs semi-physically simulated physical dependence for R_{ds} as a function of physical recess undercut width.

30

DETAILED DESCRIPTION

The present invention relates to a hybrid model based upon using a semi-physical model in conjunction with a data-fitting nonlinear model for use in large signal

microwave circuit computer aided design (CAD). The goal of the combined or hybrid modeling approach is to combine the physical modeling capability of the semi-physical approach along with the ability to be used in harmonic balance-based circuit simulation. The basic approach is set forth below:

- 5 1. Derive a semi-physical device model that is able to replicate measured DC I-V and bias-dependence small signal characteristics very accurately.
2. Select a data-fitting nonlinear device model whose expressions satisfy the charge conservation law.
3. Use a semi-physical device model to generate the necessary I-V
10 (current/voltage) in C-V (capacitance/voltage) data for the data-fitting nonlinear device model.
4. Derive model parameters for the data-fitting model such that it fits the semi-physically modeled characteristics.
5. Implement the data-fitting device model in a large signal microwave circuit
15 CAD tool.

Steps 3-5 may be repeated for arbitrary physical changes to the semi-physical device. The semi-physical device model is able to reflect the effect of these changes in terms of the I-V and C-V performance. Consequently, through the use of data-fitting model, this change in performance can be simulated in a large signal regime.

20 As mentioned above, Step 1 of the procedure is to derive a semi-physical device model for the HEMT device. The semi-physical device model is discussed below in connection through FIGS. 1-14. The hybrid model is discussed in connection with FIGS. 15-18.

25 **SEMI-PHYSICAL DETERMINATION OF SMALL-SIGNAL EQUIVALENT CIRCUITS**

30 The semi-physical model provides model elements for the standard small signal equivalent circuit model or FET as illustrated in FIG. 1. However, unlike conventional methods, the model elements are derived from small signal excitation analysis of the intrinsic charge and electric fields within the device. As such, the simulated small signal model elements represent a relatively accurate physical equivalent circuit description of a physical FET.

The general methodology for the semi-physical modeling of intrinsic charge, electrical conductance and electric field is as set forth below: First, the relationships between the conduction band offsets, electric permittivity and material composition for the various materials in the epi stack are determined. These relationships can be performed analytically or by fitting simulated data from physical simulators. Subsequently, the basic electron transport characteristics in any of the applicable bulk materials in the epi stack are determined. Once the electron transport characteristics are determined, the undepleted linear channel mobility is determined either through material characterization or physical simulation. Subsequently, the Schottky barrier height value or expressions are determined. Once the Schottky barrier height value is determined, the semi-physical equations are constructed modeling the following characteristics:

Fundamental-charge control physics for sheet charge in the active channel as controlled by the gate terminal voltage.

Average centroid position of the sheet charge within the active channel width.

Position of charge partitioning boundaries as a function of gate, drain and source terminal voltages.

Bias dependence of linear channel mobility in the surface depleted regions.

Bias dependent of the velocity saturating electric field.

Saturated electron velocity.

Electrical conductance of the linear conductance region of the channel under the gate.

Electrical conductance within the source and drain access regions

Once the semi-physical equations are determined, the empirical terms of the semi-physical modeling equations are adjusted to fit the model I-V (current/voltage) characteristics against measured values. Subsequently, the empirical terms are iteratively adjusted to achieve a simultaneous fit of measured C-V (capacitance-voltage) and I-V characteristics. Lastly, the empirical modeling terms are fixed for future use.

By constructing a comprehensive set of semi-physical equations that cover all of the physical phenomenon as mentioned above, the physical operating mechanisms within a HEMT device can be relatively accurately determined. FIG. 7 illustrates a set of relatively accurate measured-to-modeled I-V characteristics for a HEMT using the semi-physical modeling discussed herein. In particular, FIG. 7 illustrates the drain-to-

source current I_{ds} as a function of the drain-to-source voltage V_{ds} for various gate biases, for example, from 0.4V to -1.0V. As shown in FIG. 7, solid lines are used to represent the semi-physical model while the Xs are used to represent measured values. As shown in FIG. 7, a close relationship exists between the measured values and the modeled parameters.

An example of semi-physical modeling for physical device operation in accordance with the present invention is provided below. The example utilizes an exemplary device as illustrated in FIGS. 8 and 9. Table 2 represents exemplary values for the physical cross-section dimension parameters of the device. FIG. 10 relates to a blown up T-gate characteristic which is correlated to the parameters identified in Table 1.

Table 1
Values for the Physical Parameters Input into Device Cross Section

<u>Layout Parameter</u>	<u>Units</u>	<u>Value</u>
Gate Length Lg	[μm]	0.150
Wing Length Lgw	[μm]	0.520
Gate Mushroom Crown Length Lgmcl	[μm]	0.200
Total Gate Height Hg	[μm]	0.650
Gate Stem Height Hgstern	[μm]	0.300
Gate Sag Height Hgsag	[μm]	0.100
Gate Cross-Sectional Area GateArea	[μm^2]	0.187
Max Cross-Sectional Area MaxArea	[μm^2]	0.364
Total Gate Periph Wg	[μm]	200.000
# Fingers N	[]	4.000
Source-Drain Spacing Dsd	[μm]	1.800
Gate-Source Spacing Dsg	[μm]	0.700
Gate-Drain Spacing Dgd	[μm]	1.100
Gate-Source Recess RECsg	[μm]	0.160
Gate-Drain Recess RECgd	[μm]	0.240
Recess Etch Depth Hrec	[A]	780.000
SiN Thickness Hsin	[A]	750.000
Gatefeed-Mesa Spacing Dgfm	[μm]	2.000
Gateend-Mesa Overlap Dgem	[μm]	2.000
Finger-Finger Spacing Thru Drain Dffd	[μm]	16.500
Finger-Finger Spacing Thru Source Dffs	[μm]	13.500
Source Airbridge Inset? AB?	[]	P
Source Airbridge Inset Dsabin	[μm]	28.000
Source Airbridge Height Hsab	[μm]	3.500
Source-Gate Airbridge Clearance Hgsab	[μm]	1.640
Source Pad Width Ws	[μm]	12.000
Drain Pad Width Wd	[μm]	14.000
Substrate Thickness Hsub	[μm]	100.000

As mentioned above, the semi-physical modeling of the intrinsic charge and electric field within the HEMT device is initiated by determining the relationships between the conduction band offset, electric permittivity, and material composition for the various materials in the epi stack. Material composition related band offset and electrical permittivity relationships may be obtained from various references, such as "Physics of Semiconductor Devices," by Michael Shur, Prentice Hall, Englewood Cliffs, New Jersey 1990. The basic electron transport characteristics, for example, for the linear mobility of electron-carriers in the bulk GaAs cap-layer may be determined to be $1350\text{cm}^2/\text{Vs}$, available from "Physics of Semiconductor Devices", supra. The linear mobility of electron carriers in the undepleted channels is assumed to be $5500\text{cm}^2/\text{Vs}$. This value may be measured by Hall effect samples which have epi stacks grown identically to the stack in the example, except for some differences in the GaAs cap layer. The Schottky barrier height is assumed to be 1.051 volts, which is typical of platinum metal on a AlGaAs material.

HEMT device. These expressions govern how to partition the model charge between the influence of different terminals.

Effective Gate Length	L_{gef}	$[\mu\text{m}]$	$= L_g + \Delta L_s + \Delta L_d$
Gate-Source Control Region	L_{gs}	$[\mu\text{m}]$	$= L_g/2 + \Delta L_s + X_{\text{D1}}$
Source-Side Effective Gate Length Extension	ΔL_s	$[\mu\text{m}]$	$= \Delta L_{s0} + \Delta L_K \cdot V_{\text{gse}}$
Drain-Side Effective Gate Length Extension	ΔL_d	$[\mu\text{m}]$	$= \Delta L_{d0} + \Delta L_K \cdot V_{\text{gse}} + \Delta L_L \cdot V_{\text{dsat}}$
Gate-Drain Control Region	L_{gd}	$[\mu\text{m}]$	$= (L_g/2 + \Delta L_d) \cdot \{ \tanh[10(L_g/2 - X_{\text{D1}})] + 1 \} / 2$
Bias Dependent Extension of the Saturated Transport Region	X_{D1}	$[\mu\text{m}]$	$= X_{\text{DL}} V_{\text{ds}} M_{\text{KdL}} / \{ M_{\text{KdK}} V_{\text{gse}} (1 + (X_{\text{DL}} V_{\text{ds}} M_{\text{KdL}} / (M_{\text{KdK}} V_{\text{gse}} (L_g/2 + \text{REC}_{\text{gd}})))^m \}^{1/m}$
Empirical Drain-Saturated Transport Boundary Factor	X_{DL}	$[\mu\text{m}]$	$= L_g V_{\text{ds}} / \{ 2 \{ 1 + (V_{\text{ds}}/V_{\text{satn}})^m \}^{1/m} \}$ $= X_{\text{D0}} \{ M_{\text{Ks}} [1 / (1 + (V_{\text{ds}}/V_{\text{satn}})^m)^{1/m}] - V_{\text{satn}}^m (V_{\text{ds}}/V_{\text{satn}})^{m-1} \} / \{ V_{\text{satn}}^m [1 + (V_{\text{ds}}/V_{\text{satn}})^m]^{1/m+1} \}$
Position of the Boundary between Regions 1 and 2	X_{S}	$[\mu\text{m}]$	$V_{\text{ds}} M_{\text{KsL}} + V_{\text{gse}} M_{\text{KsK}} \}$
Note: Region 1 denotes the linear region, while Region 2 denotes the saturated region of the channel			
Empirical Effective Gate Length Extension Gate Bias Factor	ΔL_K	$[\mu\text{m}/\text{V}]$	
Empirical Effective Gate Length Extension Drain Bias Factor	ΔL_L	$[\mu\text{m}/\text{V}]$	
Effective Drain-Source Voltage Control-2	V_{dsat2}	$[\text{V}]$	$= V_{\text{ds}} / \{ 1 + (V_{\text{ds}}/V_{\text{satn}})^m \}^{1/m}$
Rough, Intrinsic Saturation Voltage	V_{satn}	$[\text{V}]$	$= V_{\text{sat}} / \theta_{\text{chL}}$ $= g_{\text{chL}} V_{\text{gse}} / (1 + \theta_{\text{chL}} R_s + \text{sqn}(1 + 2g_{\text{chL}} R_s + (V_{\text{gse}}/V_L)^2))$
Rough, Intrinsic Saturation Current Level	I_{sat}	$[\text{A}]$	$= (q N_s \mu_{\text{eff}} W g) / L_g$
Intrinsic Conductance of the Linear Region, Under the gate	g_{chL}	$[\text{S}]$	$= F_s \cdot L_g$
Rough Intrinsic Saturation Voltage Level	V_L	$[\text{V}]$	
Empirical Knee Shaping Parameter	m	$[\]$	
Empirical Region 2 extension Drain Bias Factor	M_{KdL}	$[\]$	
Empirical Region 2 extension Gate Bias Factor	M_{KdK}	$[\]$	
Fine Intrinsic Saturation Voltage	V_{satn}	$[\text{V}]$	$= 1 - \text{sqn}(g_{\text{chL}} V_{\text{gse}} V_L^2 / (V_L^2 (A + \theta_{\text{chL}} R_s) + V_{\text{gse}}^2 (g_{\text{chL}} R_s V_L^2)))$ $= g_{\text{chL}} V_{\text{gse}} V_L^2 / (V_{\text{gse}}^2 (1 + g_{\text{chL}} R_s (V_L/V_{\text{gse}})^2))$
Fine Intrinsic Saturation Current Level	I_{satcom}	$[\text{A}]$	$= X_{\text{S}} / L_{\text{gef}}$
Saturation Region Length Ratio	A	$[\]$	$= L_g / 2$
Initial Starting position for Region 1 & 2 Boundary	X_{D0}	$[\mu\text{m}]$	
Region 1 & 2 Boundary Bias Factor	M_{Ks}	$[\]$	
Region 1 & 2 Boundary Drain Bias Factor	M_{KsL}	$[\]$	
Region 1 & 2 Boundary Drain Bias Factor	M_{KsK}	$[\]$	

The following equations represent the semi-physical expressions used to model the bias dependence of linear channel mobility in depleted regions.

Depleted Channel Mobility	μ_{ave}	$[\text{cm}^2/\text{V}\cdot\text{s}]$	$= \mu_{\text{dchan}} + \mu_{\text{dK}} V_{\text{gse}}$
Fixed Depleted Channel Mobility	μ_{dchan}	$[\text{cm}^2/\text{V}\cdot\text{s}]$	
Depleted Channel Mobility Gate Bias Factor	μ_{dK}	$[\text{cm}^2/\text{V}^2\cdot\text{s}]$	

The following equations are the semi-physical expressions used to model the bias dependence of the saturating electric field and saturation velocity.

Saturating Electric Field	F_S	$[V/\mu m]$	$= V_S /$ $[(\mu_{sat} + \mu_{satK} V_{gs}) 10000]$
Fixed Saturating Channel Mobility	μ_{sat}	$[cm^2/V \cdot s]$	
Saturating Channel Mobility Gate Bias Factor	μ_{satK}	$[cm^2/V^2 \cdot s]$	
Saturation Velocity	V_S	$[cm/s]$	

FIG. 11 is a schematically illustrates how electrical conductance in the source and drain access regions are modeled in the example.

The following equations describe the semi-physical model for the source access region conductance.

Source Access Resistance	R_S	$[\Omega]$	$= (R_{SundepCap} + R_{SAccess} + R_{SBoundary}) / W_g$
Source Access Resistance: Channel and Cap	$R_{SundepCap}$	$[\Omega \cdot \mu m]$	$= R_{cont} / RF_{conf} +$ $R_{SH} [D_{eq} - (REC_{eq} + L_g / 2)]$ $= R_{SdepRec}^{ON} \cdot MR_s \cdot \tanh(KC_{RL} \cdot$ $V_{gs} - VC_{RL} + V_{ds} \cdot MC_{RL}) + 1 / 2 \cdot \{ V_{gs}$ $/ 2 \cdot [1 - \tanh(KR_{sK} (V_{gs} - VR_{sOn}))] \} \cdot \{ \tanh[$ $KR_{sSat} (V_{ds} - VR_{sKnee}) + 1 \} / 2 + R_{SundepRec} \cdot \{ \tanh[$ $KR_{sK} (V_{gs} - VR_{sOn}) + 1 \} / 2$ $= R_{SdepRec}^{ON} \cdot MR_s \cdot \tanh(KR_{sK} V_{gs} + KR_{sL} V_{ds} +$ $VR_{sOn} + 1) / 2 \cdot \{ (1 + V_{ds} MR_{sL}) \cdot MR_{sK} \cdot [1 -$ $\tanh(KR_{sSat} (V_{ds} - VR_{sKnee}))] \} / \{ 2 \cdot (1 + V_{gs} / (1 +$ $V_{ds} MR_{sL}) \cdot MR_{sK})^{1/2} \}$
Source Access Resistance: Recess and Undepleted Cap	$R_{SAccess}$	$[\Omega \cdot \mu m]$	
Source Access Resistance: Crowding resistance due to conductance mismatch	$R_{SBoundary}$	$[\Omega \cdot \mu m]$	$= R_{SHdep} (REC_{eq})$
Resistance of the Source Recess Access region at high on-state bias (V_{on})	$R_{SdepRec}^{ON}$	$[\Omega \cdot \mu m]$	$= R_{SHundep} (REC_{eq})$
Resistance of the Undepleted Source Recess Access region	$R_{SundepRec}$	$[\Omega \cdot \mu m]$	$= 1 / (q N_{max} \mu_{ave})$
Uncapped, Fully Depleted Sheet Resistance	R_{SHdep}	$[\Omega/sq]$	$= 1 / (1/R_{SHCap} + 1/R_{SHundep})$
Capped, Undepleted Sheet Resistance	R_{SH}	$[\Omega/sq]$	$= F_{surfUndep} / (q N_{max} \mu_{undchan})$
Uncapped, Undepleted Sheet Resistance	$R_{SHundep}$	$[\Omega/sq]$	$= 1 / [q N_{cap} \mu_{cap} (H_{cap} - H_{capEch})]$
Cap Sheet Resistance	R_{SHCap}	$[\Omega/sq]$	
Surface Depletion Factor	$F_{surfUndep}$	$[\]$	
High On-state bias: Diode Turn-on voltage	V_{ON}	$[V]$	$= \Phi_b \cdot \Delta E_C - \Delta E_f$
Ohmic Contact Resistance	R_{cont}	$[\Omega \cdot \mu m]$	
RF Ohmic Contact Resistance Reduction Factor	RF_{conf}	$[\]$	
Source Access Resistance Bias Modification Factor	MR_s	$[\]$	
Cf-Vds Bias Modification Factor	MC_{RL}	$[\]$	
Rs-Vds Bias Modification Factor	MR_{sL}	$[\]$	
Rs-Vgs Bias Modification Factor	MR_{sK}	$[\]$	
Cf-Vgs Swith point to On-state	VC_{RL}	$[\]$	
Cf-Vgs Bias Expansion Factor	KC_{RL}	$[\]$	
Rs-Vgs Swith point to On-state	VR_{sOn}	$[\]$	
Rs-Vgs Swith point to Off-state	VR_{sOff}	$[\]$	
Rs-Vds Swith point from Off-On transition	VR_{sKnee}	$[\]$	
Rs-Vds Bias Expansion Factor	KR_{sL}	$[\]$	
Rs-Vgs Bias Expansion Factor	KR_{sK}	$[\]$	
Rs-Vds Bias Expansion Factor @ Rs Saturation	KR_{sSat}	$[\]$	
Rs Bias Shaping Factor	γ_{Rs}	$[\]$	

The following equations describe the drain access region conductance:

Drain Access Resistance	R_D	[Ω]	$= (R_{DRF} + R_{DN})$
Drain Access Resistance, except for recess access	R_{DRF}	[Ω]	$= (R_{DAccess} + R_{DundepCap} + R_{DundepRec} + R_{DSaturated}) / W_g$
Drain Recess Access Resistance	R_{DN}	[Ω]	$= (R_{DRF}) / W_g$
Drain Access Resistance: Recess and Undepleted Cap	$R_{DAccess}$	[$\Omega \cdot \mu m$]	$= R_{DundepRec}^{ON} (MR_d \cdot V_{gs} + 1) [1 - \tanh(KR_{daccK} \cdot (V_{gs} - V_{RdOn} + V_{ds} \cdot MR_{daccL}))] / 2$
Drain Access Resistance: Channel and Cap	$R_{DundepCap}$	[$\Omega \cdot \mu m$]	$= R_{dacc}/RF_{rcap} + R_{SH} [D_{gd} - (REC_{gd} + L_g/2)]$
Resistance of the Undepleted Drain Recess Access region	$R_{DundepRec}$	[$\Omega \cdot \mu m$]	$= R_{SHundep} (REC_{gd})$
Resistance of the Saturated Drain Recess Access region	$R_{DSaturated}$	[$\Omega \cdot \mu m$]	$= MR_{dSat} \cdot V_{ds} \exp \{ -(V_{gs} + V_{ds} \cdot MR_{dL} + VR_{dSatOn})^2 / (2 VR_{dSatOn}) \} / \{ VR_{dSat} [1 + (V_{ds}/VR_{dSat})^{R_d}]^{(1/R_d + 1/R_d)} \}$
Resistance of the Drain Recess Access region at high on-state bias (V_{on})	$R_{DdepRec}^{ON}$	[$\Omega \cdot \mu m$]	$= R_{SHdep} (REC_{gd})$
	R_{DRec}	[$\Omega \cdot \mu m$]	$= \delta V_L \{ 1 + (R_{DAccess} - R_{DundepCap}) / (2\delta V_L) + \sqrt{1 + \delta^2 + ((R_{DAccess} - R_{DundepCap}) / (2\delta V_L) - 1)^2} \}$
Drain Access Resistance Bias Modification Factor	MR_d	[]	
Rd-Vds Access Bias Modification Factor	MR_{daccL}	[]	
Rd-Vgs Swith point to On-state	VR_{dOn}	[]	
Rd-Vgs Swith point at saturation	VR_{dSat}	[]	
Rdaccess-Vgs Bias Expansion Factor	KR_{daccK}	[]	
Rd-Vds Saturation Bias Modification Factor	MR_{dSat}	[]	
Rd-Vds Access Resistance Bias Modification Factor	MR_{dL}	[]	
Rd-Vgs Saturation Swith point to Off-state	$VR_{dSatOff}$	[]	
Rd-Vgs Saturation Swith point	VR_{dSat}	[]	
Rd-Vgs Saturation Swith point transition width	VR_{dSatL}	[]	
Rd Bias Shaping Factor	γR_d	[]	

SEMI-PHYSICAL DETERMINATION OF SMALL-SIGNAL EQUIVALENT CIRCUITS

To derive values for the familiar small signal equivalent circuit as shown in FIG. 1, a small signal excitation analysis must be applied to the semi-physically modeled physical expressions. The method of applying such an analysis is as follows:

1) Gate Terminal Voltage Excitation

Apply a small +/- voltage delta around the desired bias condition, across the gate-source terminals.

Equivalent circuit element $G_m = \Delta(I_{ds}) / \Delta(V_{gs})$ where $\Delta(V_{gs})$ is mostly the applied voltage deltas, but also subtracting out that voltage which is dropped across the gate source access region, shown as R_{sCont} , $R_{sundepCap}$, $R_{sundepRec}$, $R_{sdepRec}$, and $R_{sBoundary}$ in FIG. 11, above.

Equivalent circuit element C_{gs} and C_{gd} takes the form of $\Delta(N_{sn}) / \Delta(V_{gs}) \cdot L_{gn}$, where $\Delta(N_{sn})$ is the appropriate charge control

expression, and L_{gn} is the gate source or gate drain charge partitioning boundary length.

Equivalent circuit element $R_i = L_{gs} / (C_{gs\text{channel}} * v_s)$ where $C_{gs\text{channel}}$ is the portion of gate source capacitance attributed to the channel only, and v_s is the saturated electron velocity.

2) Drain Terminal Voltage Excitation

Apply a small +/- voltage delta around the same bias condition as in 1, but the delta is applied across drain source terminals.

Equivalent circuit element $R_{ds} = 1 / \{ \Delta(I_{ds}) / \Delta(V_{ds}') \}$ where V_{ds}' is mostly the applied voltage deltas, but also subtracting out voltage which is dropped over both the gate source and gate drain access regions.

Equivalent circuit element C_{ds} is taken to be the sum of the appropriate fringing capacitance Semi-Physical models, or can take the form of $\Delta(N_{sd}) / \Delta(V_{ds}') * X_{sat}$, where N_{sd} is the charge control expression for charge accumulation between the appropriate source and drain charge boundaries, and X_{sat} is the length of the saturated region, if in saturation.

3) On-mesa Parasitic Elements: The equivalent circuit elements, R_s and R_d are expressed by the appropriate electrical conduction models of the source and drain access regions.

The RF performance can be predicted at an arbitrary bias point.

Table 3 represents a comparison of the values for a high frequency equivalent circuit model derived from equivalent circuit model extraction from and semi-physical modeling for the sample illustrated in Table 2.

Table 2
Comparison of Modeled Equivalent Circuit Results for Semi-physical Modeling Method, and Equivalent Circuit Model Extraction

Intrinsic Equivalent Circuit Parameter	Equivalent Circuit Model	Semi-Physical Devic Model
C_{gs}	0.227745 pF	0.182 pF
R_{gs}	64242 Ω	infinite Ω

Intrinsic Equivalent Circuit Parameter	Equivalent Circuit Model	Semi-Physical Device Model
Cgd	0.017019 pF	0.020 pF
Rgd	133450 Ω	infinite Ω
Cds	0.047544 pF	0.033 pF
Rds	160.1791 Ω	178.1 Ω
Gm	135.7568 mS	124 mS
Ri	3.034 Ω	2.553 Ω
Tau	0.443867 pS	0.33 pS

The results of the semi-physical modeling method produce a small-signal equivalent circuit values which are relatively more accurate than the physical device simulator in this case. Furthermore, given the differences in the parasitic embedding, treatment of the two approaches, the results given in Table 3 yield much closer results than a comparison of equivalent circuit values.

Table 3 lists the values of parasitic elements used in the model derivations. An important difference between the extracted equivalent circuit model and the semi-physically derived one is the use of Cpg and Cpd to model the effect of launch capacitance for the tested structure. This difference leads to the results of the extracted model results being slightly off from the optimum physically significant solution.

Table 3
Comparison of Modeled "Parasitic" Equivalent Circuit Results for Semi-physical Modeling Method, and Equivalent Circuit Model Extraction

Extrinsic Equivalent Circuit Parameter	Equivalent Circuit Model	Semi-Physical Device Model
Rg	1.678 Ω	1.7 Ω
Lg	0.029314 nH	0.03 nH
Rs	1.7 Ω	1.21 Ω
Ls	0.002104 nH	0.003 nH
Rd	3.309899 Ω	5.07 Ω
Ld	0.031671 nH	0.02 nH
Cpg	0 pF	0.02 pF
Cpd	0 pF	0.01 pF

As shown in FIGS. 12, 13 and 14, the modeled results that are simulated using the semi-physically derived equivalent circuit model very accurately replicate the measured high frequency, S-parameter data.

The following equations represent the small-signal excitation derivation of small-signal equivalent circuit modeled Gm. FIG. 65 illustrates the semi-physically simulated bias equations of the small signal Gm compared to measured data.

Semi-Physically Modeled Drain-Source Current Control	I_{ds}	[A]	$= g_{ch} V_{ds} (1 + \lambda V_{ds}) /$
Small-Signal Determination of equiv. Circuit Gm value	g_{mRF}	[S]	$[1 + (V_{ds}/V_{dsat})^m]^{1/m}$
Source-Access voltage drop	V_{sAcc}	[V]	$= dI_{ds} / d(V_{gs} - V_{th})$
Fine Extrinsic Saturation Voltage	V_{sate}	[V]	$= I_{dsat} * (R_{SUnderCmp} + R_{SAccess} + R_{Sboundary} +$
			$R_{probab}/W_g)$
			$= I_{dsat}/g_{ch}$
Extrinsic Conductance of the Linear Region, Under the gate	g_{ch}	[S]	$= g_{ch} /$
Intrinsic Conductance of the Linear Region, Under the gate	g_{chI}	[S]	$[1 + g_{ch}(R_s + R_d)]$
			$= (q N_a \mu_{ave} W_g) / L_g$

The following equations represent the small-signal excitation derivation of Rds. FIG. 66 illustrates the semi-physically simulated biase-dependence of the small-signal Rds.

Small-Signal Determination of equiv. Circuit Rds value	R_{ds}	[Ω]	$= 1 / g_{dsRF}$
	g_{dsRF}	[S]	$= \{ dI_{ds} / d(V_{ds} - R_{probeD} \cdot I_{ds} - V_{sAcc} - V_{dAcc} - V_{dSat}) \} \cdot r_{dsF}$
Drain-Access voltage drop	V_{DAcc}	[V]	$= I_{dsW} \cdot (R_{DUndepCap} + R_{DUndepRec} + R_{DAccess} + R_{probeD} / W_g)$
Drain-Saturated Region voltage drop	V_{DSAT}	[V]	$= I_{dsW} \cdot (R_{DSaturated})$
External Test probe or lead resistance	R_{probeD}	[Ω]	$= (RF_{rdsF} + 1) \cdot \tanh(10 \cdot V_{ds} - V_{th}) + 1$
High Frequency conductance dispersion factor	r_{dsF}	[]	
High Frequency conductance dispersion	RF_{rdsF}	[]	

The following equations may be used for the small-signal excitation derivation of Cgs and Cgd. FIG. 67 illustrates the semi-physically simulated bias-dependence of the small-signal Cgs and Cgd.

5

Small-Signal Determination of equiv. Circuit Rds value	R_{ds}	[Ω]	$= 1 / g_{dsRF}$
	g_{dsRF}	[S]	$= \{ dI_{ds} / d(V_{ds} - R_{probeD} \cdot I_{ds} - V_{sAcc} - V_{dAcc} - V_{dSat}) \} \cdot r_{dsF}$
Drain-Access voltage drop	V_{DAcc}	[V]	$= I_{dsW} \cdot (R_{DUndepCap} + R_{DUndepRec} + R_{DAccess} + R_{probeD} / W_g)$
Drain-Saturated Region voltage drop	V_{DSAT}	[V]	$= I_{dsW} \cdot (R_{DSaturated})$
External Test probe or lead resistance	R_{probeD}	[Ω]	$= (RF_{rdsF} + 1) \cdot \tanh(10 \cdot V_{ds} - V_{th}) + 1$
High Frequency conductance dispersion factor	r_{dsF}	[]	
High Frequency conductance dispersion	RF_{rdsF}	[]	

The following equations are involved in the small-signal excitation derivation of Ri. FIG. 68, which follows, shows the semi-physically simulated bias-dependence of the small-signal Ri.

Gate-Source Non-quasistatic charging resistance	$R_{iCharge}$	[$\Omega \cdot \mu m$]	$= L_{gs2} W_g / [C_{gsChan} W_g v_s]$
Gate-Channel Source Capacitance	C_{gsChan}	[fF/ μm]	$= C_{gs1} + \beta C_{gc} L_{gs} \cdot \{ 1 - [(V_{saton} - V_{dse}) / (2 \cdot V_{saton} - V_{dse})]^2 \}$

10

FIG. 69 below shows the semi-physically simulated bias-dependence of the on-mesa parasitic access resistances, Rs and Rd.

**EXAMPLE OF SEMI-PHYSICAL MODEL AND BIAS-DEPENDENCE
SMALL-SIGNAL SOURCE AND DRAIN RESISTANCE, RS AND RD.**

5 The following example verifies how the semi-physical small-signal device model is able to provide accurate projections for bias-dependent small-signal performance. In this example, the same semi-physical device model as used in the previous examples was used because the example MMIC circuit was fabricated utilizing the same HEMT device technology.

In this example, the bias-dependence small-signal gain and noise performance of a two-stage balanced K-band MMIC LNA amplifier is replicated through microwave circuit simulation using small signal and noise equivalent circuits that were generated by the semi-physical model. The results of the measured and modeled results are shown below in Table 4. As seen from these results, the semi-physical device model was able to accurately simulate the measured bias-dependent performance, even though the bias variation was quite wide.

Table 4
Measured vs. Modeled Gain NF and Gain @ 23.5 Ghz for K-band MMIC LNA at
Difference Bias Conditions

Bias Condition	Measured Gain @ 23.5 GHz	Predicted Gain @ 23.5 GHz	Measured NF @ 23.5 GHz	Predicted NF @ 23.5 GHz
Vds=0.5 V 112 mA/mm	15.2 dB	15.8 dB	2.97 dB	2.77 dB
Vds=1.0 V 112 mA/mm	20.6 dB	21.0 dB	2.29 dB	2.20 dB
Vds=2.0 V 112 mA/mm	19.8 dB	20.2 dB	2.25 dB	2.15 dB
Vds=3.0 V 112 mA/mm	18.9 dB	19.1 dB	2.30 dB	2.11 dB
Vds=3.5 V 112 mA/mm	18.4 dB	18.5 dB	2.34 dB	2.18 dB
Vds=4.0 V 112 mA/mm	18.0 dB	18.0 dB	2.37 dB	2.27 dB
Vds=2.0 V	16.4 dB	18.0 dB	2.45 dB	2.21 dB

56 mA/mm				
V_{ds}=2.0 V	21.4 dB	20.9 dB	2.38 dB	2.21 dB
170 mA/mm				
V_{ds}=2.0 V	22.2 dB	21.0 dB	2.65 dB	2.6 dB
225 mA/mm				
V_{ds}=3.0 V	21.4 dB	20.3 dB	2.71 dB	2.61 dB
225 mA/mm				
V_{ds}=3.0 V	20.5 dB	20.0 dB	2.42 dB	2.22 dB
170 mA/mm				
V_{ds}=4.0 V	19.6 dB	19.2 dB	2.50 dB	2.29 dB
170 mA/mm				

A plot of measured vs. modeled gain for the values listed in Table 3, above, is shown in FIG. 70.

EXAMPLE OF SEMI-PHYSICAL MODEL ACCURATE PHYSICAL NATURE

The following example verifies how the semi-physical small-signal device model is able to provide accurate projections for physically dependent small-signal performance. In this example, the same semi-physical device model as used in the previous examples was used.

In this example, physical process variation was input into the semi-physical device model in terms of statistical variation about known averages, cross-correlation, and standard deviations. The goal of this exercise was to replicate the measured DC and small-signal device variation. The degree of accurate replication indicates the degree to which the semi-physical model is physically accurate.

Table 5 below lists the simulated, and known process variation that was used:

Table 5
Statistical Process Variation Model

<u>Parameter</u>	<u>Nominal</u>	<u>Standard Dev.</u>
Gate Length	0.15 μm	0.01 μm
Gate-Source Recess	0.16 μm	0.015 μm
Gate-Drain Recess	0.24 μm	0.020 μm
Etch Depth	780 \AA	25 \AA
Pass. Nitride Thickness	750 \AA	25 \AA
Gate-Source Spacing	0.7 μm	0.1 μm
Source-Drain Spacing	1.8 μm	0.15 μm

In the course of microelectronic component production, sample devices are tested in process in order to gain statistical process control monitor (PCM) data. FIGs 71A and 71B shows schematically the kind of data that is extracted and recorded from measured device I-V's during PCM testing.

Since the semi-physical device model is able to simulate I-V's, it was able to simulate the variation of I-V's due to physical process variation. These I-V's were analyzed in the same fashion to extract the same parameters that are recorded for PCM testing. Figures 72, 73 and 74 show how accurately the simulated results match with measured process variation. Figure 72 shows how the semi-physically simulated V_{gpk} and G_{mpk} match with actual production measurements. Figure 73 shows how simulated I_{dpk} and G_{mpk} match, also. Finally, FIG. 74 shows how simulated I_{max} and V_{po} also match very well.

Small-signal S-parameter measurements are also taken in process for process control monitoring. These measurements are used to extract simple equivalent circuit models that fit the measured S-parameters. Since the semi-physical device model is able to simulate these equivalent circuit models, it was able to simulate the variation of model parameters due to physical process variation.

Figures 75 and 76 show how accurately the simulated results match with measured/extracted process variation for the small-signal model parameters. Figure 75 shows how the semi-physically simulated R_{ds} and G_m match very well with actual extracted model process variation

More direct and convincing evidence supporting the accurate, physical nature of the semi-physical model can be shown by comparing the dependence of simulated and measured performance to real physical variable. As shown in Figure 77, the semi-physical model is able to very accurately reproduce the dependence of I_{max} upon gate length. In addition, the semi-physical model is also able to replicate physical dependence for high-frequency small-signal equivalent circuits. This is shown in Figure 78, which shows that it is able to reproduce the dependence of R_{ds} with Recess undercut width.

HYBRID APPROACH

As mentioned above, the modeling approach in accordance with the present invention is a hybrid of semi-physical and data-fitting modeling. The first step in the hybrid modeling approach is to derive a semi-physical device model as discussed above. Secondly, a data-fitting nonlinear device model whose expressions satisfy the charge conservation law is selected. An exemplary data-fitting nonlinear device model is disclosed in "A New Empirical Model for HEMT Devices," by Y. C. Chen, IEEE Microwave Guided Wave Letters, Vol. 8, No. 10, October 1998. This model satisfies the charge conservation constraint for current. In order to complete the description of the nonlinear model the following charge expressions are used:

$$\begin{aligned} &= (C_{gmax} + C_{gmin}) * V_{gs} / 2 + C_{gd} * (V_{ds} - V_{gs}) \\ \text{Gate Charge (Empirical Nonlinear Model)} \quad Q_G [C] &= (C_{gmax} - C_{gmin}) * \ln \{ \cosh [\alpha_c (V_{gs} - V_{g0})] \} / (2^{\alpha_{cg}}) \end{aligned}$$

This equation satisfies the conservation constraints for charge as follows:

$$\frac{\partial Q_g}{\partial V_{gs} \partial V_{ds}} \equiv \frac{\partial Q_g}{\partial V_{ds} \partial V_{gs}}$$

This condition, which is requisite for path integration independence of the expressed charge is satisfied by the expression above.

FIG. 15 demonstrates that the chosen nonlinear data-fitting model relatively accurately fits the semi-physically modeled I-V characteristics. The nonlinear model that is chosen in this example is "A New Empirical Model for HEMT Devices, supra. FIG. 16 demonstrates how the semi-physical model relatively accurately models the measured IV characteristics. By transitivity the nonlinear data-fitting model fits the measured characteristic.

Table 6 below lists the model parameters used with the data-fitting model to fit the semi-physically modeled data.

Table 6
Parameters Used in the Nonlinear Data-Fitting Model

Data-Fitting Model Parameter	Units	Value
Wref	[um]	200
Tau	[ps]	0.33
Cgmax	[pF]	0.178
Cgmin	[pF]	0.04
Acg	[]	5.5
Vcg	[V]	-0.73
Cds	[pF]	0.031971822
Cdg	[pF]	0.016268
Cff	[pF]	1000000
Rc	[ohm]	5000
Ri	[ohm]	5.841183873
Rg	[ohm]	0.858333333
Rs	[ohm]	1.338126967
Rd	[ohm]	3.74236047
Lg	[nH]	0.018
Ld	[nH]	0.015
Ls	[nH]	0
Isatdiode	[A]	1E-13
Ndiode	[]	1.2
Rdiode	[ohm]	32.5
Ipk	[A]	0.122875
Vk	[V]	0.606207
Lam	[1/V]	0.019058
A00	[]	-2.167863
A01	[]	0.088367
A02	[]	-0.001507
A10	[]	2.805016
A11	[]	-0.019706
A12	[]	-0.005367
A20	[]	-1.205267
A21	[]	0.167415
A22	[]	-0.010151
A30	[]	4.494973
A31	[]	-0.964896
A32	[]	0.050914
A40	[]	0.446656
A41	[]	-0.145595
A42	[]	0.008631
Vgmax	[V]	0.6
Vgmin	[V]	-1.4
Rldg	[ohm]	1000000
Rlgs	[ohm]	35000
Vpo	[V]	-0.6797

FIG. 17 illustrates the implementation of the nonlinear data-fitting model into a commercially available microwave CAD tool, for example, LIBRA 6.1 by Agilent

Technologies. The LIBRA 6.1 CAD tool contains large signal simulation capabilities based on the harmonic balance algorithm. The particular view shown in FIG. 17 illustrates the circuit element schematic that was implemented and not the actual enabling implementation of the user defined model which is normally implemented as a computer program code extension to LIBRA 6.1. The procedures by which user-defined models may be added to LIBRA 6.1 are discussed in detail in User's Manual entitled "User-Defined Elements", Series VI User Manuals, released 6.0 Hewlett Packard, HP Part No. E4605-90033, July 1995.

FIGS. 18A and 18B illustrate how the hybrid device modeling produces relatively accurate large signal simulation results. In particular, the input power response is shown for a two-stage balanced high-power amplifier at a frequency of 22.5 GHz. The measured responses are shown in FIG. 18B while the simulated response is shown in FIG. 18A. As shown, the measured vs. model responses are relatively close to each other indicating a relatively high degree of accuracy for the device modeling process.

The following example demonstrates the ability of the approach to accurately incorporate the effect known physical process changes into the simulation of large signal device characteristics. The multiple curves that are shown in each plot of FIGS. 18A and 18B may be obtained from: several measured circuits from a plurality (i.e. 13) wafers in the case of measured data; and simulated performance variation due to simulated physical process variation. The simulated process variation used is as discussed below under the caption "PM² Process Perturbation to Measured Model Method for Semiconductor Device Technology Modeling". The parameters used to simulate the process variation are provided below in Table 7.

The tables that have been generated for a 0.15 micrometer HEMT process relate to a realistic distribution of physical process variation. The following process parameters were varied accordingly as shown in Table 7.

Table 7
Physical Process Variation Model Parameters

<u>Parameter</u>	<u>Nominal</u>	<u>Standard Dev.</u>
Gate Length	0.15 μm	0.01 μm
Gate-Source Recess	0.16 μm	0.015 μm
Gate-Drain Recess	0.24 μm	0.020 μm
Etch Depth	780 \AA	25 \AA
Pass. Nitride Thickness	750 \AA	25 \AA
Gate-Source Spacing	0.7 μm	0.1 μm
Source-Drain Spacing	1.8 μm	0.15 μm

A physical correlation may be simulated between the recess spacing and gate length. A correlation factor of 0.5 between gate length and both recess dimensions may be incorporated in the semi-physical model statistics. Although the process variation described above is simple and realistic it is adequate in describing all of the DC and RF performance variations for wafer means/medians.

PROCESS PERTURBATION TO MEASURED MODELED METHOD FOR SEMICONDUCTOR DEVICE TECHNOLOGY MODELING

A method for modeling semiconductor devices based upon a process perturbation to measured modeled (PM²) methodology can be used to develop a physically-based technology model that ultimately becomes more and more accurate as more and more process perturbation experiments are performed. As shown in FIG. 19, various parameters, such as device scaling, bias dependence, temperature dependence, layout dependence and process dependence can be modeled using this technique to analyze measurements taken for any imaginable set of process perturbations. The more measurements that are taken, the semi-physical model becomes more and more "corrected". For example, by performing more PM² experiments in which the gate length of high electron mobility transistor (HEMT) samples are varied to much longer lengths than originally studied, the models for velocity saturation and effective gate source charge control length can be refined to provide more accurate results for longer

gate lengths. Also, by performing temperature dependent measurements the temperature dependence on the material parameters is able to be refined to better fit the modeled to the measured results.

An important part of the PM^2 modeling methodology is a measured-to-model microscope (i.e. S-parameter microscope) which is able to look into the "guts" of a semiconductor device. With this capability a relatively comprehensive physically-based model for the entire device technology can be developed.

The perturbation method is discussed below in connection with FIGS. 19-24. An important aspect of the perturbation method is a measured-to-model microscope (S-parameter microscope) as discussed below in connection with FIGS. 25-39. The measured-to-model microscope may utilize a filter in order to remove the contribution of device layout parasitics to the modeled electrical characteristics. This may be done to accomplish clear representations of the internal physical operation for the measured device. One embodiment of such a filter for P-FET layouts is discussed in connection with FIGS. 40-58. The exemplary measured-to-model microscope, also called an S-parameter microscope, utilizes an extraction algorithm for extracting modeled parameters as generally discussed in connection with FIGS. 59-64.

The following example illustrates the use of the PM^2 modeling concept to create a complete, physically-based model for the source resistance of a HEMT device. The PM^2 experiment is used to determine the physical model characteristics are as follows:

1) Characterize standard HEMT samples

A) Use standard fabrication process to produce HEMT samples that are embedded within a standard device layout.

B) Collect information regarding the physical dimensions of the source-access region by way of a scanning electron microscope (SEM).

C) Test the sample devices using S-parameter microscopy to establish physically representative equivalent models.

2) Characterize the standard HEMT samples with device layout experiments

A) Use standard fabrication process to produce HEMT samples that have device layout experiments that vary the physical dimensions of the source access region, for example, gate source spacing etc.

B) Collect information regarding the physical dimensions of the source access region by way of SEM.

C) Test the sample devices with S-parameter microscopy to establish physically representative equivalent models.

3) Characterize the HEMT samples with a thin GaAs "cap"

A) Use standard fabrication process to produce thin cap HEMT samples embedded within the standard device layout.

B) Collect information regarding the physical dimensions of the source access region by way of a SEM.

C) Test using S-parameter microscopy to establish physically representative equivalent models.

A cross-sectional diagram of the HEMT sample used in the example is illustrated in FIG. 21A. A diagram of a standard device for a standard Pi-FET example layout is shown in FIG. 51A. A cross-sectional diagram of the material epi-stack present in the HEMT is shown in FIG. 7B. For the third part of the PM² experiment above, the GaAs cap is thinned down to 7.5 nm instead of the standard thickness of 50 nm keeping the same doping density.

After a sample wafer is fabricated for the standard HEMT sample, Scanning Electron Microscopy (SEM) is used to determine the dimensions of the critical structural components. The measured and intended structural dimensions are identified in Table 8 below, where measured refers to SEM determined dimension and standard indicates the normal or intended specification. Each of the dimensions listed in Table 8 are correlated to the cross-sectional diagram illustrated in FIG. 21A.

Table 8
SEM Measured and Intended Structural Dimension for a "Standard" HEMT Device Sample

	units	Measured	Standard
Lg	[μm]	0.15	0.15
Dsg	[μm]	0.78	0.8
Dsd	[μm]	1.935	2
Lg+RECsg+RECgd	[μm]	0.56	0.52

Next, S-parameter microscopy as described below and in connection with FIGS. 25-64 is used to determine physically representative, model representations of the source access resistance. The exemplary Pi-FET may be modeled and used as a filter in the S-parameter microscopy as generally described. This is accomplished by measuring the S-parameters of the sample devices up to 40 GHz and subsequently extracting equivalent small signal circuit models as discussed in detail below in connection with S-parameter microscopy. The small signal equivalent circuit model serves as an electrical representation of the physical structure of the measured device and can be used to roughly sketch the details of its internal structure. The correspondence between equivalent circuit elements and structural items within the device are shown in FIG. 28 below. The relationship of the quantity "Rs" and the source access region is shown.

The results of the S-parameter microscopy measurements are shown in FIG. 36 which plot the bias dependent characteristics of the source resistance Rs. From these bias dependent characteristics, a preliminary physical model which fits the measured data can be constructed.

Three physical effects were found to contribute to the overall behavior of the measured source resistance: resistance of the access region before the region; resistance within the source access recess; and a boundary resistance caused by sudden change in sheet carrier concentration between the source access and the channel directly under the gate. These phenomena and their physical locations within the source access recess are illustrated in FIG. 23, where the regions 1, 2 and 3 correspond to each of the effects discussed above.

From these observations, a form of semi-physical model describing bias-dependent characteristics of R_s in a HEMT device can be established as set forth in the equations below.

$$R_s \quad [\Omega] = (R_{S\text{undepCap}} + R_{S\text{Access}} + R_{S\text{Boundary}}) / W_g$$

$$R_{S\text{undepCap}} \quad [\Omega \cdot \mu\text{m}] = R_{\text{conf}} / R_{F\text{conf}} + R_{\text{SH}} [D_{\text{sg}} - (\text{REC}_{\text{sg}} + L_g / 2)]$$

In part two of the PM² experiment, the HEMT device samples are fabricated and tested and the length of the source access region is intentionally varied. After the samples are fabricated, the intended dimensions are verified through SEM. S-parameter microscopy is also used to extract the source resistance for comparison. The experimental source gate dimensions along with the extracted source resistance at a bias point of $V_{\text{ds}} = 1.0$, $V_{\text{gs}} = 0.01$ are provided in Table 9 below.

Table 9
Extracted Source Resistance vs. Source-Gate Distance

$D_{\text{sg}} \text{ } [\mu\text{m}]$	$R_s \text{ } [\Omega]$
0.4	1
0.8	1.2
1	1.3
1.2	1.45
Measured Sheet Res:	109.1 Ω/sq
Extracted Sheet Res:	110 Ω/sq

The data in Table 9 is used to confirm the preliminary semi-physical model for Region I's source-access resistance ($R_{\text{SundepCap}}$) illustrated above. This confirmation can be verified by comparing the extracted sheet resistance (R_{sh}) by S-parameter microscopy and the PM² experiments against sheet resistance extracted by an independent Van der Pauw measurements. "Modern GaAs Processing Methods" by

Ralph Williams, Artech House, Norwood, MA 1990. Even though the experiment may be conducted using HEMT devices with a different material or epi stack, the experiment illustrates the validation of a semi-physical model form for Region 1 resistance. Also the terms RECsg and Lg may be assumed to be roughly constant for all of the Dsg test samples. In the final part of the PM² experiment, the full form of the semi-physical source resistance model is validated. Based on the full bias dependent measurement of the part 1, the complete semi-physical model expression source resistance as a function of gate and drain bias can be represented in the equations below:

$$\begin{aligned}
 R_s \quad [\Omega] &= (R_{S\text{undepCap}} + R_{S\text{Access}} + R_{S\text{Boundary}}) / W_g \\
 &= R_{\text{cont}} / R_{\text{conf}} + \\
 R_{S\text{undepCap}} \quad [\Omega \cdot \mu\text{m}] &= R_{\text{SH}} [D_{\text{sg}} - (\text{REC}_{\text{sg}} + L_g / 2)] \\
 &= R_{\text{SdepRec}}^{\text{ON}} * MR_s * \tanh \{ [KC_{\text{TK}} * (V_{\text{gs}} - V_{\text{C}_{\text{fOn}}} + V_{\text{ds}} * MC_{\text{TL}})) + 1 \} / 2 * \\
 &\quad \{ V_{\text{gs}} / 2 * [1 - \tanh(KR_{\text{sK}}(V_{\text{gs}} - V_{\text{R}_{\text{sOn}}}))] \} * \\
 R_{S\text{Access}} \quad [\Omega \cdot \mu\text{m}] &= \tanh [KR_{\text{sSat}}(V_{\text{ds}} - V_{\text{R}_{\text{sKnee}}}) + 1] / 2 + R_{\text{SundepRec}} * \\
 &\quad \{ \tanh [KR_{\text{sK}}(V_{\text{gs}} - V_{\text{R}_{\text{sOn}}}) + 1] / 2 \\
 &= R_{\text{SdepRec}}^{\text{ON}} * MR_s * \tanh \{ (KR_{\text{sK}} * V_{\text{gs}} + KR_{\text{sL}} * V_{\text{ds}} + \\
 &\quad V_{\text{R}_{\text{sOff}}}) + 1 \} / 2 * \{ (1 + V_{\text{ds}} * MR_{\text{sL}}) * MR_{\text{sK}} * [1 \\
 &\quad \tanh(KR_{\text{sSat}}(V_{\text{ds}} - V_{\text{R}_{\text{sKnee}}})) / [2 * (1 + [V_{\text{gs}} / ((1 \\
 R_{S\text{Boundary}} \quad [\Omega \cdot \mu\text{m}] &\quad + V_{\text{ds}} * MR_{\text{sL}}) * MR_{\text{sK}})]^{R_s})^{(1/\gamma_{\text{Rs}})}] \}
 \end{aligned}$$

The simulated result for the sample fabricated in part 1 of the PM² experiments is shown in FIG. 24A. Comparing FIG. 24A with FIG. 36 indicates that the semi-physical model adequately replicates the measured results. The result of the experiment is shown below in FIG. 24B. As expected the bias dependent source resistance of the thin "cap" sample has the same form, only offset higher by an amount that corresponds to the change in Rsh in Region 1 of the source access.

S-PARAMETER MICROSCOPY

The S-parameter Microscopy (SPM) method utilizes bias dependent S-parameter measurements as a form of microscopy to provide qualitative analysis of the internal charge and electrical field structure of the semiconductor device heretofore unknown. Pseudo images are gathered in the form of S-parameter measurements extracted as small signal models to form charge control maps. Although finite element device simulations have heretofore been used to calculate the internal charge/electric field of semiconductor devices, such methods are known to be relatively inaccurate. The S-parameter microscopy provides a relatively accurate method for determining the internal charge and electric field within a semiconductor device. With accurate modeling of the internal charge and electric field, all of the external electrical characteristics of the semiconductor devices can be relatively accurately modeled including its high frequency performance. Thus, the system is suitable for making device technology models that enable high frequency MMIC yield analysis forecasting and design for manufacturing analysis.

S-parameter microscopy is similar to other microscopy techniques in that SPM utilizes measurements of energy reflected to and from a sample to derive information. More particularly, SPM is based on transmitted and reflective microwave and millimeter wave electromagnetic power or S-parameters. As such, S-parameter microscopy is analogous to the combined operation of scanning and transmission electron microscopes (SEM and TEM). Scattered RF energy is analogous to the reflection and transmission of the electron beams in the SEM and TEMs. However, instead of using electron detectors as in the SEM and TEMs, reflectometers in a network analyzer are used in S-parameter microscopy to measure a signal. S-parameter microscopy is similar to other microscopy techniques in that both utilize; measurement of scattering phenomenon as data; include mechanisms to focus measurements for better resolution; and include mechanisms to contrast portions of the measurement to discriminate detail as shown in Table 10 below:

Table 10

General Microscopes	S-Parameter Microscope
Measure of <i>scattered energy</i>	Measures <i>S-Parameters</i>
Mechanism for " <i>focus</i> "	Focuses by <i>extraction of Unique equivalent circuit models</i>
Mechanism for " <i>contrast</i> "	Contrasts by using <i>bias dependence</i> to finely discriminate the nature and location of charge/electric fields

RESULT: Detailed "images" of device's internal charge and electric field structure.

Images as discussed herein, in connection with S-parameter microscopy do not relate to real images, but are used provide insight and qualitative detail regarding the internal operation of a device. More specifically, S-parameter microscopy does not provide visual images as in the case of traditional forms of microscopy. Rather, S-parameter microscopy images are more like maps which are computed and based on a non-intuitive set of measurements.

FIG. 25 illustrates a conceptual representation of an S-parameter microscope generally identified with the reference numeral 20. The S-parameter microscope 20 is analogous to a microscope which combines the principles of SEM and TEM. Whereas SEM measures reflections and TEM measures transmissions, the 2-port S-parameter microscope 20 measures both reflective and transmitted power. As a result, data derived from the 2-port S-parameter microscope contains information about the intrinsic and extrinsic charge structure of a device. More particularly, as is known in the art, SEM provides relatively detailed images of the surface of a sample through reflected electrons while TEM provides images of the internal structure through transmitted electrons. The reflective signals are used to form the external details of a sample while transmitted electrons provide information about the interior structure of a device. In accordance with an important aspect of the invention, S-parameter microscopy utilizes a process of measuring reflective and transmitted signals to provide similar "images" of the charge structure of a semiconductor device. As used herein the

internal and external electrical structure of a semiconductor device are commonly referred to as intrinsic device region and 22 and extrinsic parasitic access region 24 as shown in FIG. 26. Also contributing to the external electrical structure of the device are parasitic components associated with its electrodes and interconnects, which are not shown. These are "layout parasitics" the so-called device or its so-called internal electrical structure.

Referring to FIG. 25, the ports 26 and 28 are emulated by S-parameter measurements. The S-parameter measurements for a specific semiconductor device, generally identified with the reference number 30, are processed in accordance with the present invention to provide charge control maps, shown within the circle 32, analogous to images in other microscopy techniques. These charge control maps 32, as will be discussed in more detail below, are expressed in the form of equivalent circuit models. As shown in FIG. 27, the linear circuit elements may be used in the models to represent the magnitude and state of charge/electric fields inside the semiconductor device 30. The position of the circuit elements within the model topology is roughly approximate the physical location within the device structure, hence the charge control map represents a diagram of the device's internal electrical structure.

The interpretation of the exact location of measured charge/electric fields within the semiconductor device is known to be ambiguous since an equivalent circuit model, for example, as illustrated in FIG. 28 with discrete linear elements, is used to represent the distributed structure of the charge/electric fields in the actual device. Although there is no exact method for distinguishing the physical boundaries between measured quantities, bias dependence is used to clarify how the S-parameters should be discriminated, separated and contrasted. In particular, changing bias conditions is known to change the magnitude and shift boundaries between the charge and electric fields within the device. The changes are normally predictable and qualitatively well known in most technologies. As such, the charge control maps can readily be used as maps illustrating the characterization of physical changes in magnitude, location and separation of electric charge and electric fields.

Analogous to other forms of microscopy; the S-parameter microscope 20 emulates a lens, identified with the reference numeral 40 (FIG. 25). The lens 40 is simulated by a method for the extraction of a unique equivalent circuit model that also accurately simulates the measured S-parameter. More particularly, parameter extraction

methods for equivalent circuit models that simulate S-parameters are relatively well known. However, when the only goal is accurately fitting measuring S-parameters, an infinite number of solutions exist for possible equivalent circuit parameter values. Thus, in accordance with an important aspect of the present invention, only a single unique solution is extracted which accurately describes the physical charge control map of the device. This method for unique extraction of equivalent circuit model parameters acts as a lens to focus the charge control map solution. As discussed and illustrated herein, the lens 40 is subsequently simulated by a filter that is based on an apparent layout parasitic embedding model. As discussed below, the layout parasitic embedding model consists of linear elements which simulate the effect of the device's electrodes and interconnects upon its external electrical characteristics. A Pi FET embedding model 42, is described below. This model effectively acts as a filter to remove the electrical structure of the extrinsic parasitic access contribution to the preliminary charge control map solution. The resultant filtered charge control map solution represents a clearer "image" which shows only the electrical structure of the intrinsic device. This enhanced imaging is needed in order to achieve as accurate a view of the internal electric charge/field as possible. Unlike conventional extraction techniques as illustrated in FIG. 30, which can only extract non-unique equivalent circuit models and not the unique charge control map, the S-parameter microscope 20 is able to relatively accurately model the internal electric charge/field structure within a semiconductor device.

An exemplary application of the S-parameter microscope is illustrated in detail below. In this example, an exemplary GaAs HEMT device with four gate fingers and 200 μ m total gate periphery formed in a Pi-FET layout as generally illustrated in FIG. 31 and identified with the reference numeral 43, is used. The GaAs HEMT 43 is adapted to be embedded in a 100- μ m pitch coplanar test structure to facilitate on water S-parameter measurement.

Initially, as illustrated in FIGS. 32 and 33, the I-V characteristics for the device are measured. In particular, the drain source current I_{ds} is plotted as a function of drain-to-source voltage V_{ds} at various gate voltages V_{gs} as shown in FIG. 32. and FIG. 33 illustrates the drain-to-source current I_{ds} as a function of gate voltage V_{gs} and transconductance G_m (i.e. the derivative of I_{ds} with respect to V_{gs}) at different drain

voltages V_{ds} . These I-V characteristics are typical of HEMT devices, which are one type of three-terminal semi-conductor device technology.

Table 11 shows the bias conditions in which S-parameters were measured. The S-parameters were measured from 0.05 to 40 GHz at each bias condition. FIG. 34 illustrates a Smith chart illustrating the measured S-parameters S_{11} , S_{12} and S_{22} for frequencies from 0.05 to 40.0 GHz. FIG. 35 is a graphical illustration of magnitude as a function of angles for the measured S-parameter S_{21} for frequencies from 0.05 to 40.0 GHz.

TABLE 11
Measured S-parameter Bias Conditions

Biases	$V_{ds} =$	$V_{ds} =$	$V_{ds} =$	$V_{ds} =$	$V_{ds} =$	$V_{ds} =$
V_{gs}	0 V	0.5 V	1.0 V	2.0 V	4.0 V	5.0 V
-1.6 V	Yes	Yes	Yes	Yes	Yes	Yes
-1.4 V	Yes	Yes	Yes	Yes	Yes	Yes
-1.2 V	Yes	Yes	Yes	Yes	Yes	Yes
-1 V	Yes	Yes	Yes	Yes	Yes	Yes
-0.8 V	Yes	Yes	Yes	Yes	Yes	Yes
-0.6 V	Yes	Yes	Yes	Yes	Yes	Yes
-0.4 V	Yes	Yes	Yes	Yes	Yes	Yes
-0.2 V	Yes	Yes	Yes	Yes	Yes	Yes
0 V	Yes	Yes	Yes	Yes	Yes	Yes
0.2 V	Yes	Yes	Yes	Yes	Yes	Yes
0.4 V	Yes	Yes	Yes	Yes	Yes	Yes
0.6 V	Yes	Yes	Yes	Yes	Yes	Yes

Using the small signal model illustrated in FIG. 28, the extracted small signal equivalent circuit values are obtained as illustrated in Table 12 for each S-parameter at each bias condition, using the extraction method discussed below.

Table 12
Bias-dependent Small-signal Equivalent Circuit Models

Vd	Vg	Rg+Ri	Rs	Rd	Lg	Ls	Ld	Cgs	Cdg	Cds	Gm	Rds	Tau	Rgs	Rgd
[V]	[V]	[W]	[W]	[W]	[nH]	[nH]	[nH]	[pF]	[pF]	[pF]	[mS]	[W]	[pS]	[W]	[W]
0.5	1.6	4.80961	0.5	4	0.03374	0.0	0.01699	0.04725	0.03892	0.04621	0.223	1.02E+08	0.12	100403	810E
0.5	1.4	4.24223	0.5	3.53898	0.02817	0.0	0.02476	0.05172	0.03907	0.04440	0.5	10000000	0.12	100403	810E
0.5	1.2	3.91986	0.5	3.92313	0.02913	0.00030	0.02260	0.05921	0.03981	0.04616	0.732	1.08E+08	0.67	274105	9.23E-07
0.5	1.0	3.56620	0.5	3.71111	0.02891	0.00354	0.02758	0.07264	0.03983	0.04586	5.672	7.00E+02	0.24	53005307	1.98E-07
0.5	0.8	3.22405	0.7	3.65139	0.02841	0.00319	0.02461	0.09073	0.04253	0.04625	28.000	254.802	0.26	6364132	6.95E-07
0.5	0.6	2.78789	0.6	3.50019	0.02953	0.00337	0.02583	0.10155	0.04589	0.04748	73.800	8425923	0.16	1506623	6.36E-07
0.5	0.4	1.71421	0.6	1.333	0.03058	0.00343	0.02529	0.08533	0.05957	0.0669	107.5	389004	0.00	947E-07	7.7782E-07
0.5	0.2	0.14250	3.3	3.3	0.01916	3.78E-09	0.02305	0.14987	0.05706	0.35247	161	943176	0.03	1644035	9.70E-07

0.5	0	2.35912	3.4	3.4	0.02067	0.00373	0.01532	0.16889	0.09085	0.5	108	7	150	1000E+08	100E+08
0.5	0.2	3.30807	3.5	3.30807	0.01797	0.00563	0.02082	0.21366	0.04018	1.4	100	1.45897	447	9015.727	100E+08
0.5	0.4	3.00269	3.5	3.00269	0.02537	0.00556	0.02400	0.1115	0.115	2	85	1.2	156	8630.088	90E+07
0.5	0.6	2.61956	3.6	2.61956	0.03453	0.00356	0.02748	0.219	0.00152	2.1	75	1.4	0.08	269.1635	90E+07
1	-1.6	0.04221	0.5	3.9	0.03766	0.00001	0.01	0.04706	0.03607	0.04717	0.038	1.03E+08	735	10980.53	1.02E+08
1	-1.4	5.37668	0.5	3.53120	0.04292	0.00070	0.01	0.04880	0.03632	0.04857	0.086	1.23E+08	0.14	71680.16	9.70E+07
1	-1.2	3.73022	0.6	4.38390	0.02639	0.0	0.03059	0.06252	0.03581	0.04551	1.391	1.03E+08	0.81	42870.63	1.00E+08
1	-1	2.83050	2.6	3.7	0.03139	0.00013	0.02741	0.07956	0.03434	0.04721	8.764	6.96E+07	0.24	9.80E+07	97029.9
1	-0.8	3.38450	0.6	3.35829	0.02891	0.00373	0.02546	0.10424	0.03365	0.04472	37.04	266.1964	0.50	54006.62	13613.8
1	-0.6	3.00864	0.5	2.68486	0.02976	0.00429	0.02656	0.12806	0.02974	0.04391	80.78	137.6002	0.39	68255.46	13613.8
1	-0.4	2.20164	1	5.24976	0.03200	0.00355	0.02460	0.13702	0.02568	0.05399	104.4	113.1406	0.15	139239.2	153397.8
1	-0.2	1.77701	1.4	6.13975	0.03218	0.00296	0.02378	0.14376	0.02312	0.06141	116	94.51954	0.08	5067.04	153397.8
1	0	2.04598	1.2	3.76638	0.03204	0.00341	0.02636	0.14735	0.02295	0.06126	108	116.7009	0.12	82594.56	153397.8
1	0.2	2.25956	1.1	0.67552	0.03031	0.00405	0.02972	0.15401	0.02543	0.06518	100	97.92344	0.26	62352.54	159626.4
1	0.4	2.11654	1.4	1.20729	0.03023	0.00451	0.02767	0.15538	0.03258	0.09048	82.93	46.7057	0.22	62140.25	143076.9
1	0.6	2.68064	1.06066	0.53210	0.02779	0.00522	0.02902	0.15025	0.04746	0.10476	59.07	29.71128	0.31	32295.59	9.41E+07
2	-1.6	4.21832	0.36612	3.64439	0.02189	0.00007	0.02715	0.04902	0.03373	0.04284	0.018	3.74E+07	1.00	66865.99	17257.9
2	-1.4	4.16045	0.35355	3.78284	0.03206	0.0	0.00986	0.05184	0.03363	0.04633	0.321	2.26E+08	1.65	762E+07	6.5E+07
2	-1.2	3.97092	0.4	2.95737	0.01991	0.00355	0.02582	0.08850	0.03172	0.04346	1.460	752.215	0.34	1.969.95	13076.9
2	-1	3.43921	0.58579	3.03263	0.02177	0.00369	0.02686	0.10341	0.03367	0.04403	3.671	267.6627	0.52	9.90E+07	0.1000
2	-0.8	3.14409	0.85355	2.82957	0.02363	0.00351	0.02706	0.15517	0.02427	0.04545	86.93	150.9714	0.56	66897.18	48886.4
2	-0.6	2.61645	1.06066	4.45931	0.02464	0.00350	0.02666	0.16323	0.02155	0.05049	109.7	188.1298	0.34	136869	13869
2	-0.4	2.16237	1	5.63054	0.02558	0.00343	0.02524	0.16894	0.01990	0.05282	115.9	144.5568	0.24	28720.56	54931.8
2	-0.2	2.31075	0.9	5	0.02351	0.00358	0.02701	0.15357	0.01906	0.04803	108.71	157.9708	0.36	4243.77	43071.9
2	0	2.09877	0.85355	4.76720	0.02557	0.00359	0.02535	0.15291	0.01879	0.05078	105.2	155.8182	0.27	19029.68	12571.5
2	0.2	2.64301	0.85355	3.23486	0.0244	0.00356	0.02806	0.15727	0.01802	0.04871	96.42	163.3582	0.27	8117.85	10E+08
2	0.4	3.03424	0.85355	1.80413	0.02341	0.00356	0.02801	0.16401	0.01776	0.04788	79.14	171.8245	0.33	95099.07	1.05E+08
2	0.6	3.45639	1	0.61175	0.02245	0.00351	0.02800	0.17494	0.01767	0.04798	63.09	179.6613	0.48	47169.75	1.27E+08
4	-1.6	1	0.6	3.6	0.03900	0.00007	0.01	0.04765	0.03174	0.04984	0.111	8.95E+07	5.46	15181.61	9.90E+07
4	-1.4	4.71381	0.5	3.43796	0.02063	0.00014	0.02710	0.05937	0.03122	0.04303	1.410	7171.182	1.58	8.02E+07	1.24E+08
4	-1.2	4.42193	1.3	3.2	0.02717	0.00002	0.00124	0.07691	0.02927	0.05239	7.582	1.03E+08	1.52	75390.74	9.51E+07
4	-1	4.28211	1.6	3.1306	0.02220	0.00226	0.02517	0.11961	0.02672	0.04456	31.09	417.6118	1.08	72214.74	102070
4	-0.8	3.92452	1.5	3.05507	0.02333	0.00280	0.02668	0.16912	0.02270	0.04603	68.77	204.0465	0.84	35767.7	147412.3

4	-0.6	3.45589	1.3	3.81853	0.02435	0.00303	0.02526	0.19074	0.02048	0.04833	93.20	171.7183	0.71	32817.08	148886.4
4	-0.4	3.15713	1.4	5.52029	0.0254	0.00245	0.02235	0.19523	0.01899	0.05190	109.7	167.8084	0.57	8.77E+07	150375.2
4	-0.2	3.03221	1.1	3.87285	0.02483	0.00311	0.02631	0.18804	0.01819	0.04922	108.9	184.4907	0.56	31725.31	148886.4
4	0	2.78474	1	2.7	0.02499	0.00425	0.02735	0.17509	0.01774	0.04685	95.97	207.0277	0.59	25879.99	150375.2
4	0.2	3.24209	0.9	1.48994	0.02404	0.00381	0.02868	0.17879	0.01685	0.04634	83.82	212.1484	0.55	8.86E+07	153397.8
4	0.4	3.99720	0.8	1.2	0.02037	0.00414	0.02095	0.20669	0.01786	0.06562	83.82	151.6078	0.55	95099.01	105101
4	0.6	3.85544	1	1.12128	0.02333	0.00299	0.02312	0.19731	0.01611	0.04746	52.91	231.8809	0.75	16152.41	136132.8
5	0.4	3.83032	0.4	3.6	0.02826	0.01559	0.03312	0.04802	0.03134	0.03869	0	1592258	0	100E+09	106152
5	0.4	4.28848	0.4	3.4	0.02174	0.01	0.02839	0.06338	0.03006	0.04302	2804	862E+07	160	8345139	106152
5	0.2	4.21790	0.2	3.3	0.01536	0.00341	0.02351	0.09669	0.03007	0.04316	0	3863951	0	194695	10935
5	0.1	4.47178	0.1	2.8325	0.02239	0.00199	0.02521	0.14703	0.02426	0.04505	4624	2930981	108	725E+07	137492
5	0.8	3.78294	0.5	3.46025	0.02367	0.00317	0.02437	0.18748	0.02118	0.04735	7743	1958661	0.88	961E+07	89416.16
5	0.6	3.43996	0.5	5.28075	0.02469	0.00289	0.02161	0.20516	0.01940	0.05136	9794	1771967	0.70	869E+07	1403624
5	0.4	3.24864	0.5	3.41057	0.02127	0.00372	0.02454	0.20480	0.01867	0.04869	1031	1890745	0.74	748E+07	1209404
5	0.2	3.6600	0.5	2.43302	0.02118	0.00316	0.02679	0.20094	0.01774	0.04718	1028	1987121	0.76	904E+07	6762866
5	0.1	3.66823	0.5	1.1	0.02364	0.00238	0.03020	0.20166	0.01647	0.04563	101	1028015	0.76	113E+08	2719243
5	0.2	3.60190	0.5	0.60143	0.02392	0.00260	0.02839	0.20043	0.01544	0.04509	7714	1310196	0.73	108E+08	1261142
5	0.4	4.21933	0.2	0.6	0.02300	0.00249	0.02825	0.21695	0.01552	0.05731	651	1331078	0.81	100E+09	8890916
5	0.6	3.80536	0.2	0.5	0.02404	0.00292	0.02127	0.21078	0.01532	0.03376	44	1574825	1.20		

The values in Table 12 represent solutions that are close to the charge control map and represent physically significant solutions of the FET's electrical structure. However, the values represented in Table 12 contain the influence of external layout parasitics which, in accordance with an important aspect of the invention, are subtracted using a model for the embedding parasitics to obtain the most accurate charge control mapping to the intrinsic device characteristic. In particular, an embedding model is applied to filter the extracted equivalent circuit model values and obtain values more representative of the intrinsic device. In particular, in the exemplary embodiment, a PiFET embedding parasitic model is used to subtract capacitive contributions due to interelectrode and off-mesa layout parasitic influences. This filter essentially subtracts known quantities formed from the parameters C_{gs} , C_{gd} and C_{ds} depending on the device layout involved. In this example, embedding of the inductive parameters is not necessary because these quantities are extrinsic and do not contribute to the charge control map of the intrinsic device.

As discussed above, the lens with filter is used to generate unique charge control maps. In particular, FIGS. 36-39 illustrates the bias dependent charge control maps for the parameters R_s , R_d , R_i , C_{gs} and C_{gd} as a function of bias. More particularly, FIG. 36 illustrates a charge control map of the charge and electric field distribution in the on-mesa source access region illustrated by the source resistance R_s as a function of bias. FIG. 37 illustrates a charge control map of the charge and electric field distribution in the on-mesa drain access region illustrated by the drain resistance R_d as a function of bias. FIG. 38 illustrates a charge control map for a non-quasistatic majority carrier transport illustrated by the intrinsic device charging resistance R_i as a function of gate bias for different drain bias points. FIG. 39 illustrates a charge control map for gate modulated charge and distribution under the gate shown with the gate capacitance C_{gs} and C_{gd} as a function of bias.

FILTER

As mentioned above, the S-parameter microscope 20 utilizes a filter to provide a clearer charge control map for modeling the internal electric charge/field of a semiconductor device. Although the filter is illustrated in connection with the PiFET with multiple gate fingers, as illustrated in FIGS. 40 and 41, the principles of the invention are applicable to other semiconductor devices.

As illustrated in FIG. 40, PiFETs are devices in which the gate fingers and the edge of the active region resemble the greek letter π , as illustrated. Such PiFET layouts facilitate construction of multi fingered large periphery device cells, for example, as illustrated in FIG 41. In accordance with an important aspect of the invention, the multi-finger semiconductor device is modeled as a combination of single finger device cells. Each single finger device cell is represented by a hierarchy of four models, which, in turn, are assembled together using models for interconnects to represent an arbitrary multi-fingered device cell, illustrated in FIG. 42. The four models are as follows: off mesa or boundary parasitic model; interelectrode parasitic model; on-mesa parasitic model and intrinsic model.

The off-mesa parasitic model is illustrated in FIG. 43. This model represents the parasitics that exist outside the active FET region for each gate finger. In this model, the fringing capacitance of each gate finger off the active device region as well as the off-mesa gate finger resistance is modeled.

The interelectrode parasitic model and corresponding equivalent circuit are illustrated in FIGS. 44-46. This model represents parasitics between the metal electrodes along each gate finger. The following fringing capacitance parasitics are modeled for the gate-to-source air bridge; drain-to-source air bridge; gate-to-source ohmic; gate-to-drain ohmic and source-to-drain ohmic as generally illustrated in FIG. 45.

The on-mesa parasitic model and corresponding equivalent circuit are illustrated in FIGS. 47 and 48. This model represents that parasitics around the active FET region along each gate finger including various capacitance fringing parasitics and resistive

parasitics. In particular, the gate-to-source side recess; gate-drain-side recess; gate-source access charge/doped cap; and gate-drain access charge/doped cap capacitance fringing parasitics are modeled. In addition, the gate metallization and ohmic contact resistive parasitics are modeled.

The intrinsic model and corresponding equivalent circuit are illustrated in FIGS. 49 and 50. The intrinsic model represents the physics that predominately determine the FET performance. In particular, the DC and current voltage response can be determined by physics based analytical equations for magnitude and location of intrinsic charge which are generally known in the art, for example, as disclosed in "Nonlinear Charge Control in AlGaAs/GaAs Modulation-Doped FETs," by Hughes et al, IEEE Trans. Electron Devices, Vol. ED-34, No. 8, August 1987. The small signal model performance is modeled by taking a derivative of the appropriate charge or current control equations to derive various terms such as R_I , R_J , R_{DS} , R_{GS} , R_{GD} , G_M , τ_{AU} , C_{GS} , C_{DS} and C_{GD} . Such control equations are generally known in the art and disclosed in detail in the Hughes et al reference mentioned above, hereby incorporated by reference. The noise performance may be modeled by current or voltage perturbation analysis "Noise Characteristics of Gallium Arsenide Field-Effect Transistors" by H. Statz, et al, IEEE-Trans. Electron Devices, vol. ED-21, No. 9, September 1974 and "Gate Noise in Field Effect Transistors at Moderately High Frequencies" by A. Van Der Ziel, Proc. IEEE, vol 51, March 1963 and "Noise Characteristics of Gallium Arsenide Field Effect Transistors," by H. Statz, IEEE Trans., Vol. ED-21, No. 9, September 1974.

An example of a parasitic model for use with the S-parameter microscopy discussed above is illustrated in FIGS. 51-58. Although a specific embodiment of a semiconductor device is illustrated and described, the principles of the present invention are applicable to various semiconductor devices. Referring to FIG. 51A, a Pi-FET is illustrated. As shown, the PiFET has four gate fingers. The four fingered Pi-FET is modeled in FIG. 51B. In particular, FIG 51B illustrates an equivalent circuit model for Pi-FET illustrated in FIG. 51A as implemented by a known CAD program, for example, LIBRA 6.1 as manufactured by Agilent Technologies. As shown, the equivalent circuit

models does not illustrate all of the equivalent circuit elements or network connections involved with implementing the parasitic embedding models, but rather demonstrates a finished product. FIG. 51B is displayed in symbol view in order demonstrate resemblance to FIG. 41. The actual technical information regarding the construction of the network and its equivalent circuit elements are normally provided in schematic view.

FIGS. 52-56 demonstrate the application of the parasitic model for use with the S-parameter microscopy. An important aspect of parasitic modeling of multi-gate fingered devices as single gate finger devices. As used herein, a single unit device cell refers to a device associated with a single gate finger. For example, a four fingered Pi-FET as illustrated in FIG. 51 is modeled as four unit device cells.

Initially, the four finger Pi-FET illustrated in FIG. 51, is modeled as a single finger unit device cell 100 with an intrinsic model 102, as shown in FIGS. 52 and 53. In particular, the Pi-FET intrinsic FET model 104 is substituted for the block 102 defining a first level of embedding. As shown in FIG. 53, the parameter values for the Pi-FET intrinsic model are added together with the parameter values for the single fingered unit device cell intrinsic model. The intrinsic device model 104 may be developed by S-parameter microscopy as discussed above. Next, as illustrated in FIG. 54, the interconnect layout parasitic elements are added to the equivalent model by simply adding the model terms to the value of the appropriate circuit element to form a single unit device cell defining a second level of embedding. Once the single unit device cell is formulated, this device is used to construct models for multi-fingered devices. In this case, a Pi-FET with four gate fingers is modeled as four single finger device unit cells as shown in FIG. 55. Subsequently, the off-mesa layout parasitic elements are connected to the multi-fingered layout, defining a third level of embedding as illustrated in FIG. 56. These off-mesa layout parasitic elements, generally identified with the reference numerals 108 and 110, are implemented as new circuit elements connected at key outer nodes of the equivalent circuit structure. Subsequently, a fourth level of embedding is implemented as generally illustrated in FIG. 57. In particular, an inductor model is connected to the sources of each of the various unit device cells to

represent the metallic bridge interconnection, as generally shown in FIG. 54. Lastly, as illustrated in FIG. 58, a fifth level of embedding is implemented in which the feed electrodes model 114 and 116 are modeled as lumped linear elements (i.e. capacitors inductors) as well as the distributive elements (i.e. microstrip lines and junctions) to form the gate feed and drain connections illustrated in FIG. 58. As shown, the distributive elements are distributed models for microstrip elements as implemented in LIBRA 6.1.

EXTRACTION METHOD FOR UNIQUE DETERMINATION OF FET EQUIVALENT CIRCUIT MODELS

The method for determining FET equivalent circuit parameters as discussed above is illustrated in FIGS. 58-64. This method is based on an equivalent circuit model, such as the common source FET equivalent circuit model illustrated in FIG. 28. Referring to FIG. 58, a model is initially generated in step 122. The model illustrated in FIG. 28 is used as a small signal model for the FET. In accordance with an important aspect of the algorithm, the equivalent circuit parameters are based upon measured FET S-parameters. Measurement of S-parameters of semiconductor devices is well known in the art. FIG. 62A is a Smith chart illustrating exemplary measured S-parameters S11, S12 and S22 for frequencies between 0.05 to 40 GHz. FIG. 62B represents a magnitude angle chart for the measured S-parameter S21 from frequencies from 0.05 to 40 GHz. After the S-parameters are measured, as set forth in step 124 (FIG. 59), it is ascertained whether the measurements are suitable in step 126. This is either done by manually inspecting the test result for anomalies, or by algorithms to validate the test set. If the measurements are suitable, the S-parameter measurements are stored in step 128.

A space of trial starting feedback impedance point values, for example, as illustrated in Table 13 is chosen. Then, a direct model attraction algorithm, known as the Minasian algorithm, is used to generate preliminary values for the equivalent circuit model parameters, for each value of starting feedback impedance. Such extraction algorithms are well known in the art, for example, as disclosed "Broadband

Determination of the FET Small Equivalent Small Signal Circuit” by M. Berroth, et al., IEEE - MTT, Vol. 38, No. 7, July 1990. Model parameter values are determined for each of the starting impedance point values illustrated in Table 14. In particular, referring to FIG. 59A, each impedance point in Table 12 is processed by the blocks 130, 132, etc. to develop model parameter values for each of the impedance point in order to develop an error metric, which, in turn, is used to develop a unique small signal device model, as will be discussed below. The processing in each of the blocks 130, 132 is similar. Thus, only a single block 130 will be discussed for an exemplary impedance point illustrated in Table 13. In this example, the impedance point 17 which correlates to a source resistance R_s ohm of 1.7Ω and a source inductance L_s of 0.0045pH is used.

TABLE 13
Trial Starting Feedback, Impedance Space Point Values

Impedance Point	Resistance (R_s)	Inductance (L_s)
1	0.1Ω	0.0045pH
2	0.2Ω	0.0045pH
3	0.3Ω	0.0045pH
4	0.4Ω	0.0045pH
5	0.5Ω	0.0045pH
6	0.6Ω	0.0045pH
7	0.7Ω	0.0045pH
8	0.8Ω	0.0045pH
9	0.9Ω	0.0045pH
10	1.0Ω	0.0045pH
11	1.1Ω	0.0045pH
12	1.2Ω	0.0045pH
13	1.3Ω	0.0045pH
14	1.4Ω	0.0045pH
15	1.5Ω	0.0045pH
16	1.6Ω	0.0045pH
17	1.7Ω	0.0045pH
18	1.8Ω	0.0045pH
19	1.9Ω	0.0045pH
20	2.0Ω	0.0045pH

21	2.1 Ω	0.0045 pH
22	2.2 Ω	0.0045 pH
23	2.3 Ω	0.0045 pH
24	2.4 Ω	0.0045 pH
25	2.5 Ω	0.0045 pH
26	2.6 Ω	0.0045 pH
27	2.7 Ω	0.0045 pH
28	2.8 Ω	0.0045 pH
29	2.9 Ω	0.0045 pH
30	3.0 Ω	0.0045 pH

For the selected value, $R_s = 1.7$ ohms, initial intrinsic equivalent circuit parameters and initial parasitic equivalent circuit parameter are determined, for example, by the Minasian algorithm discussed above and illustrated in Tables 14 and 15 as set forth in steps 134 and 136. In step 138 the simulated circuit parameters are compared with the measured S-parameters, for example, as illustrated in FIGS. 62. Each of the processing blocks 130 and 132 etc. goes through a fixed number of complete cycles, in this case six complete cycles. As such, the system determines in step 140 whether the six cycles are complete.

TABLE 14
Initial "Intrinsic" Equivalent Circuit Parameters

Intrinsic Equivalent Circuit Parameter	Initial Solution
Cgs	0.23595 pF
Rgs	91826 Ω
Cgd	0.0177 pF
Rgd	100000 Ω
Cds	0.04045 pF
Rds	142.66 Ω
Gm	142.1025 mS
Tau	0.1 pS

TABLE 15
Initial "Parasitic" Equivalent Circuit Parameters

Intrinsic Equivalent Circuit Parameter	Initial Solution
Rg	3.0 Ω
Lg	0.014 nH
Rs	1.7 Ω
Ls	0.0045 nH
Rd	2.5 Ω
Ld	0.024 nH

Each cycle of the processing block 130 consists of a direct extraction followed by an optimization with a fixed number of optimization iterations, for example 60. By fixing the number of extraction-optimization cycles along with the number of optimization iterations, a fixed "distance" or calculation time which the model solution must be derived is defined. As such, the algorithm implements a convergence speed requirement of the global error metric by setting up an environment where each trial model solution competes against each other by achieving the lowest fitting error over a fixed calculation time thus causing a "race" criteria to be implemented, where "convergence speed" to be implicitly calculated for each processing block 130, 132 etc.

After the system determines whether the racing is done in step 140, the system proceeds to block 142 and optimizes model parameters. Various commercial software programs are available. For example, a commercially available, LIBRA 3.5 software as manufactured by HP-eesof may be used both for circuit simulation as well as optimizing functions. The optimization is performed in accordance with the restrictions set forth in Table 16 with the addition of fixing the feedback resistance R_f to a fixed value.

TABLE 16
Environment Used for Competitive Solution Strategy, as Implemented in this Example

Implementation Parameter	
Circuit Simulator and Optimizer	Libra 3.5
Optimization Algorithm	Gradient
Optimization Error Metric	Mag and angle of S11, S21, S12, and S22 from 4 to 40 GHz
Number of Iterations	60
Number of Extraction/Optimization Cycles	6

By fixing the value for R_s , this segment of the algorithm confined to creating a trial model solution for only the trial feedback impedance point with which it started. Table 17 illustrates the optimized intrinsic equivalent parameter values using commercially available software, such as LIBRA 3.5. These values along with the optimized parasitic values, illustrated in Table 18, form the first optimized model solution for the first extraction-optimization cycle (i.e. one of six). The optimized model parameters are then fed back to the function block 134 and 136 (FIG. 63A and 63B) used for a new initial model solution. These values are compared with the measured S-parameter value as illustrated in FIG. 63. The system repeats this cycle for six cycles in a similar fashion as discussed above. After the six extraction-optimization cycle, the final trial model solution for the trial impedance point 17 is complete along with its final fitting error to the measured data to form the new error metric 144. In accordance with an important aspect, the extraction-optimization algorithm makes the final optimization fitting error for each point implicitly carry information about both the measured to model fitting error and the speed of convergence. It does so by the fixed optimization time constraint which sets up a competitive race between the various trial model solutions.

TABLE 17
Optimized "Intrinsic" Equivalent Circuit Parameters

Intrinsic Equivalent Circuit Parameter	Initial Solution
Cgs	0.227785 pF
Rgs	65247 Ω
Cgd	0.017016 pF
Rgd	130820 Ω
Cds	0.047521 pF
Rds	160.18 Ω
Gm	135.74 mS
Tau	0.446 pS

TABLE 18
Optimized "Parasitic" Equivalent Circuit Parameters

Intrinsic Equivalent Circuit Parameter	Initial Solution
Rg	4.715 Ω
Lg	0.02903 nH
Rs*	1.7 Ω
Ls	0.002102 nH
Rd	3.2893 Ω
Ld	0.0317 nH

The implementation of the extraction optimization cycles makes the best and fastest solving solution appear as a global minima for the final fitting error in step 146 of all of the trial impedance points as generally shown in FIGS. 60 and 61. More specifically, referring to FIG. 60 the global minima solution using the new error metric is found around $R_s=1.7$ ohms. Tables 19 and 20 list the final model equivalent circuit parameters for this global solution, including the intrinsic and parasitic parameter as set forth in step 148 (FIG. 59).

TABLE 19
Global Solution for "Intrinsic" Equivalent Circuit Parameters

Intrinsic Equivalent Circuit Parameter	Initial Solution
Cgs	0.227745 pF
Rgs	64242 Ω
Cgd	0.017019 pF
Rgd	133450 Ω
Cds	0.047544 pF
Rds	160.1791 Ω
Gm	135.7568 mS
Tau	0.443867 pS

TABLE 20
Global Solution "Parasitic" Equivalent Circuit Parameters

Extrinsic Equivalent Circuit Parameter	Initial Solution
Rg	4.711895 Ω
Lg	0.029314 nH
Rs	1.7 Ω
Ls	0.002104 nH
Rd	3.309899 Ω
Ld	0.031671 nH

In order to test the accuracy of the solution, the final model for solutions are compared with the measured S-parameter values as shown in FIG. 64. As shown, there is good correlation between the simulated model values and the measured S-parameters values thus verifying that the simulated model values represent a relatively accurate and unique small signal device model.

Obviously, many modifications and variations of the present invention are possible in light of the above teachings. Thus, it is to be understood that, within the

scope of the appended claims, the invention may be practiced otherwise than as specifically described above.

What is claimed and desired to be covered by a Letters Patent is as follows:

I CLAIM:

1. A method for modeling semiconductor comprising the steps of:
 - (a) developing a semi-physical model;
 - (b) developing a data-fitting model; and
 - (c) combining said semi-physical and data-fitting model to form a hybrid model.
2. The method as recited in claim 1, wherein step (c) includes the following steps:
 - (d) using the semi-physical model to generate current-voltage (I-V) and capacitance-voltage (C-V) data for the data fitting model;
 - (e) deriving model parameters for the data-fitting model such that it fits the semi-physically modeled characteristics.
3. The method as recited in claim 2, wherein step (c) further includes step (f): implementing the data-fitting device model in a large signal microwave circuit computer aided drafting (CAD) tool.
4. The method as recited in claim 3, further including step (g): repeating steps (d)-(f) for arbitrary physical changes to the semi-physical device.
5. The method as recited in claim 1, wherein step (a) includes the step (h): (h) determining the relationships between the conduction band offsets, electric permittivity and material composition of the materials contained in the epi-stack.
6. The method as recited in claim (5), wherein step (h) is performed analytically.
7. The method as recited in claim (5) wherein step (h) is performed by fitting simulated data from physical simulators.

8. The method as recited in claim 5, wherein step (a) also includes step (i): determining the basic electron transport characteristics in the materials in the epi-stack.

9. The method as recited in claim 8, wherein step (a) also includes step (j): determining the undepleted linear channel mobility.

10. The method as recited in claim 9, wherein step (j) is determined through material characterization.

11. The method as recited in claim 9, wherein step (j) is determined by physical simulation.

12. The method as recited in claim 9, wherein step (a) also includes step (k): determining the Schottky barrier expressions.

13. The method as recited in claim 1, wherein step (a) includes semi-physical modeling one or more of the following characteristics: fundamental-charge control physics for sheet charge in the active channel as controlled by the gate terminal voltage; average centroid position of the sheet charge within the active channel width; position of charge partitioning boundaries as a function of gate, drain and source terminal voltages; bias dependence of linear channel mobility in the surface depleted regions; bias dependent of the velocity saturating electric field; saturated electron velocity; electrical conductance of the linear conductance region of the channel under the gate; electrical conductance within the source and drain access regions.

14. The method as recited in claim 13, wherein step (c) includes the (e) adjusting the empirical terms of the semi-physical model to fit I-V characteristics against measured values.

15. The method as recited in claim 14, wherein the empirical terms of the semi-physical model are interactively adjusted to simultaneously fit the measured I-V and C-V characteristics.

16. The method as recited in claim 15, wherein the empirical terms are fired for future use.

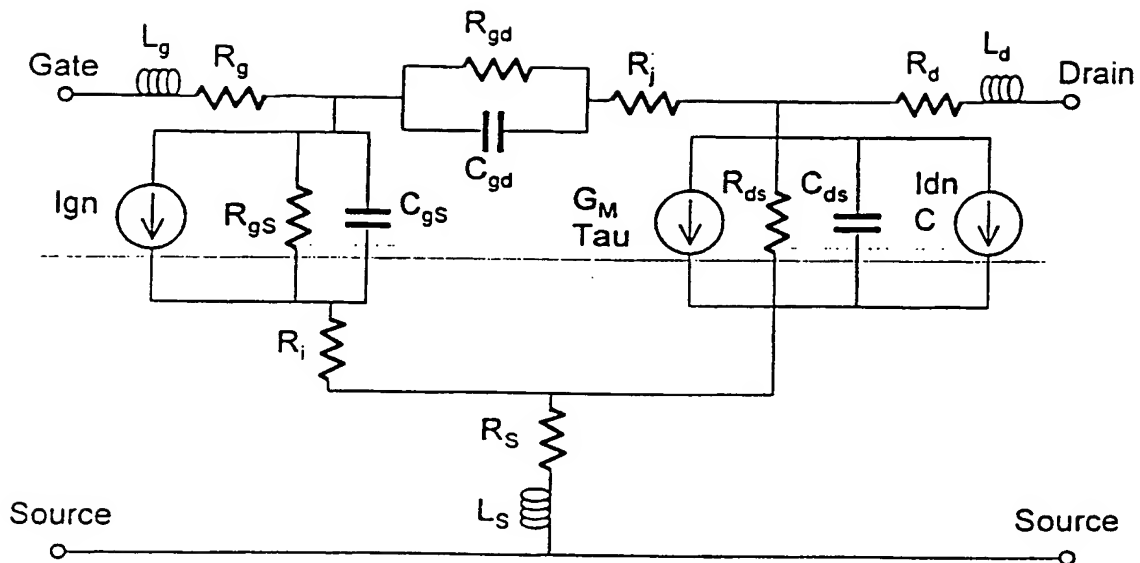


Figure 1

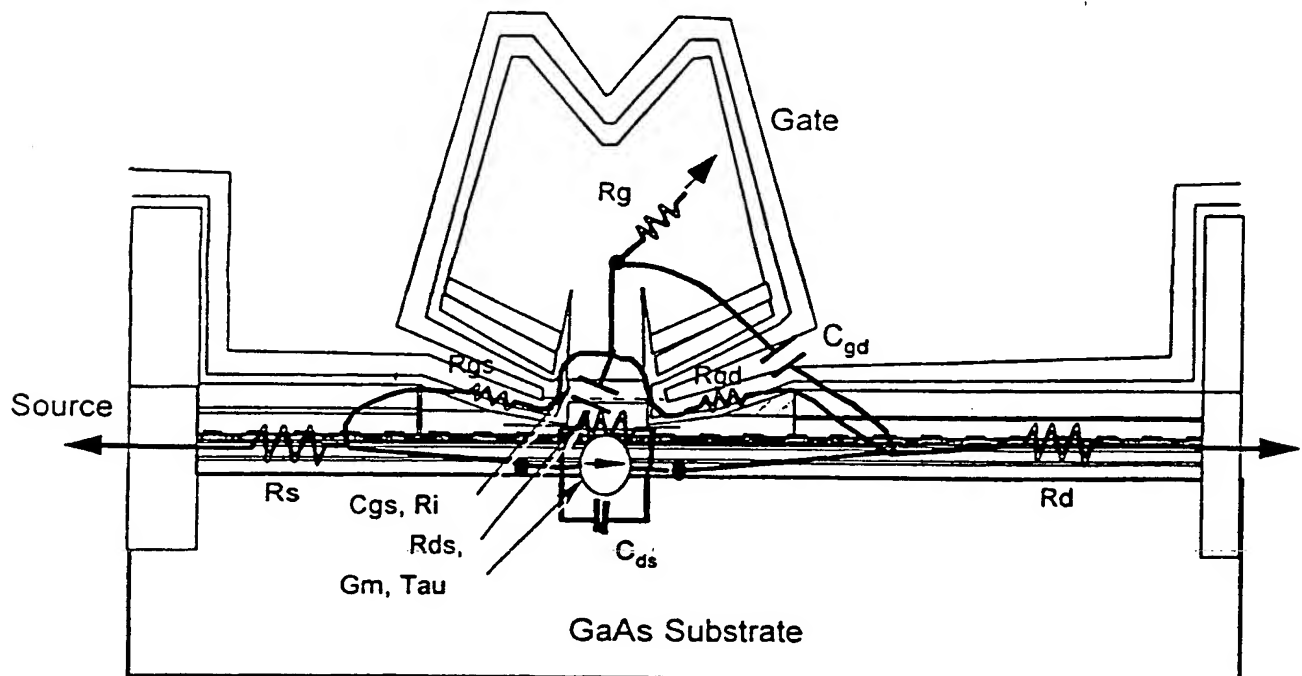


Figure 2

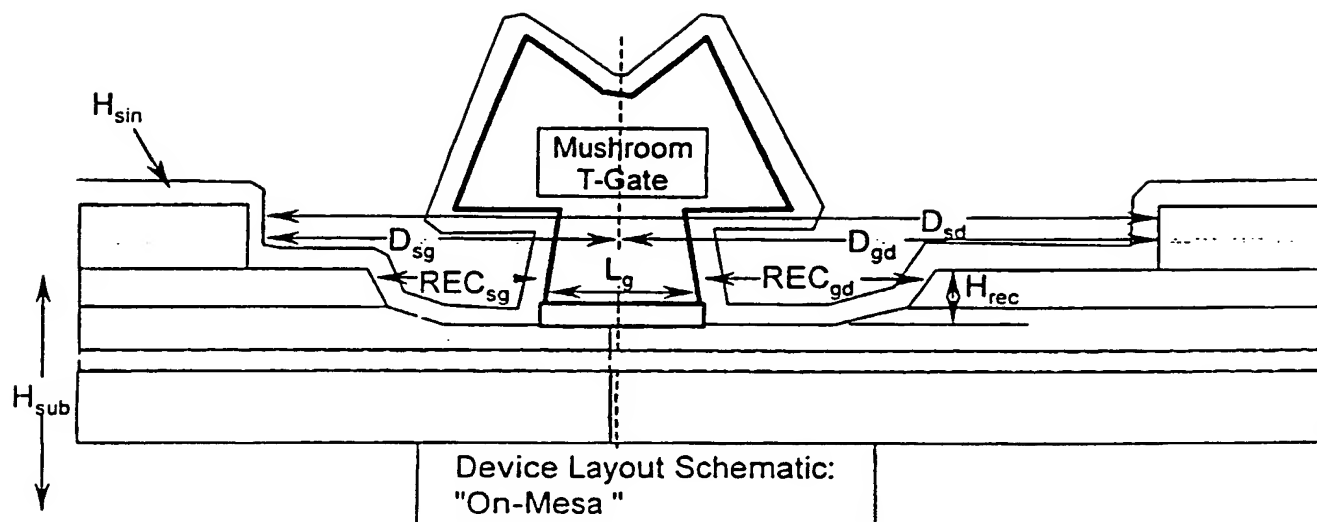


Figure 3

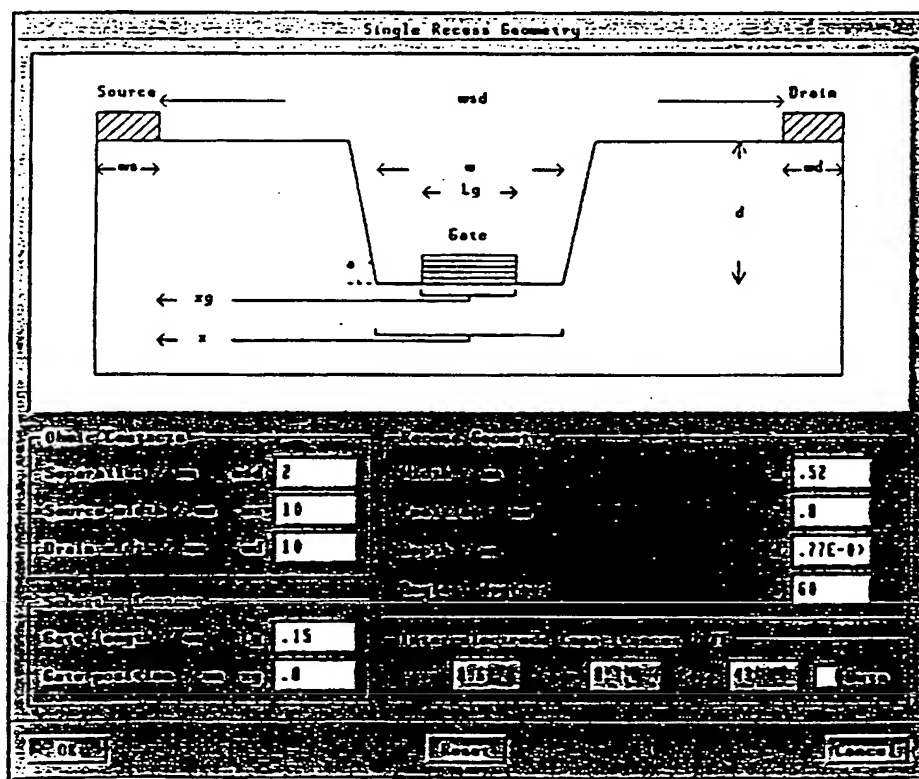


Figure 4

HEMT Active Layer

Layer 10	GaAs	Nd	6.00E18	500Å	
Layer 9	AlGaAs	25%	Na	1.00E14	480Å
Layer 8	AlGaAs	25%	Nd	2.00E19	20Å
Layer 7	AlGaAs	25%	Na	1.00E14	20Å
Layer 6	InGaAs	22%	Na	1.00E14	140Å
Layer 5	AlGaAs	25%	Na	1.00E14	30Å
Layer 4	AlGaAs	25%	Nd	6.00E18	16Å
Layer 3	AlGaAs	25%	Na	1.00E14	300Å
Layer 2	AlGaAs	16.5%	Na	1.00E14	150Å
Layer 1	AlGaAs	8.5%	Na	1.00E14	150Å
Buffer	GaAs			3000Å	
Substrate	S.I. GaAs Substrate				

Edit Layers

Figure 5

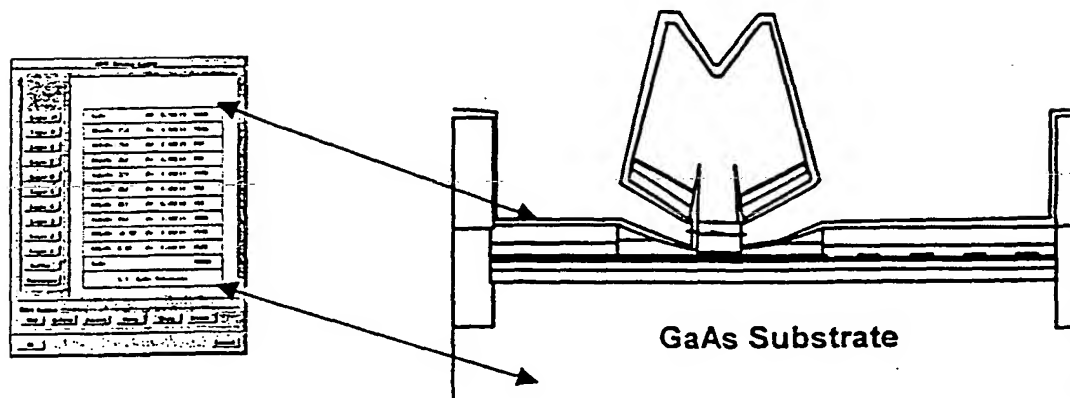


Figure 6

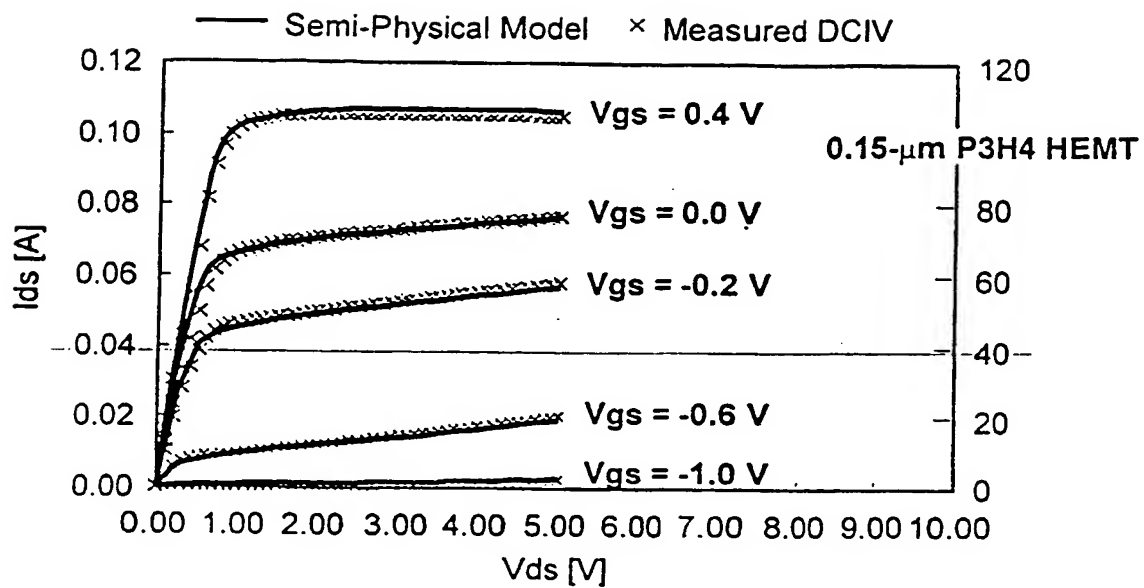


Figure 7

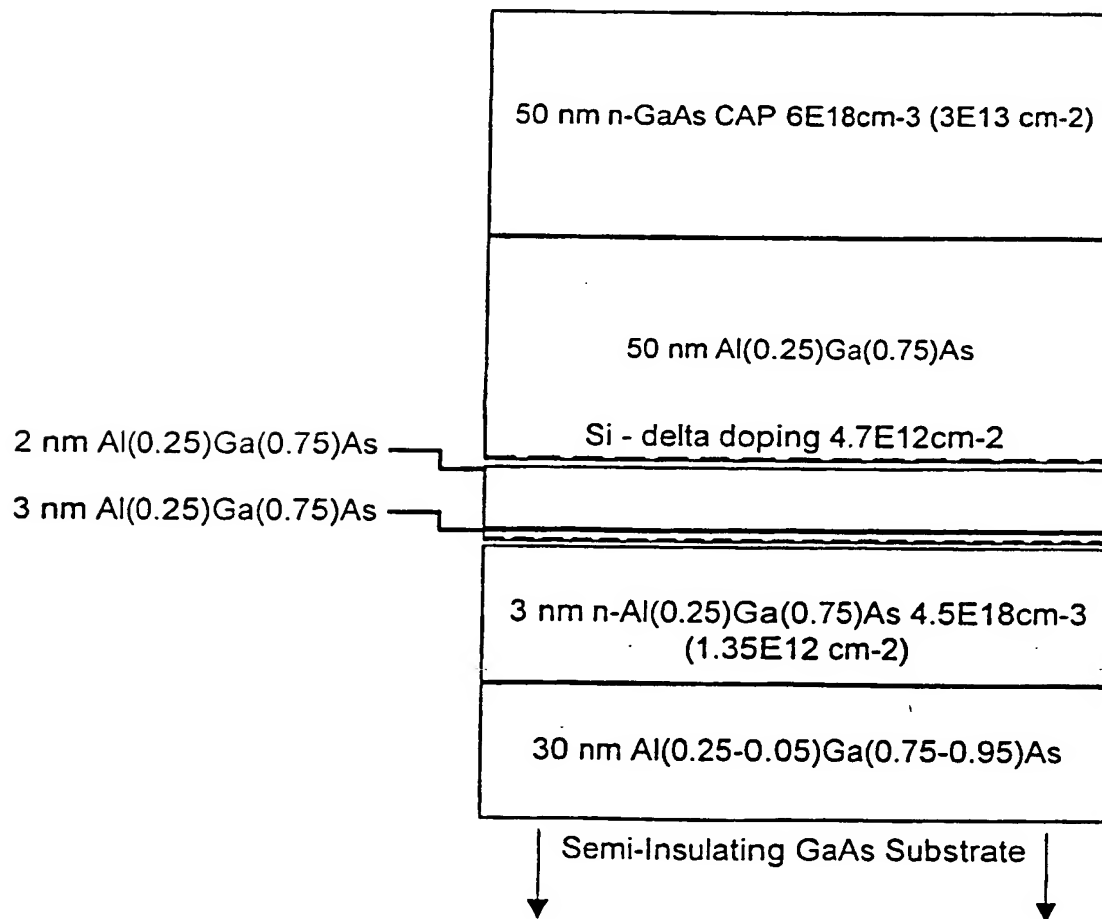


Figure 8

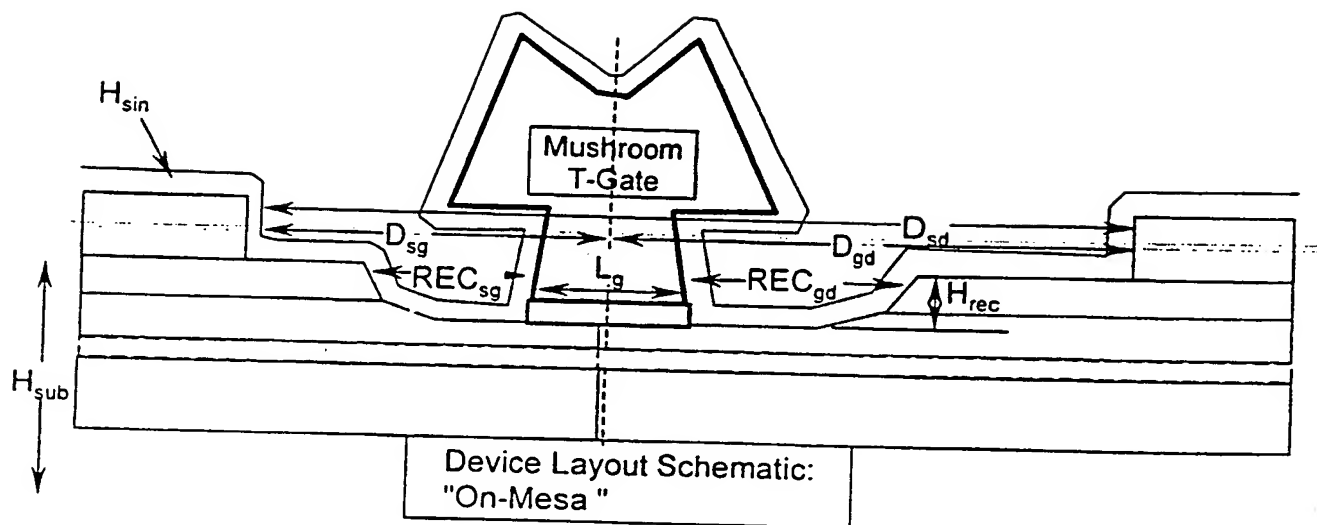


Figure 9

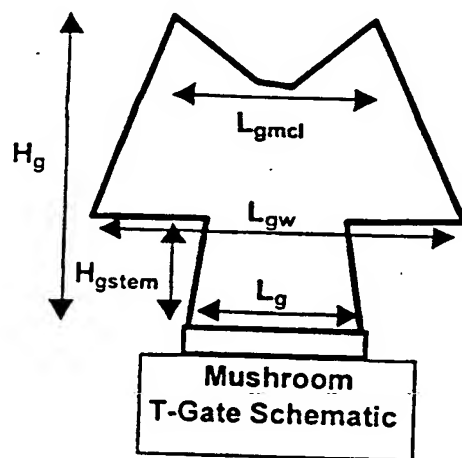


Figure 10


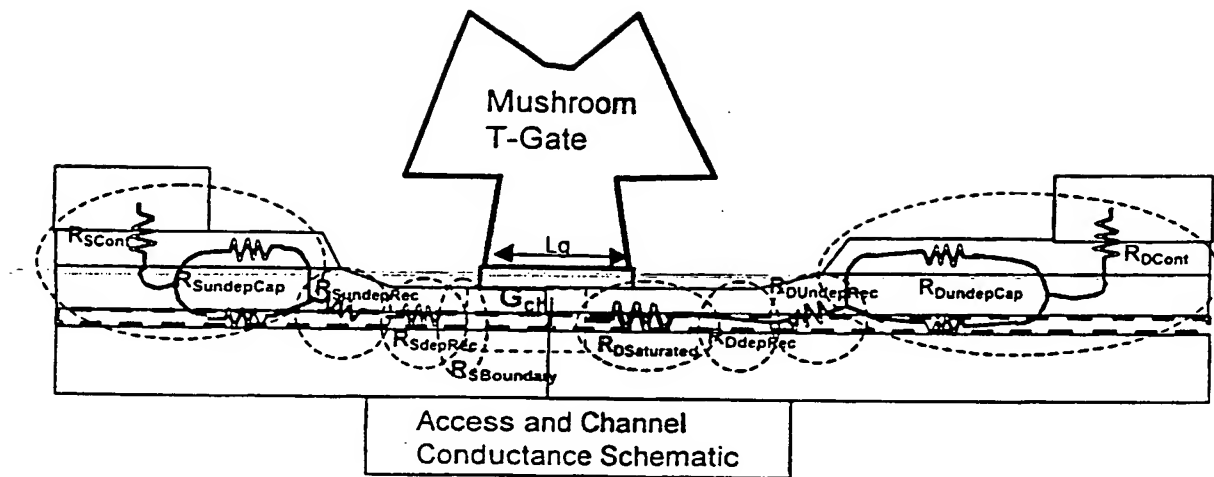


Figure 11


measure SMAT1 meas_4200AB_2vidpk-GTPA4 S[1,1]
 measure SMAT1 meas_4200AB_2vidpk-GTPA4 S[1,2]
 measure SMAT1 meas_4200AB_2vidpk-GTPA4 S[2,2]
 Simulated SMAT1 cp100-semiphys S[1,1]
 Simulated SMAT1 cp100-semiphys S[1,2]
 Simulated SMAT1 cp100-semiphys S[2,2]

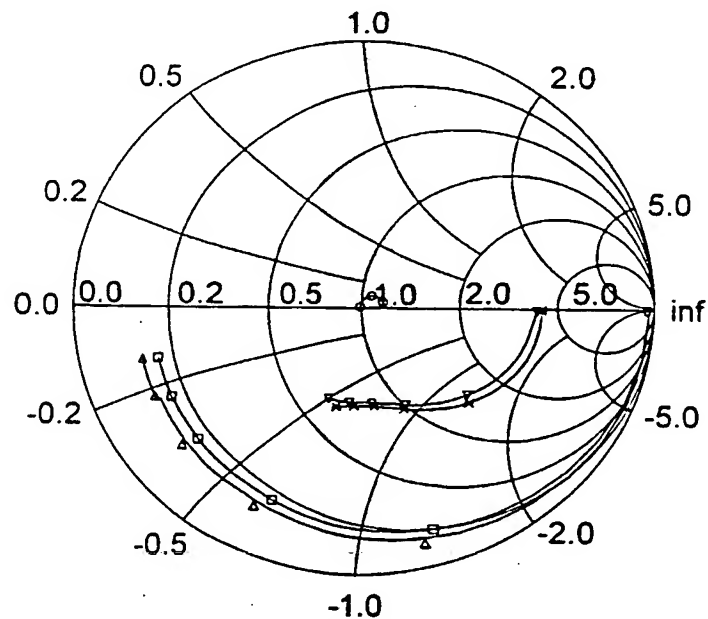

Frequency 0.05 to 40.05 GHz


Measured vs Modeled S-parameters
 Simulated Equivalent Circuit Element Values
 via Semi-Physical HEMT Model

Figure 12

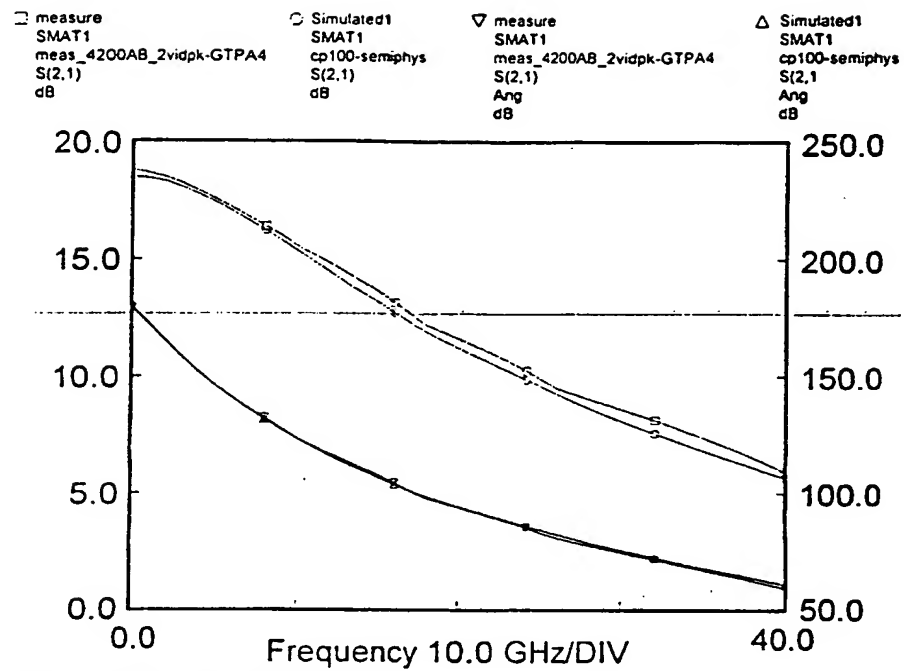

Measured vs Modeled S12
 Simulated Equivalent Circuit Element Values via
 Semi-Physical HEMT Model

Figure 13

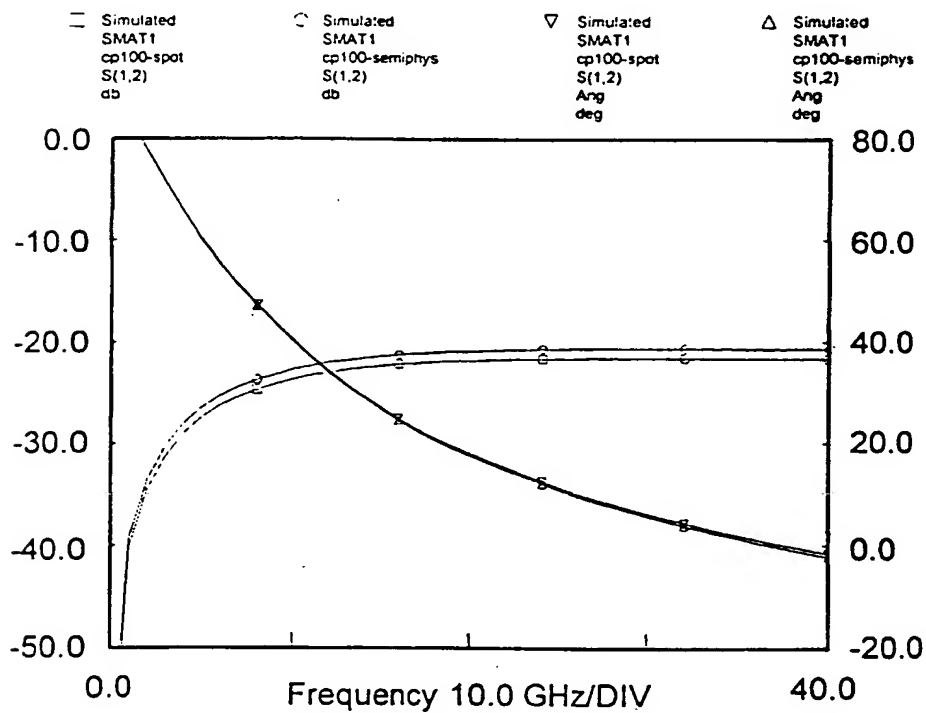

Measured vs Modeled S12
 Simulated Equivalent Circuit Element Values via
 Semi-Physical HEMT Model

Figure 14

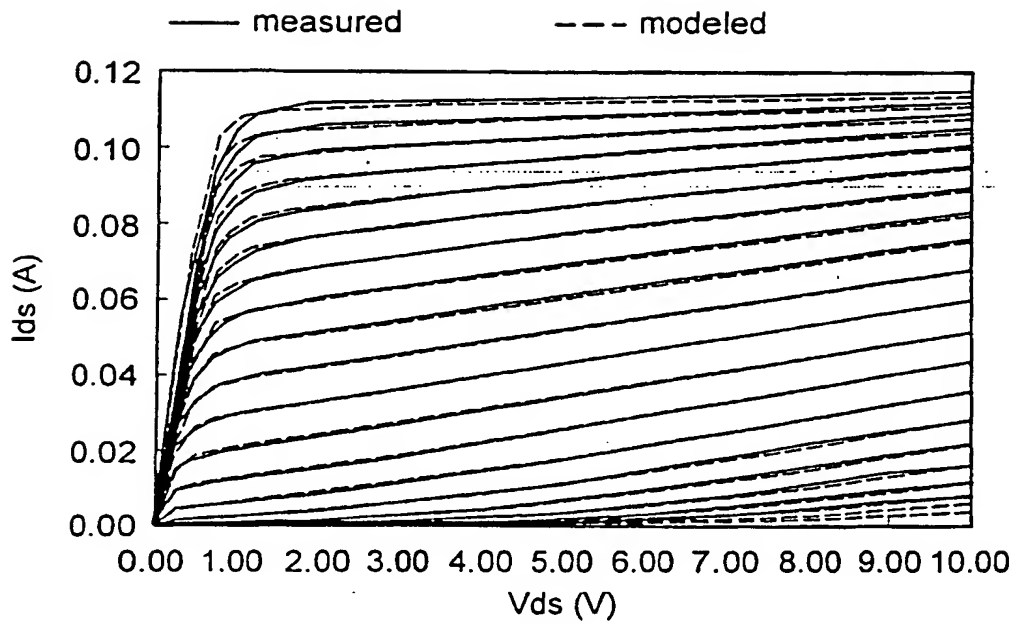


Figure 15

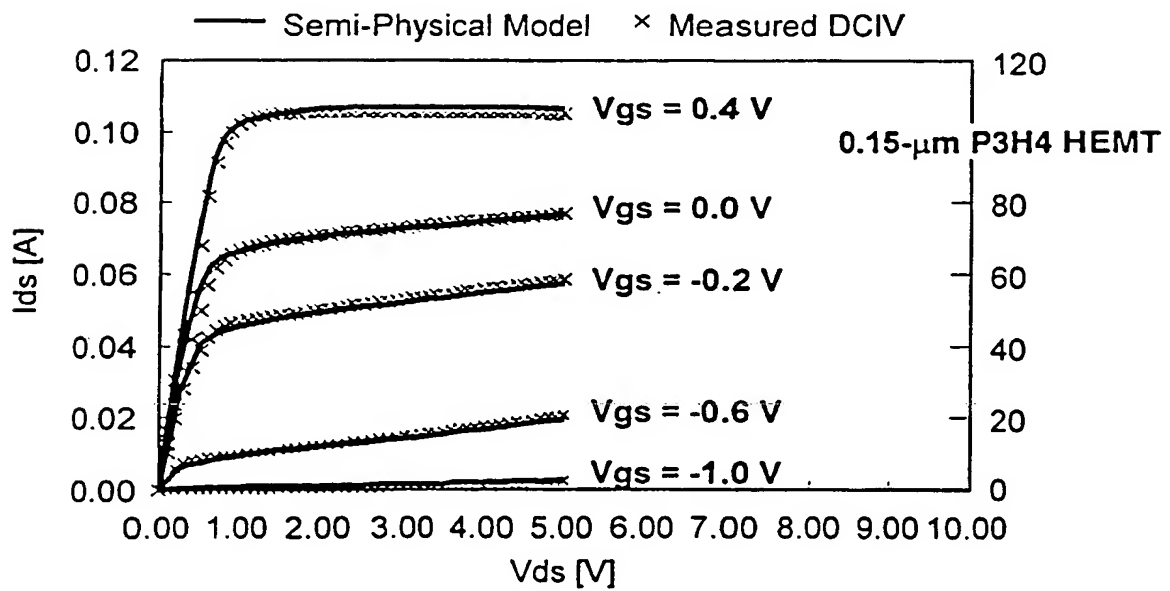


Figure 16

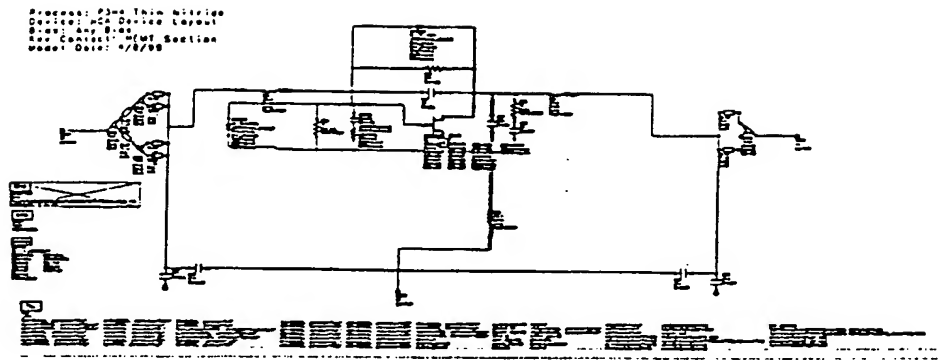


Figure 17

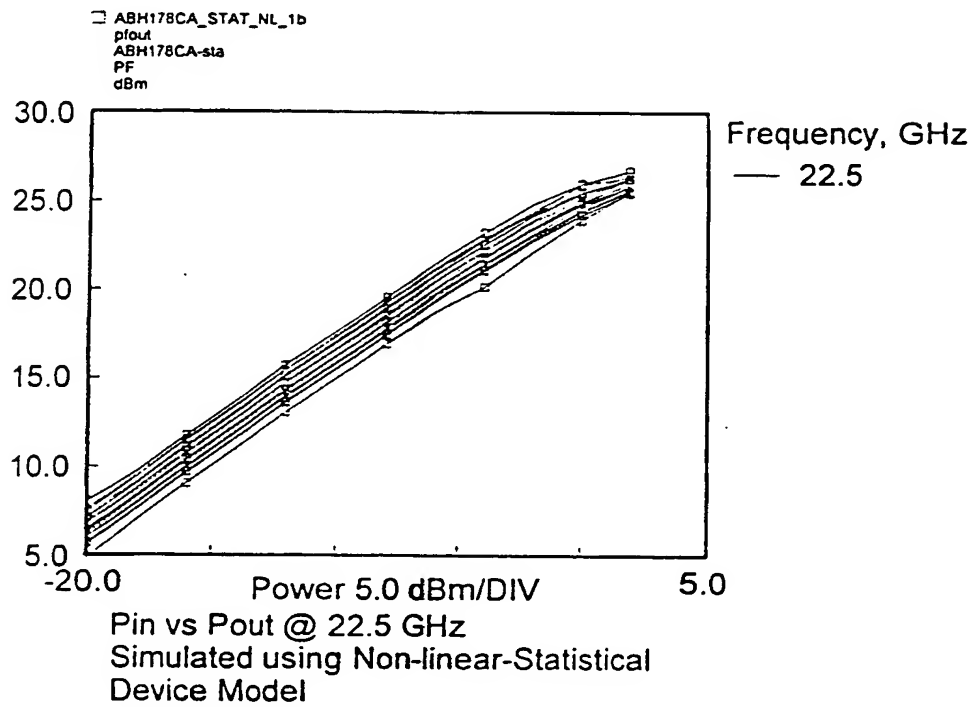


Figure 18A

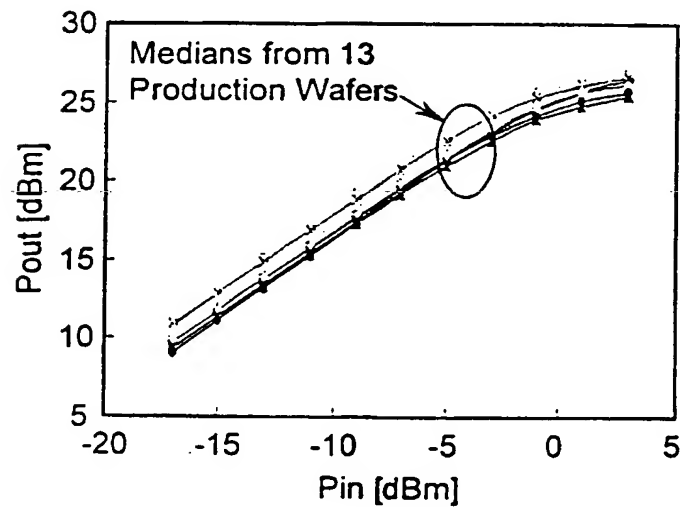


Figure 18B

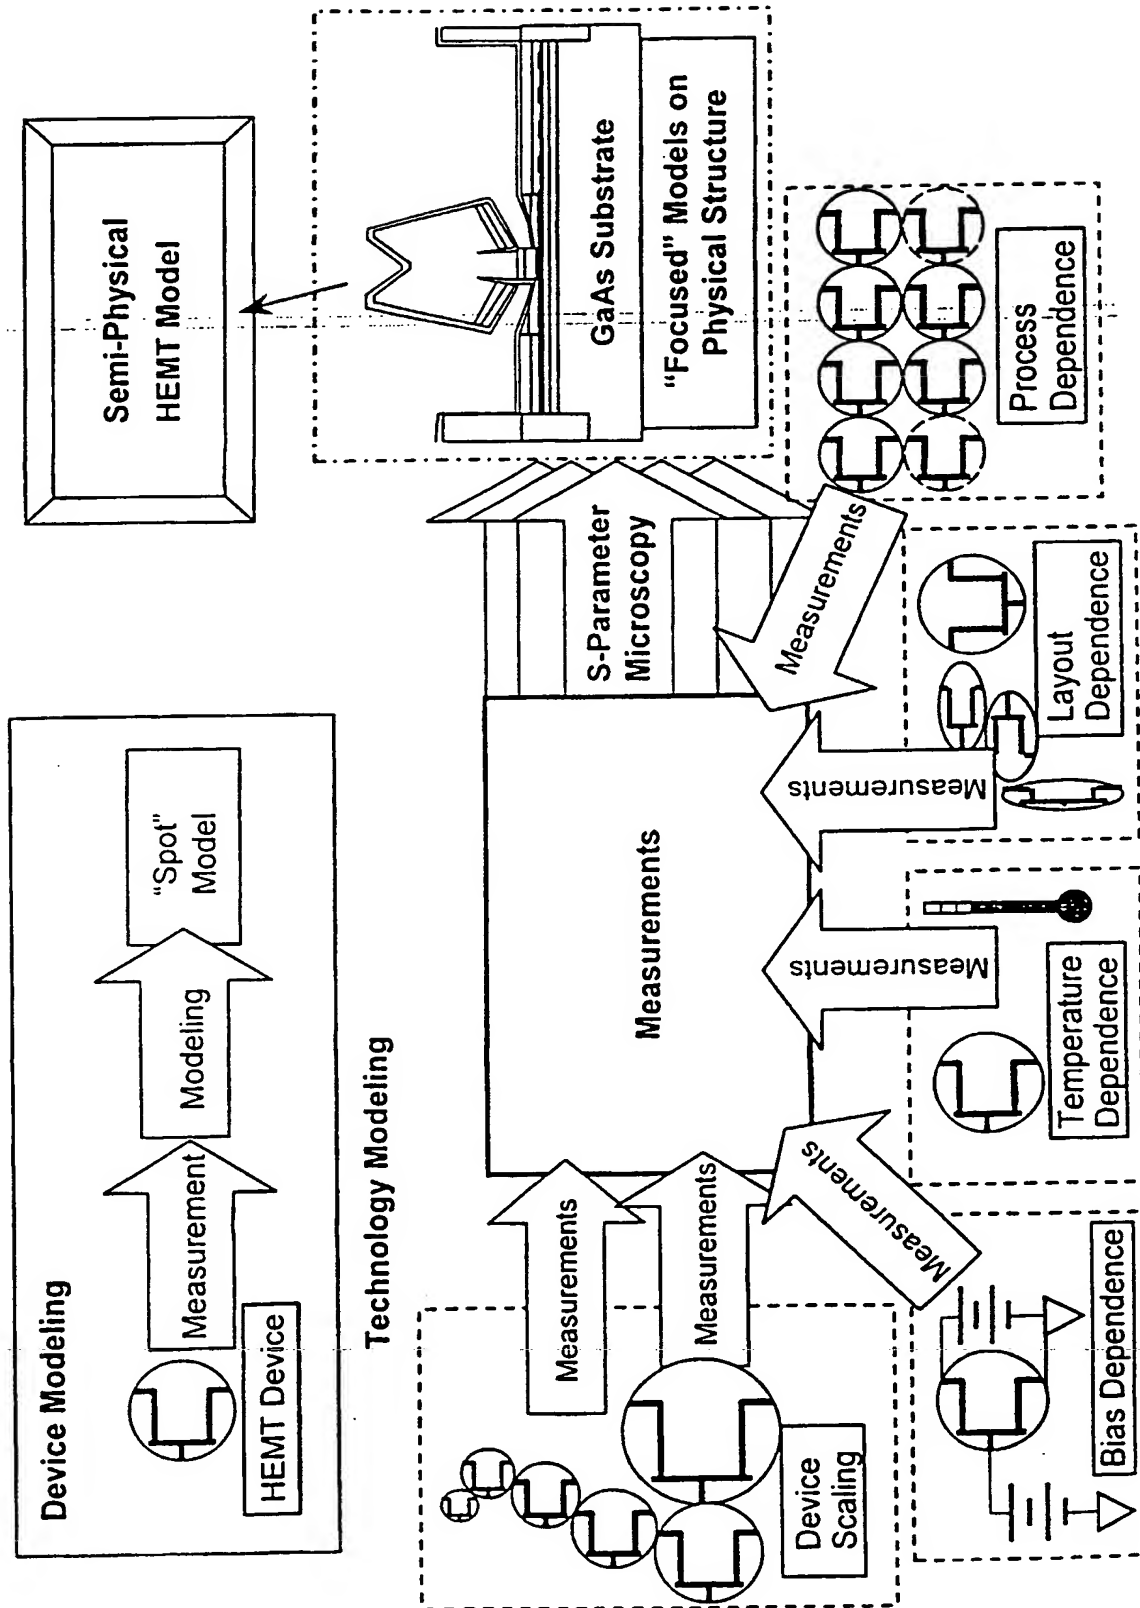


Figure 19

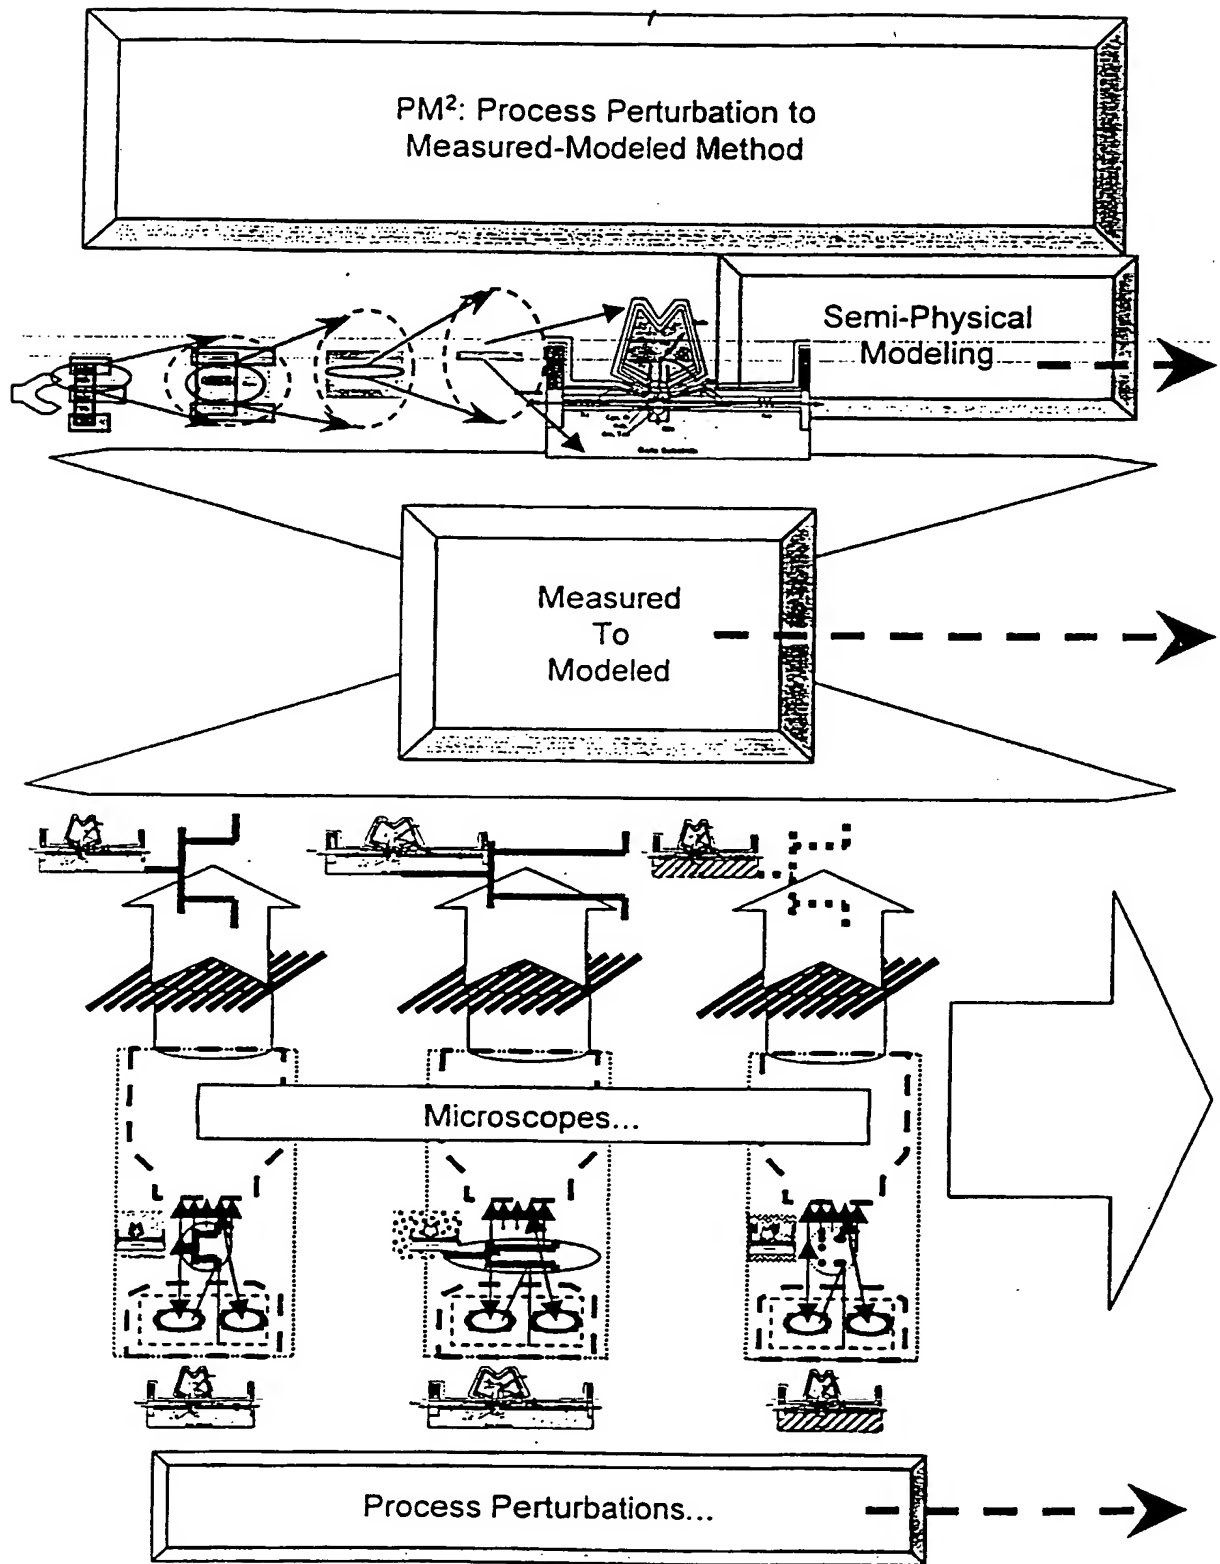


Figure 20

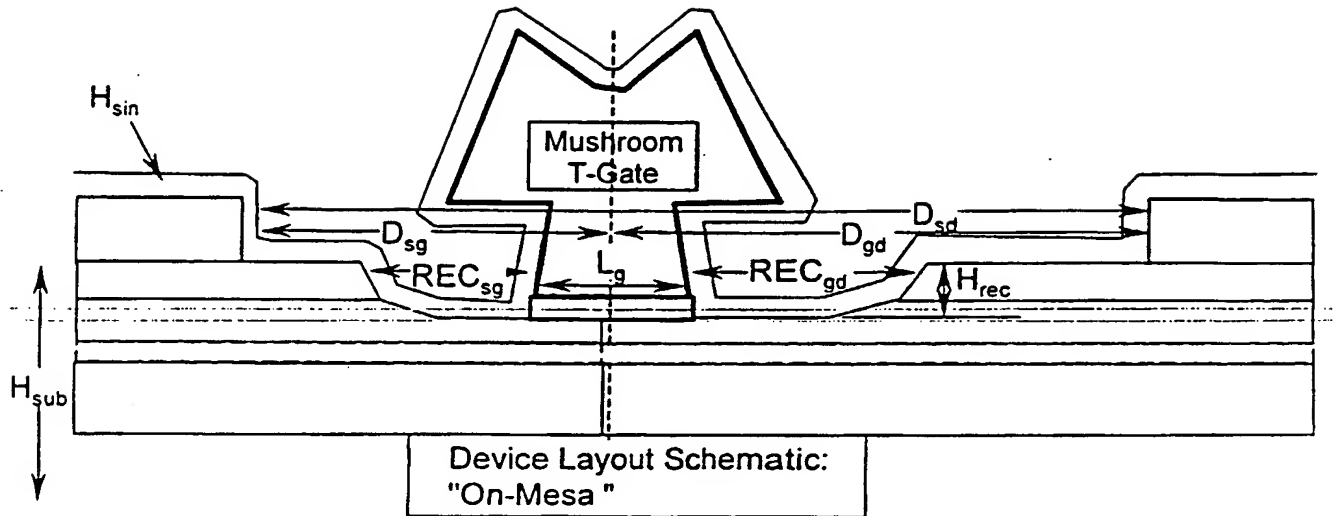


Figure 21A

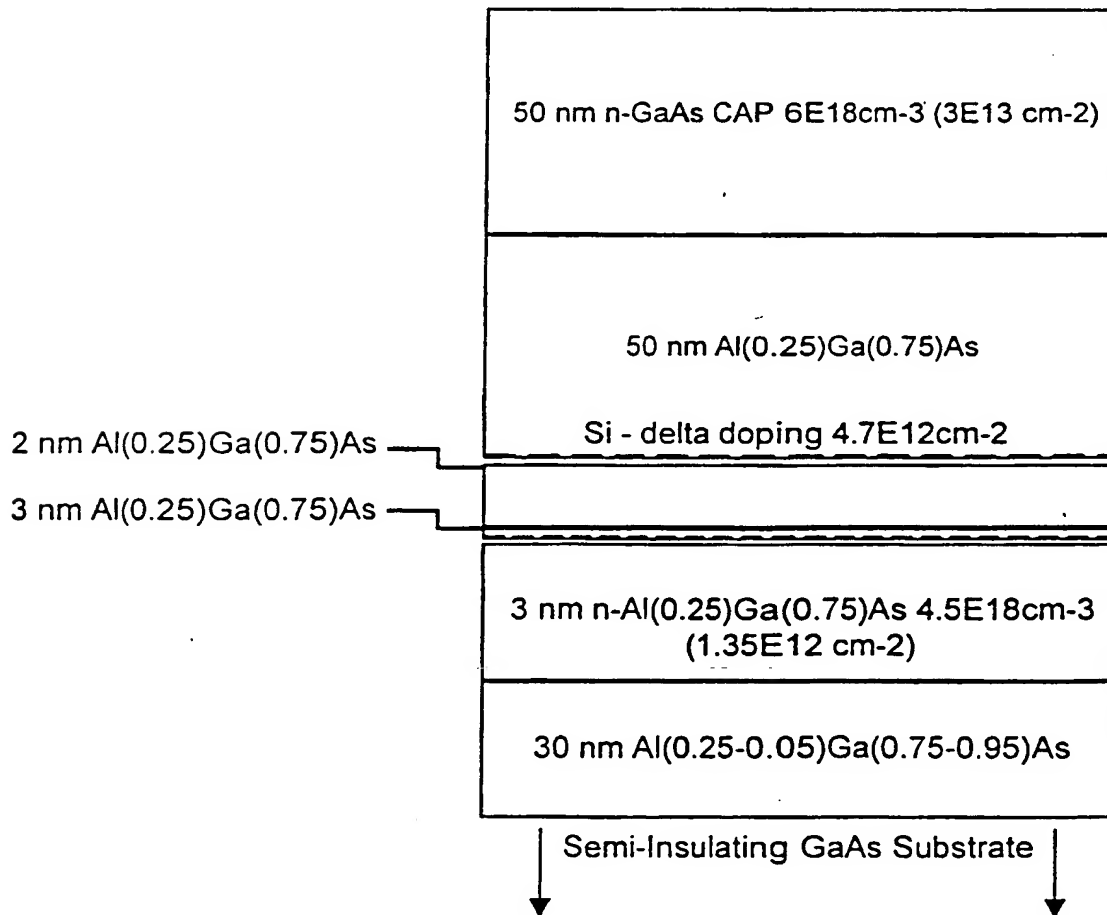


Figure 21B

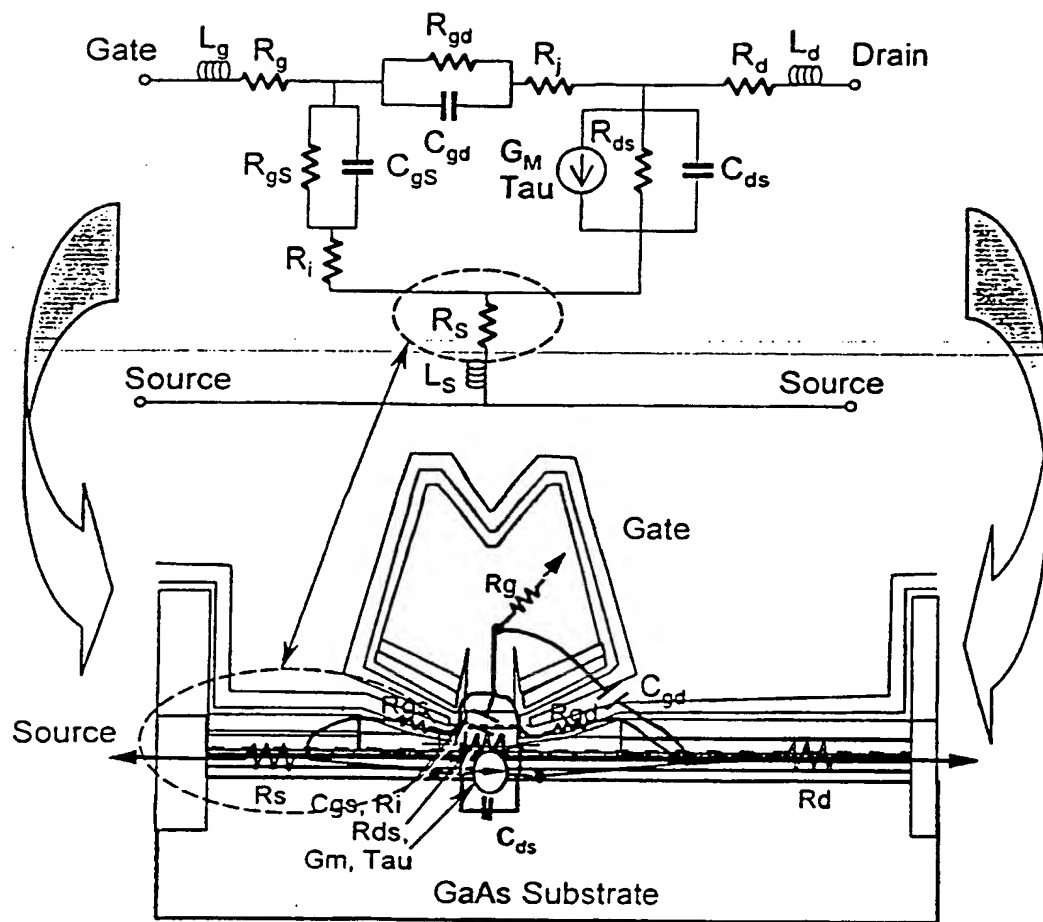


Figure 22

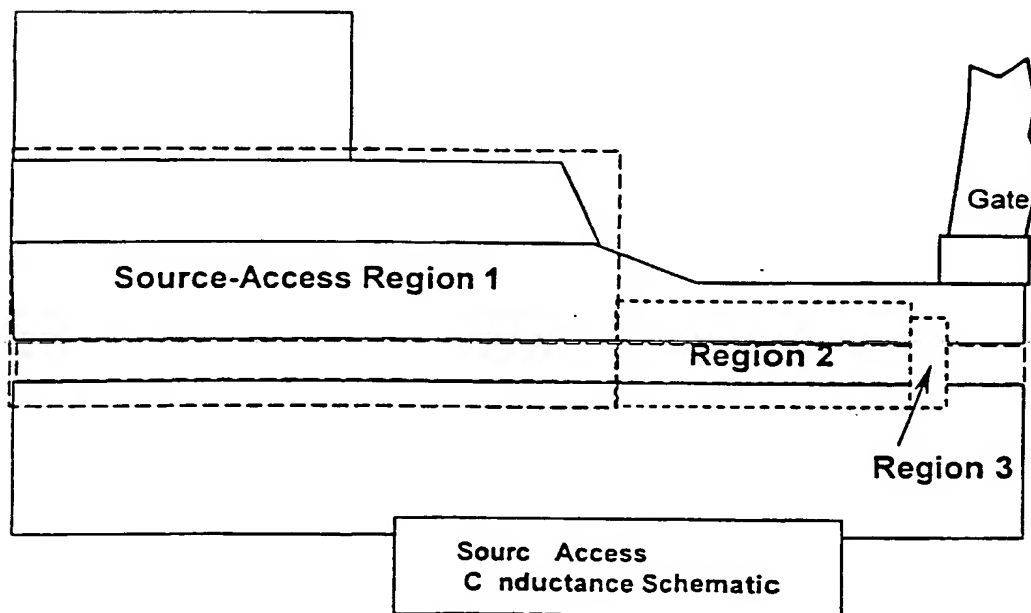


Figure 23

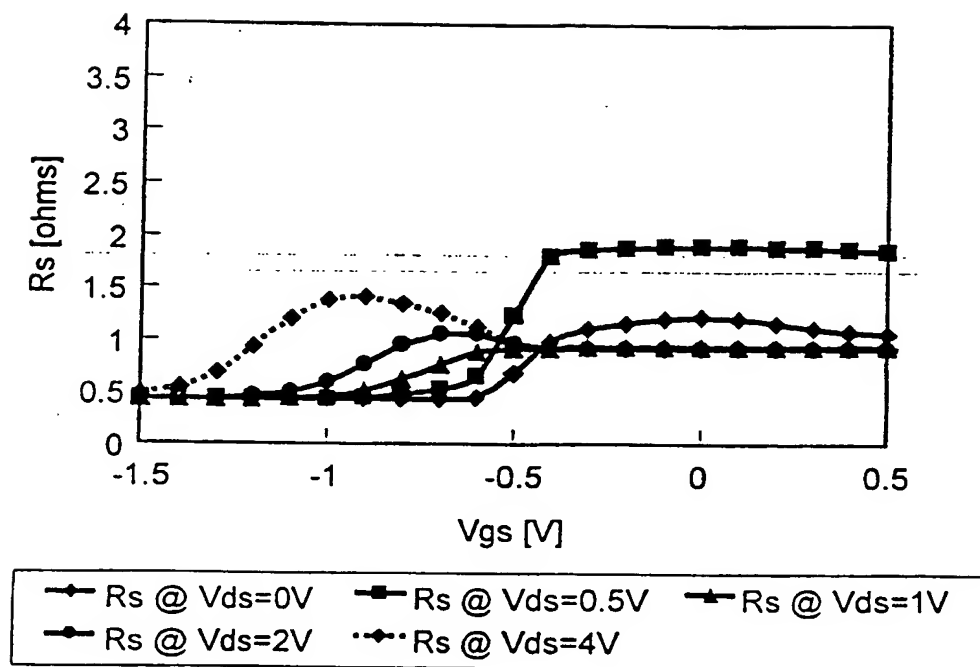


Figure 24A


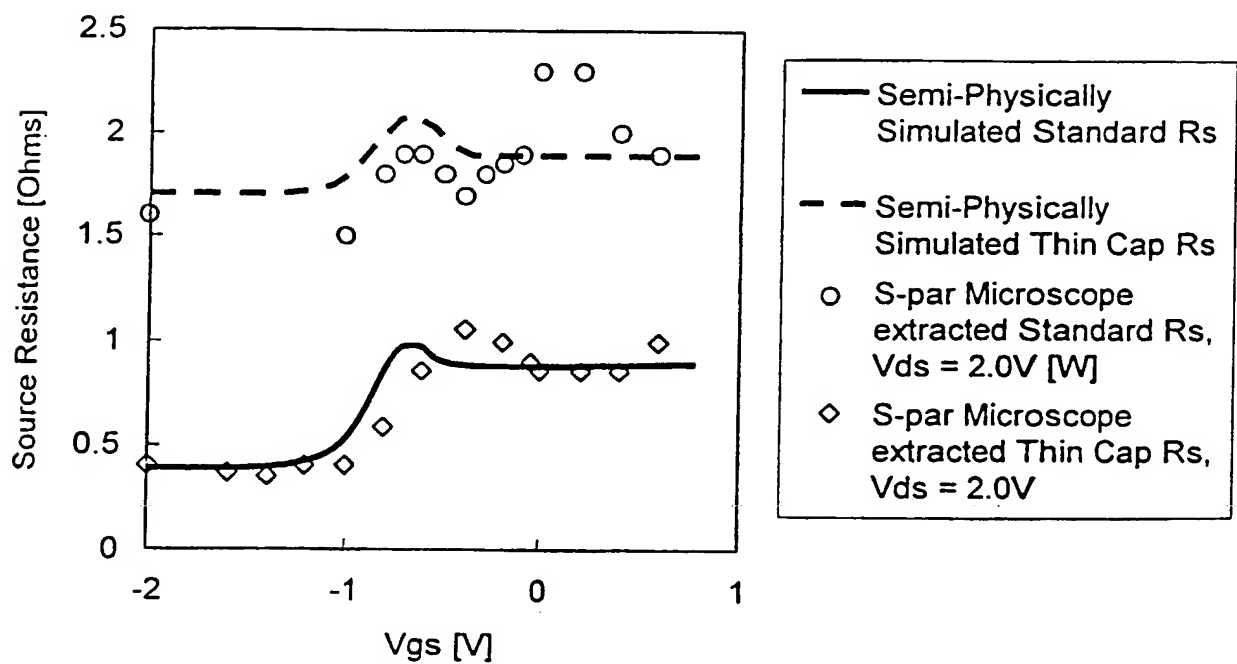


Figure 24B

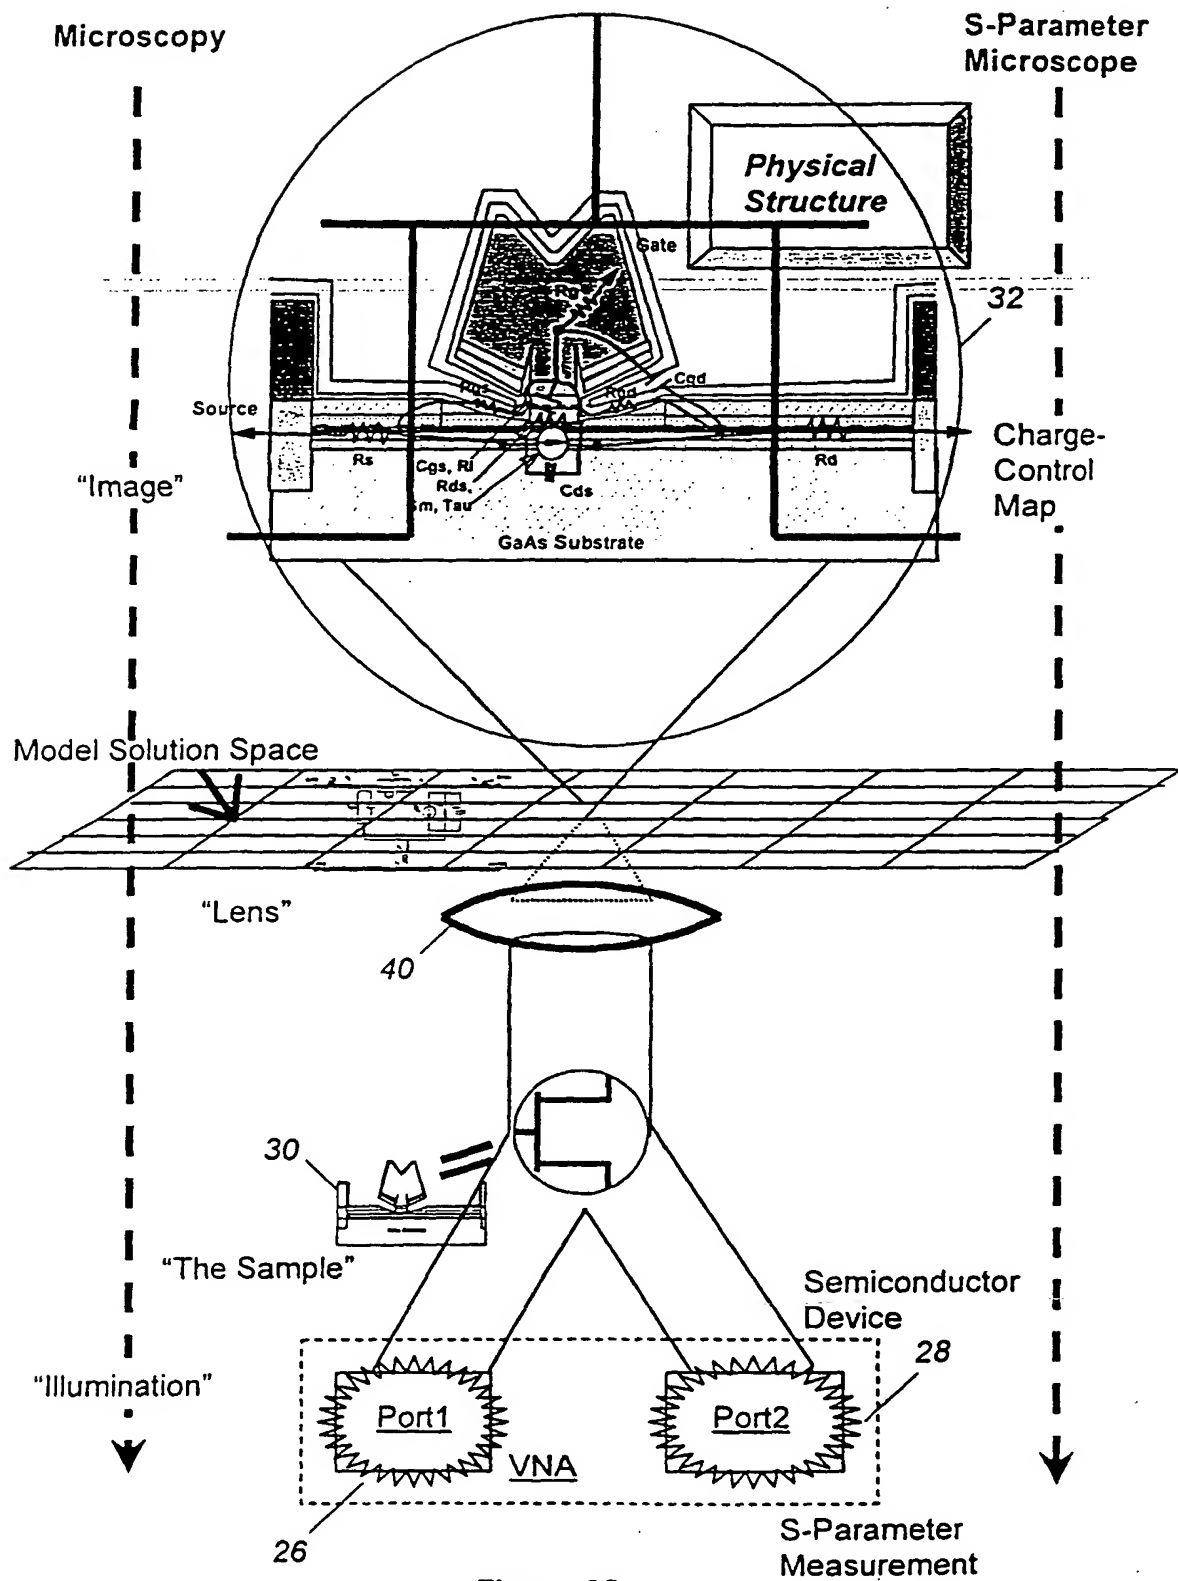

Figur 25

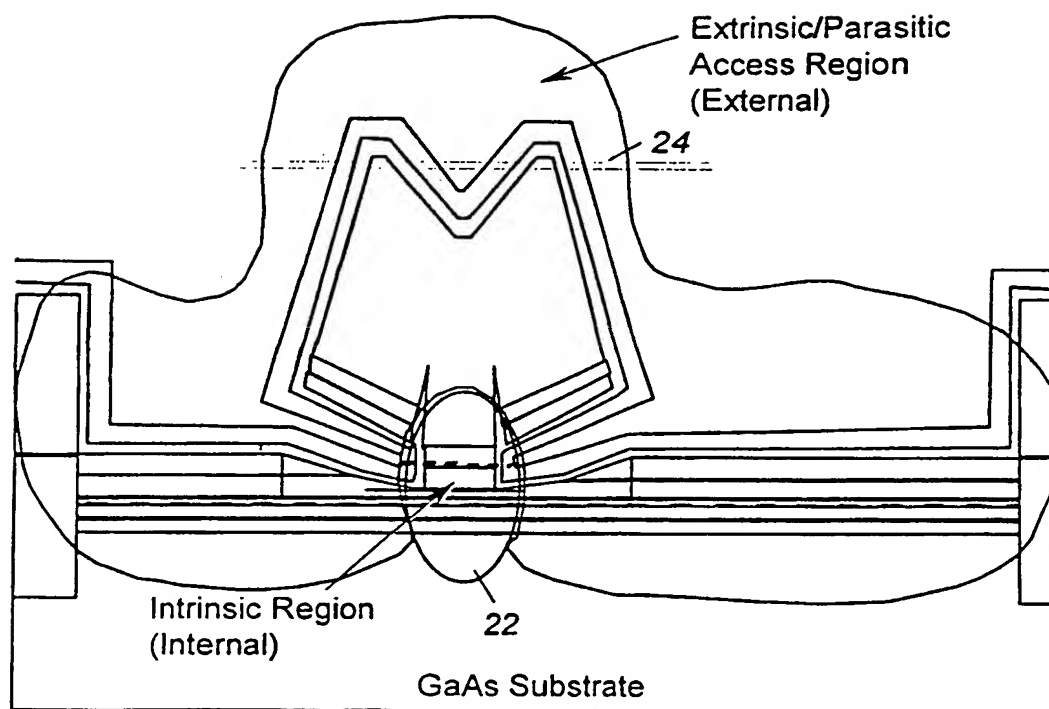


Figure 26

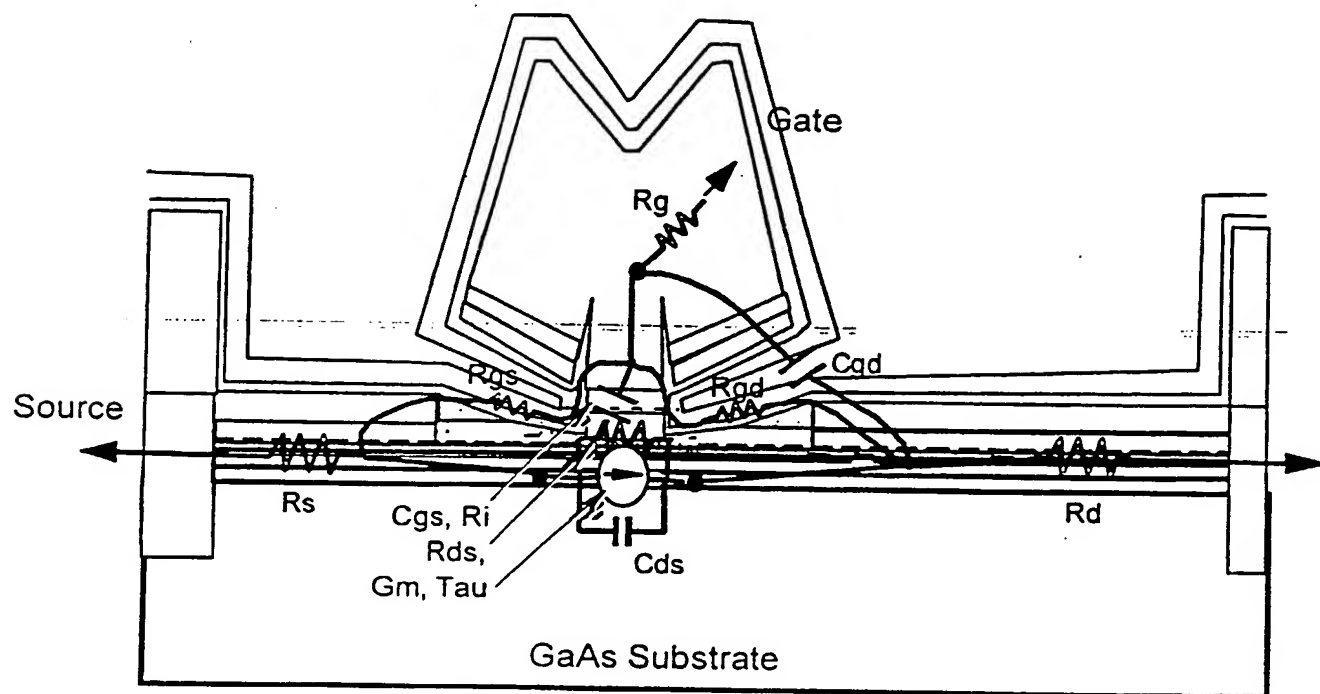


Figure 27

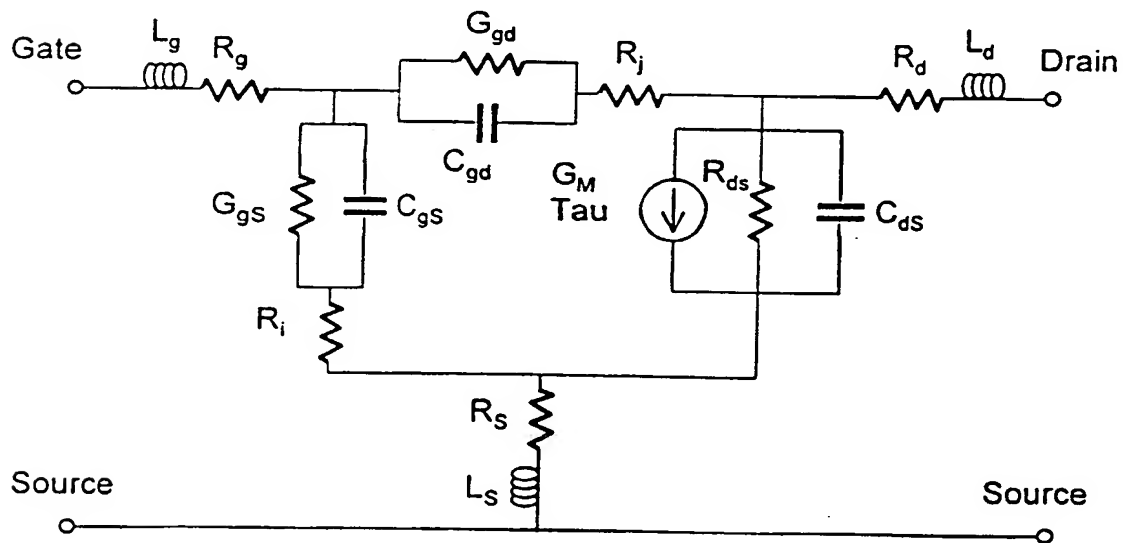


Figure 28

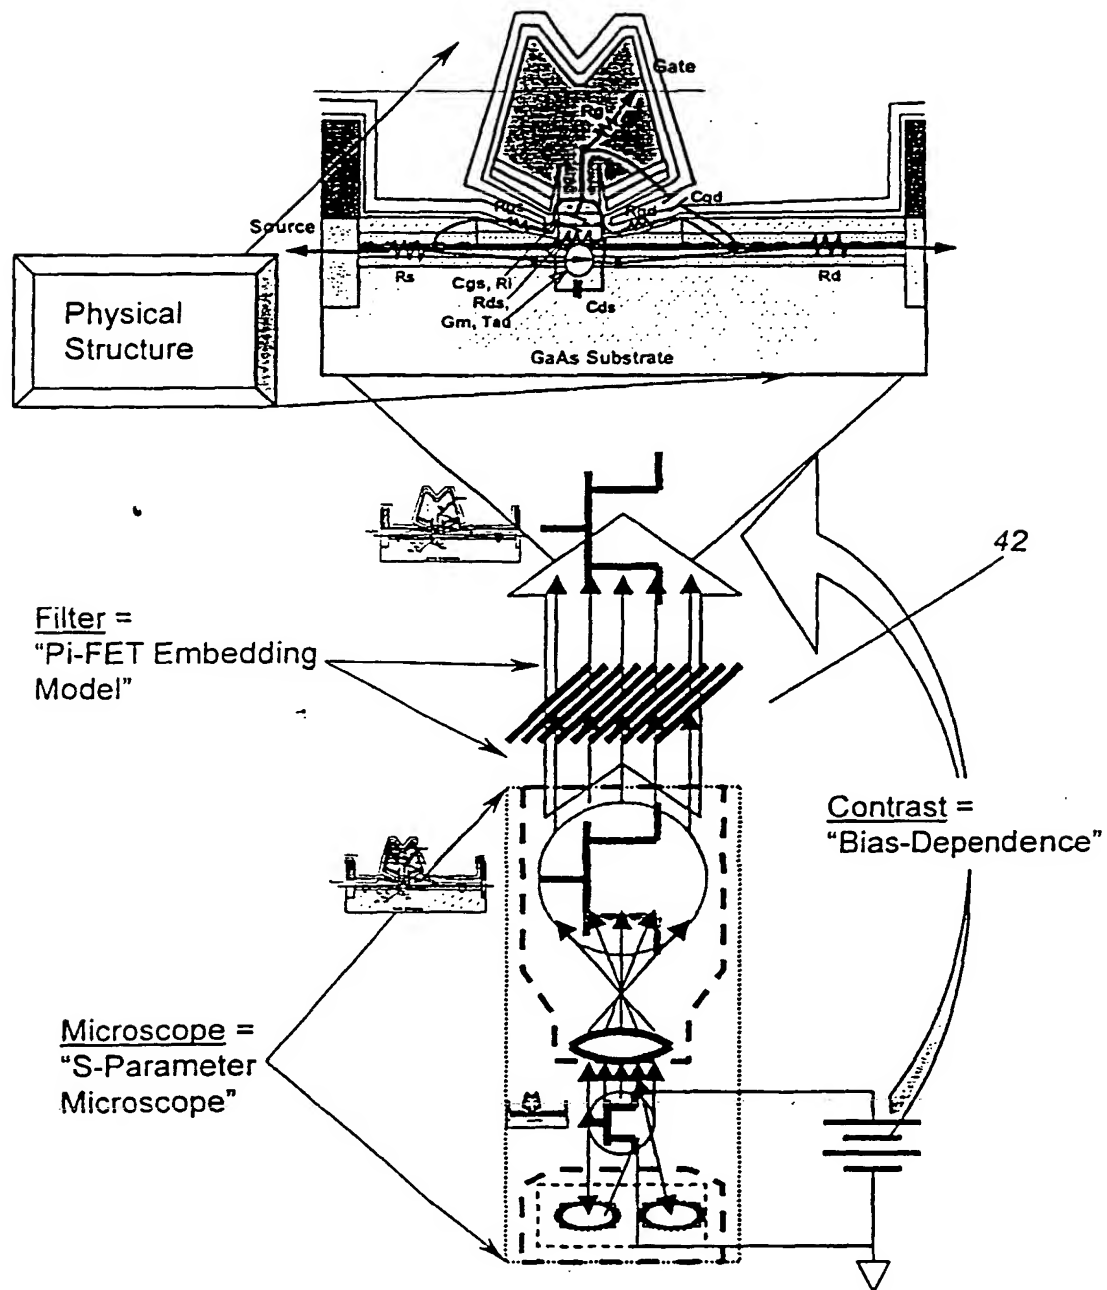


Figure 29

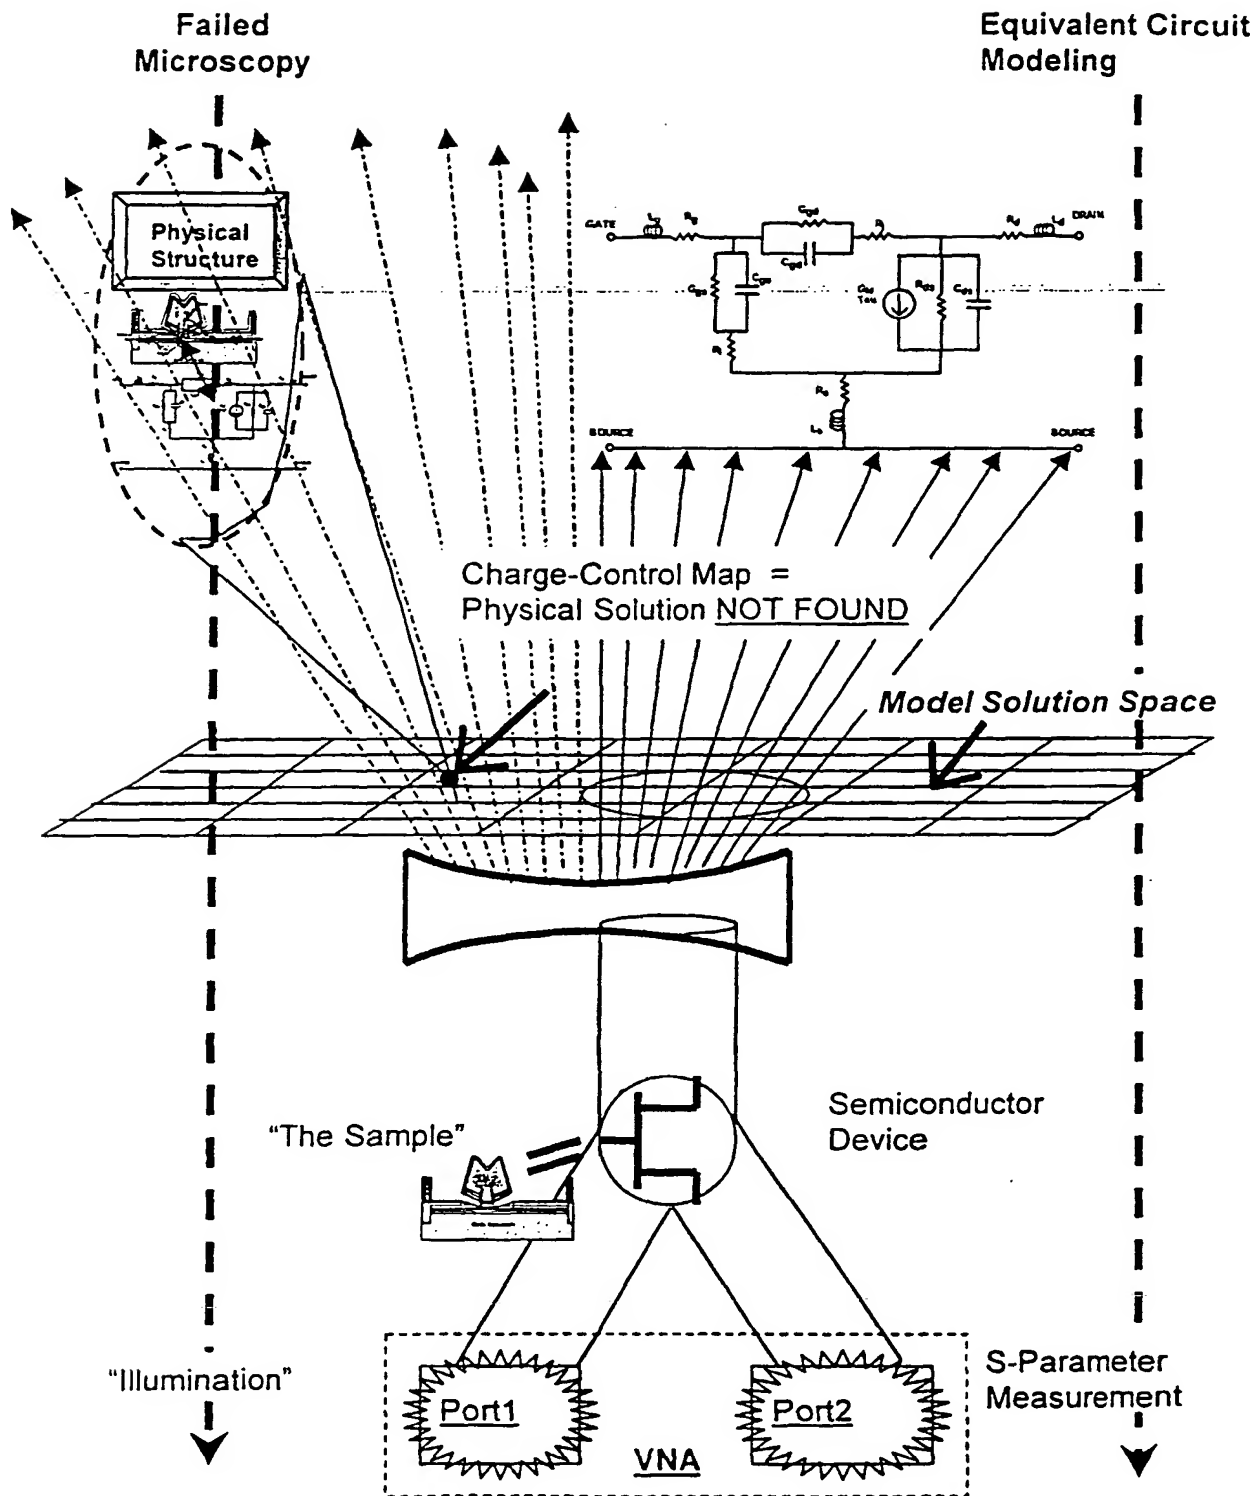


Figure 30


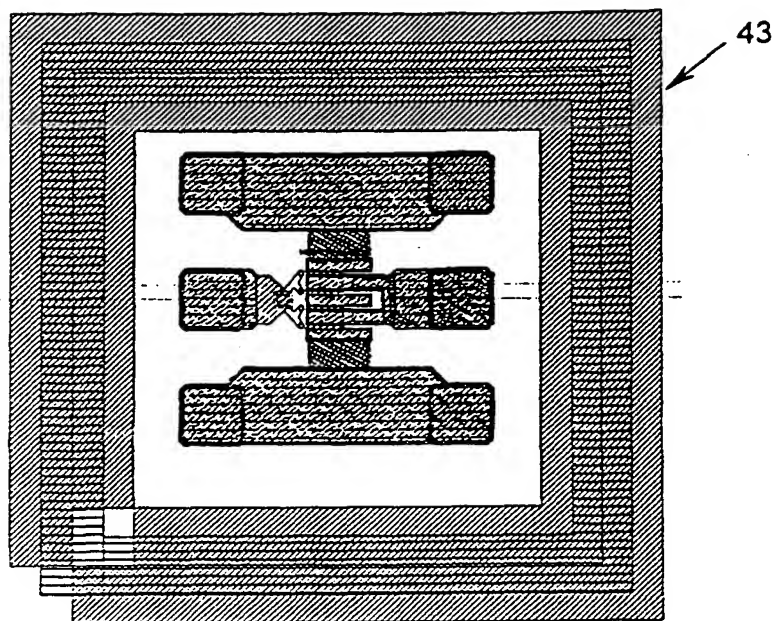


Figure 31

Ids vs Vds for the Measured HEMT Device

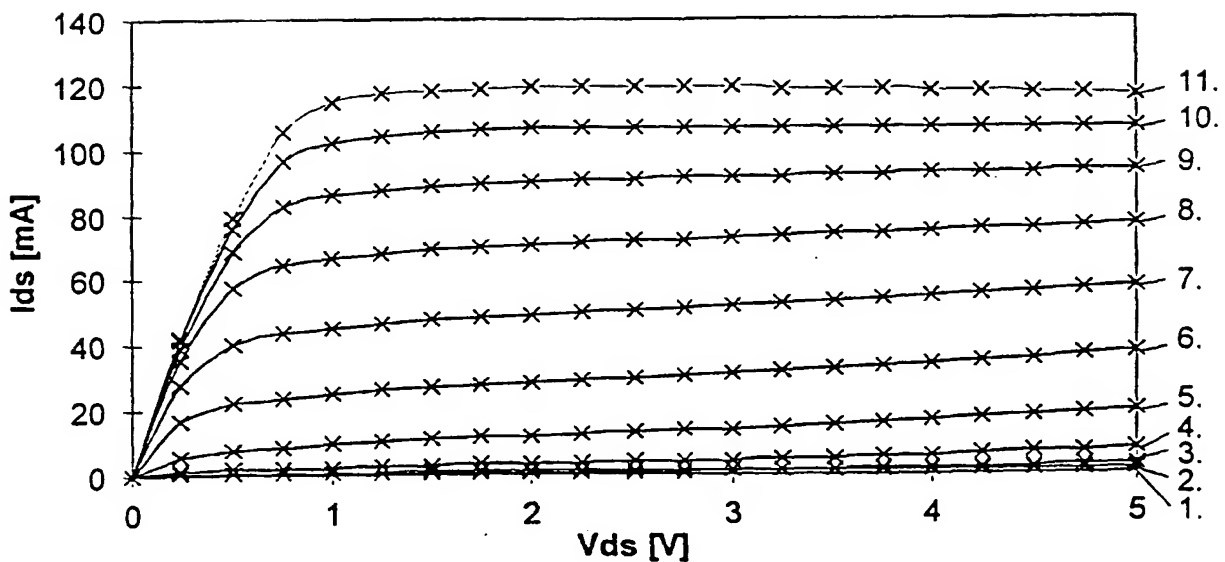

—x— 1. Ids [mA], Vgs = -1.4 V	—x— 2. Ids [mA], Vgs = -1.2 V	—x— 3. Ids [mA], Vgs = -1 V
—x— 4. Ids [mA], Vgs = -0.8 V	—x— 5. Ids [mA], Vgs = -0.6 V	—x— 6. Ids [mA], Vgs = -0.4 V
—x— 7. Ids [mA], Vgs = -0.2 V	—x— 8. Ids [mA], Vgs = 0.0 V	—x— 9. Ids [mA], Vgs = 0.2 V
—x— 10. Ids [mA], Vgs = 0.4 V	—x— 11. Ids [mA], Vgs = 0.6 V	

Figure 32

Ids and Gm vs Vgs for th Measured D vice

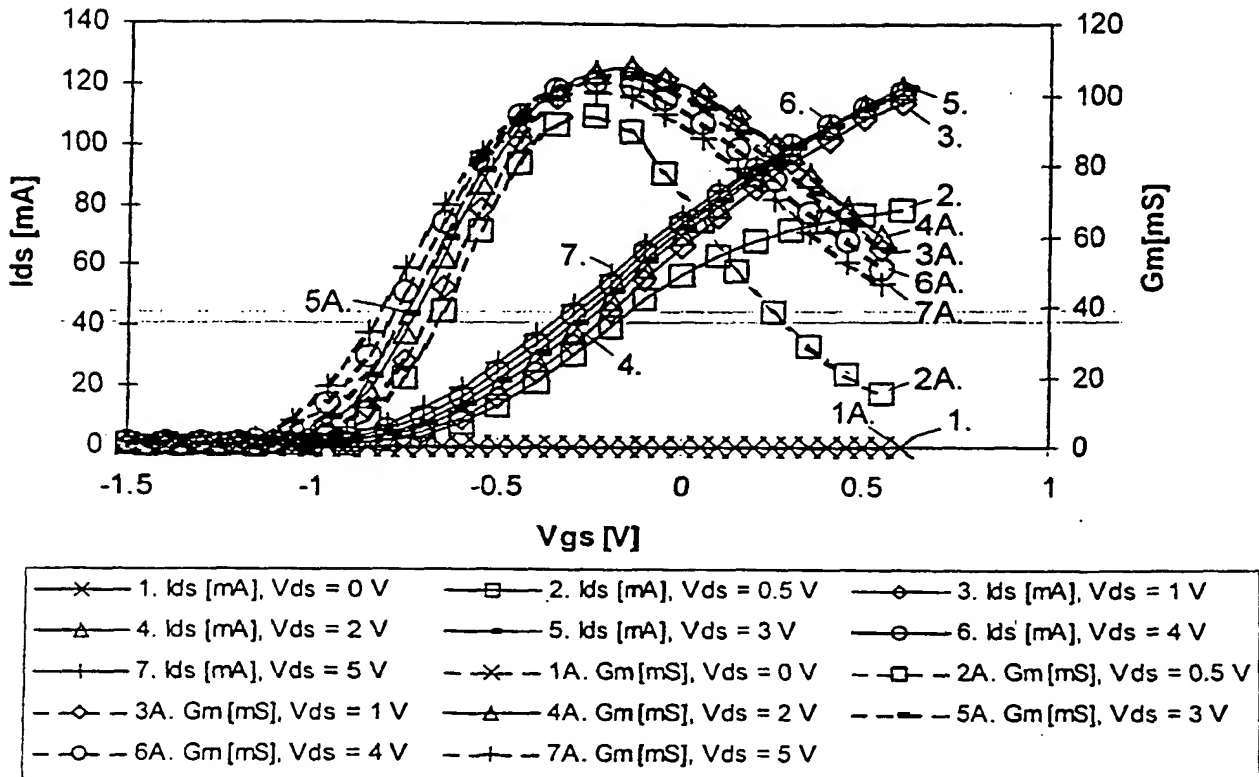


Figure 33

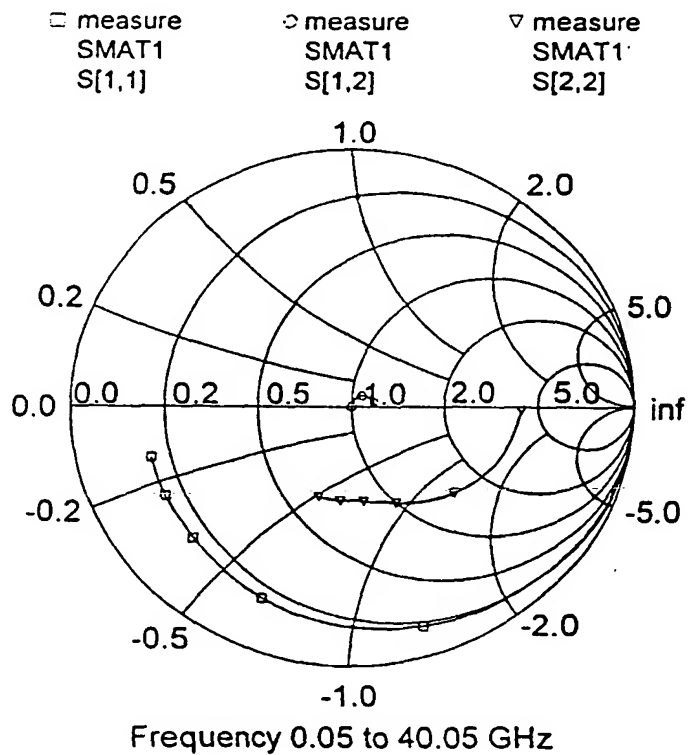


Figure 34

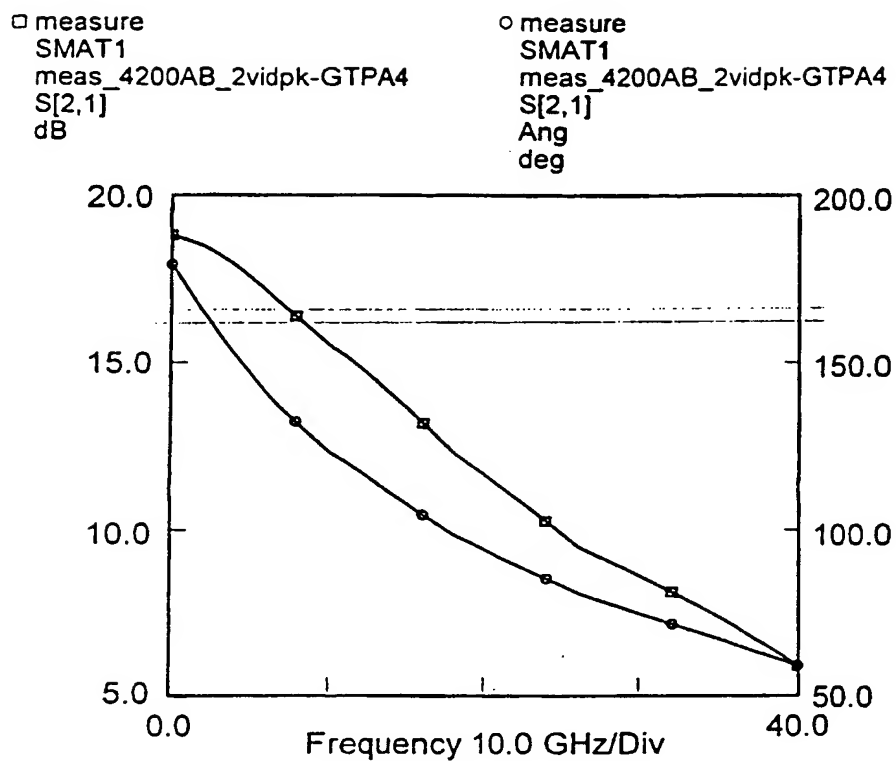


Figure 35

Intrinsic Device Source Resistance vs Gate Bias

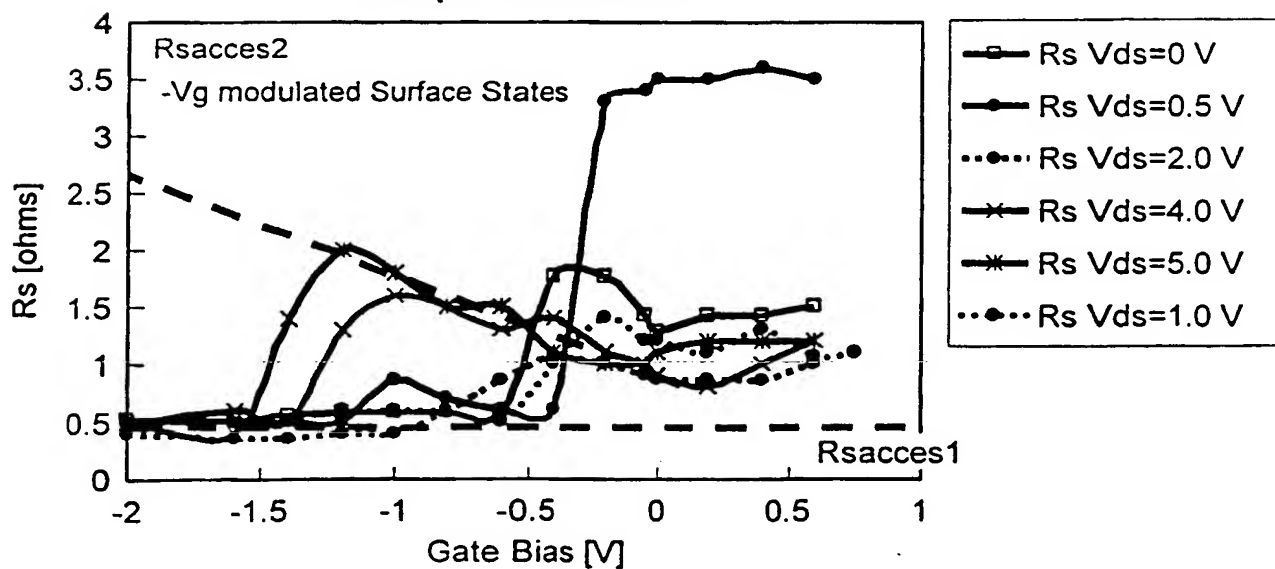
0.15 μm P3H4 HEMT

Figure 36


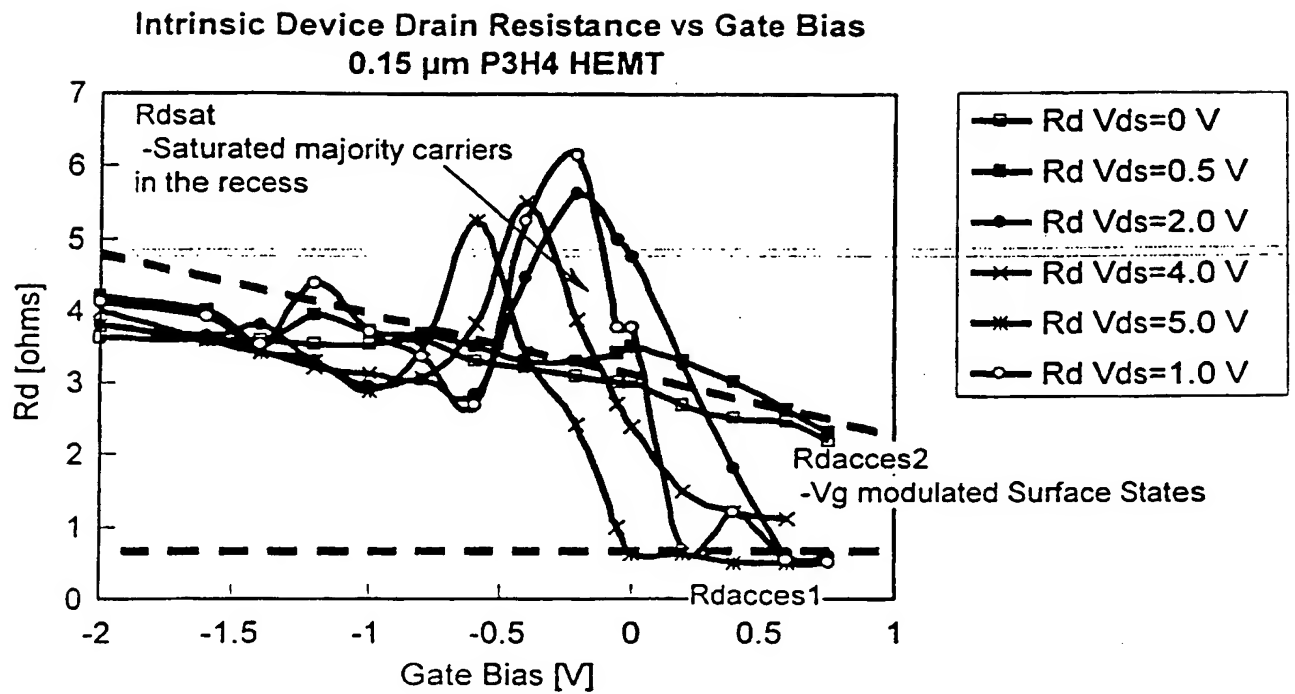


Figure 37

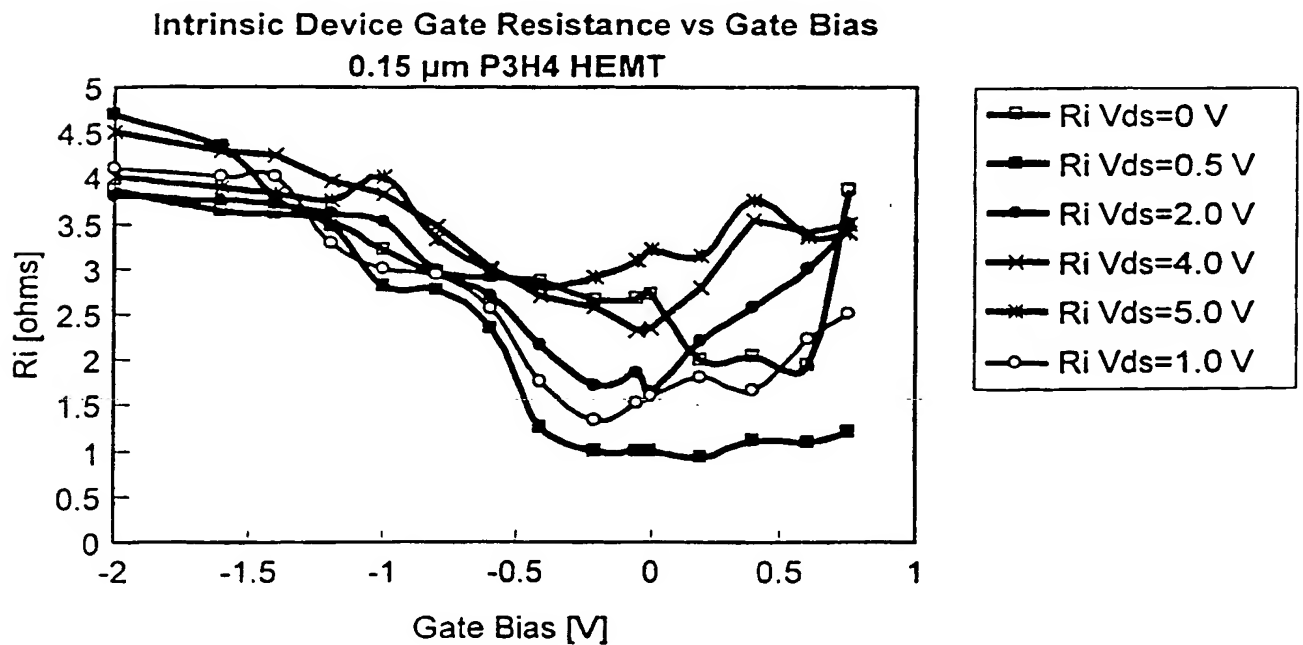

Figur 38

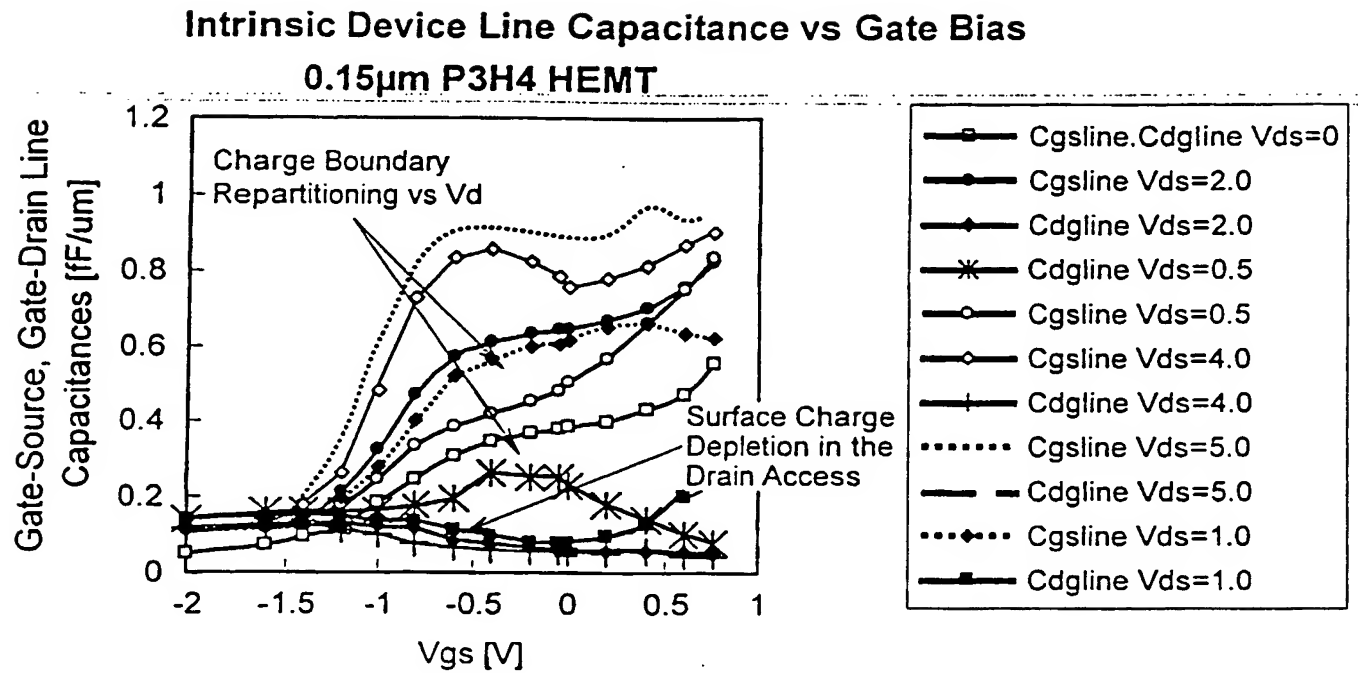


Figure 39

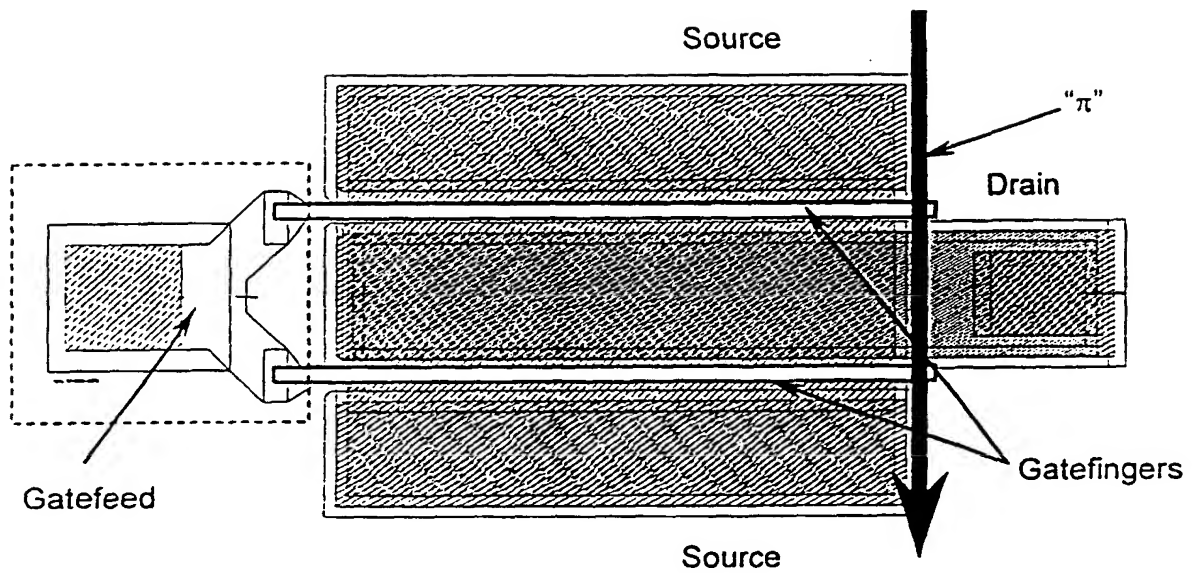


Figure 40

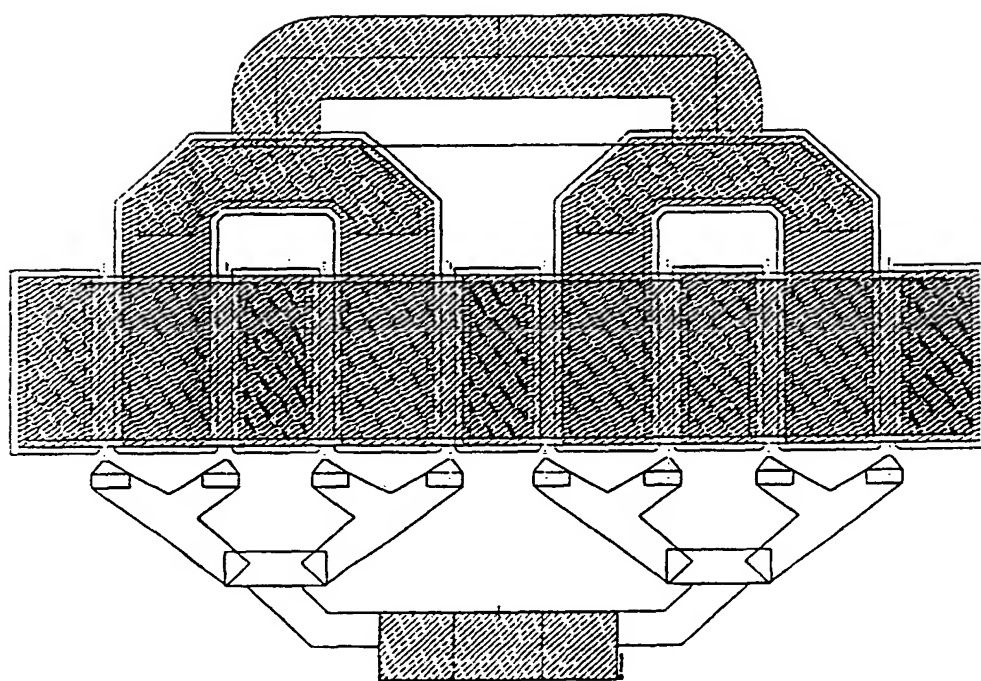


Figure 41.

Model Construction

- 1) Off-Mesa, or Boundary Parasitic Model
- 2) Inter-electrode Parasitic Model
- 3) On-Mesa Parasitic Model
- 4) Intrinsic Model

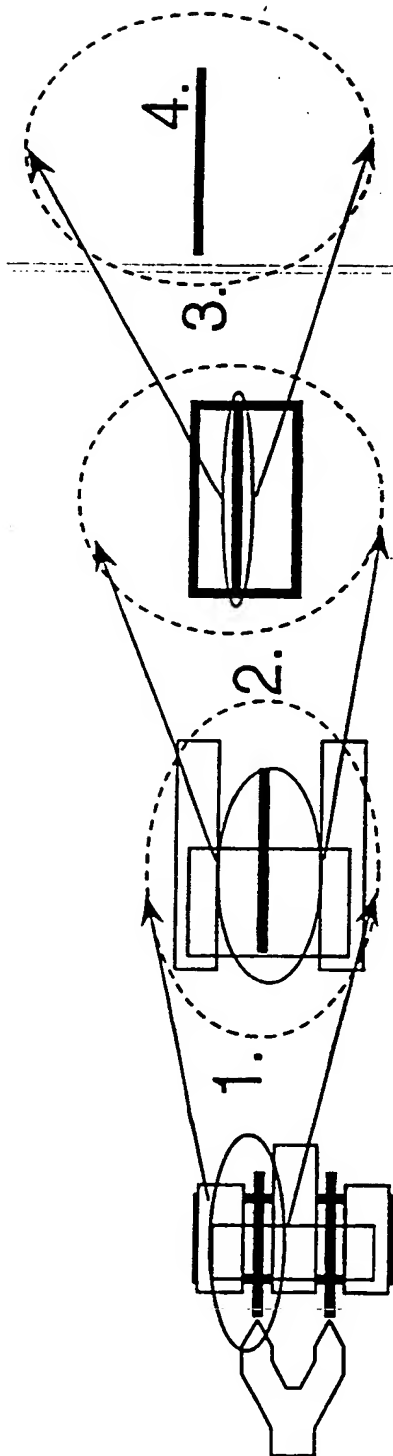


Figure 42

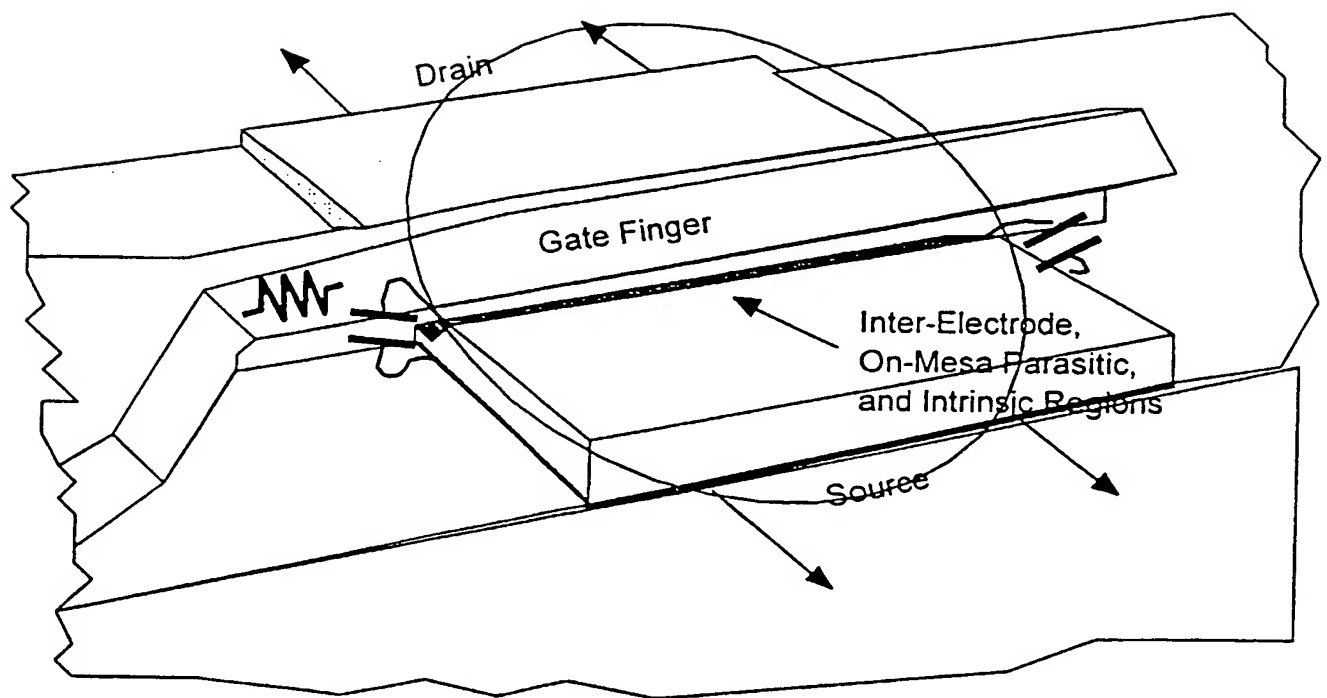


Figure 43

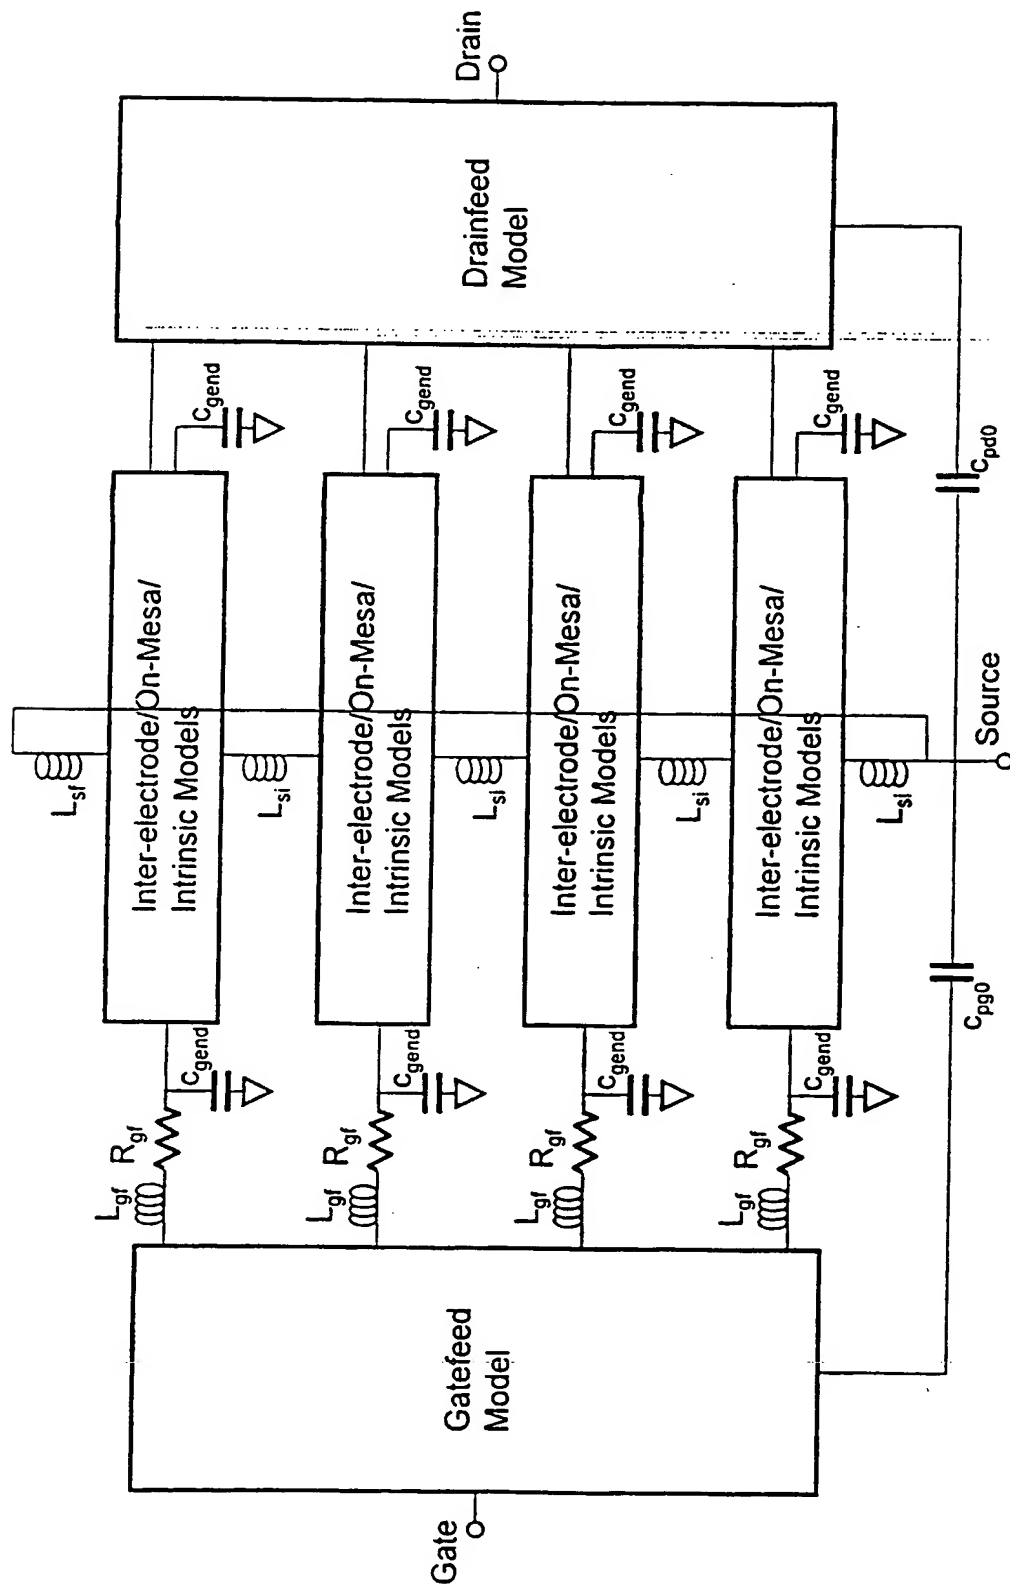


Figure 44

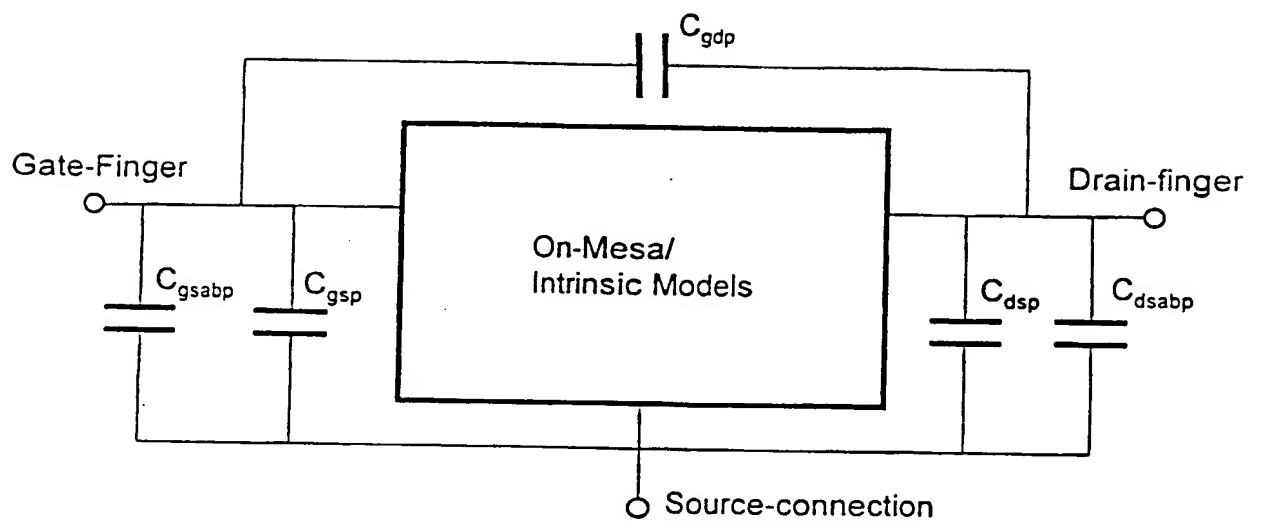


Figure 46

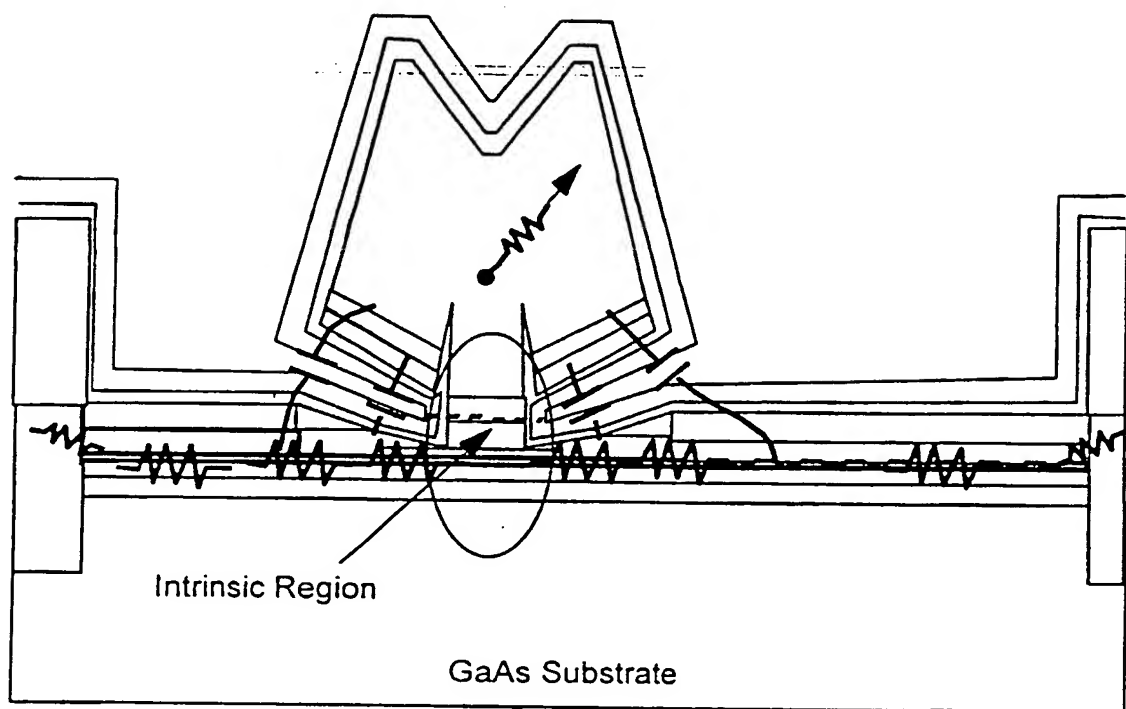


Figure 47

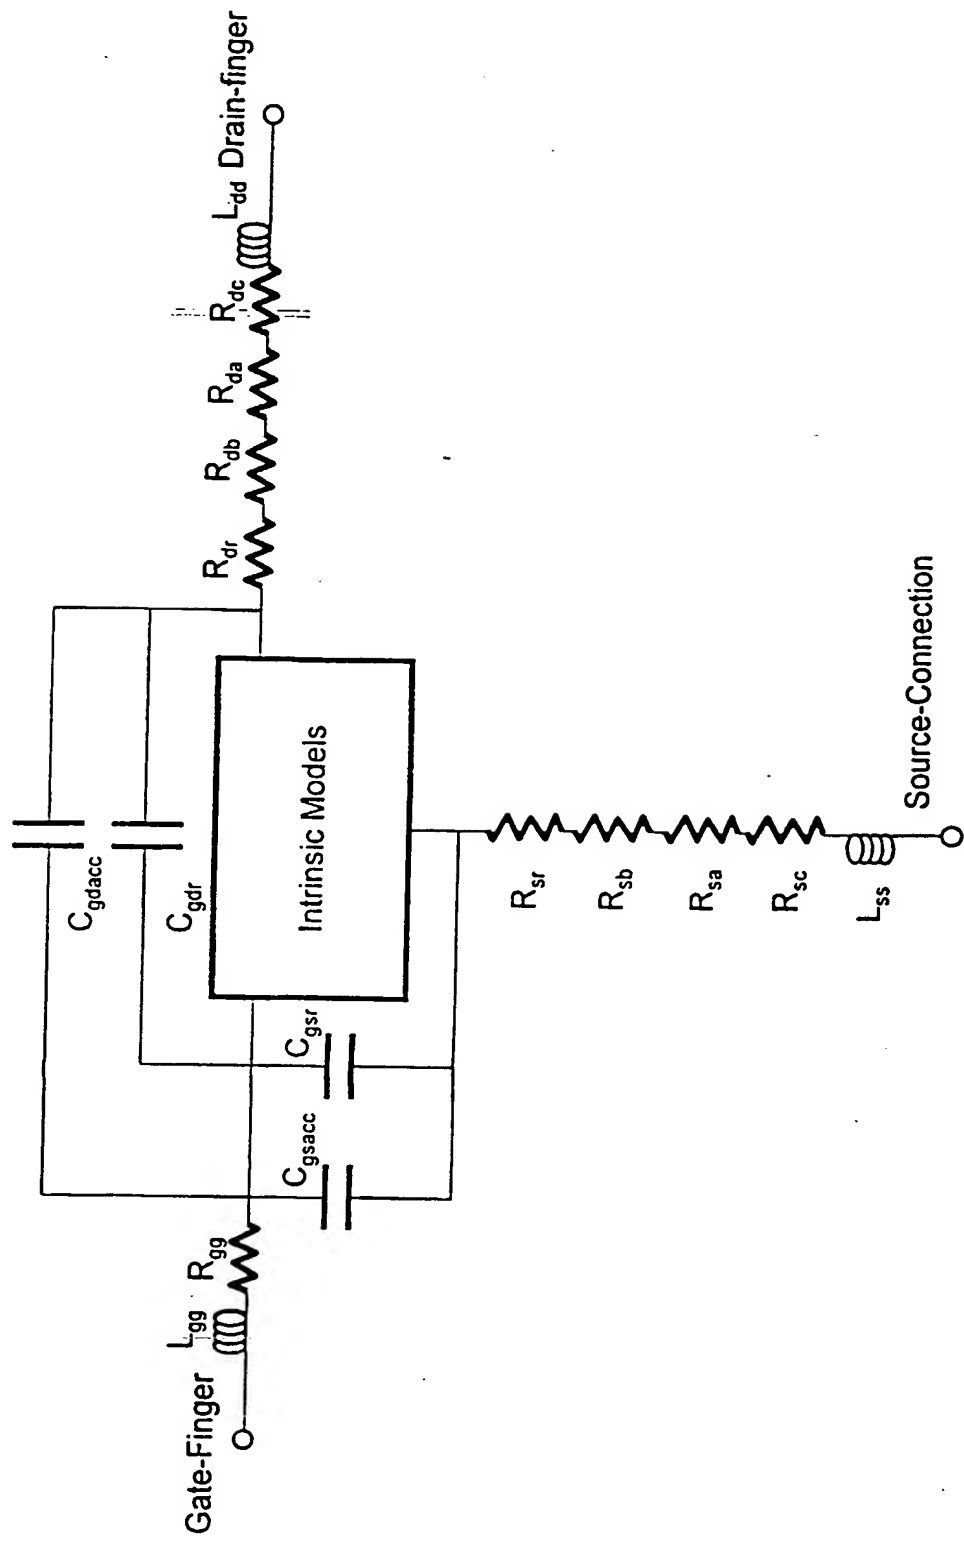


Figure 48

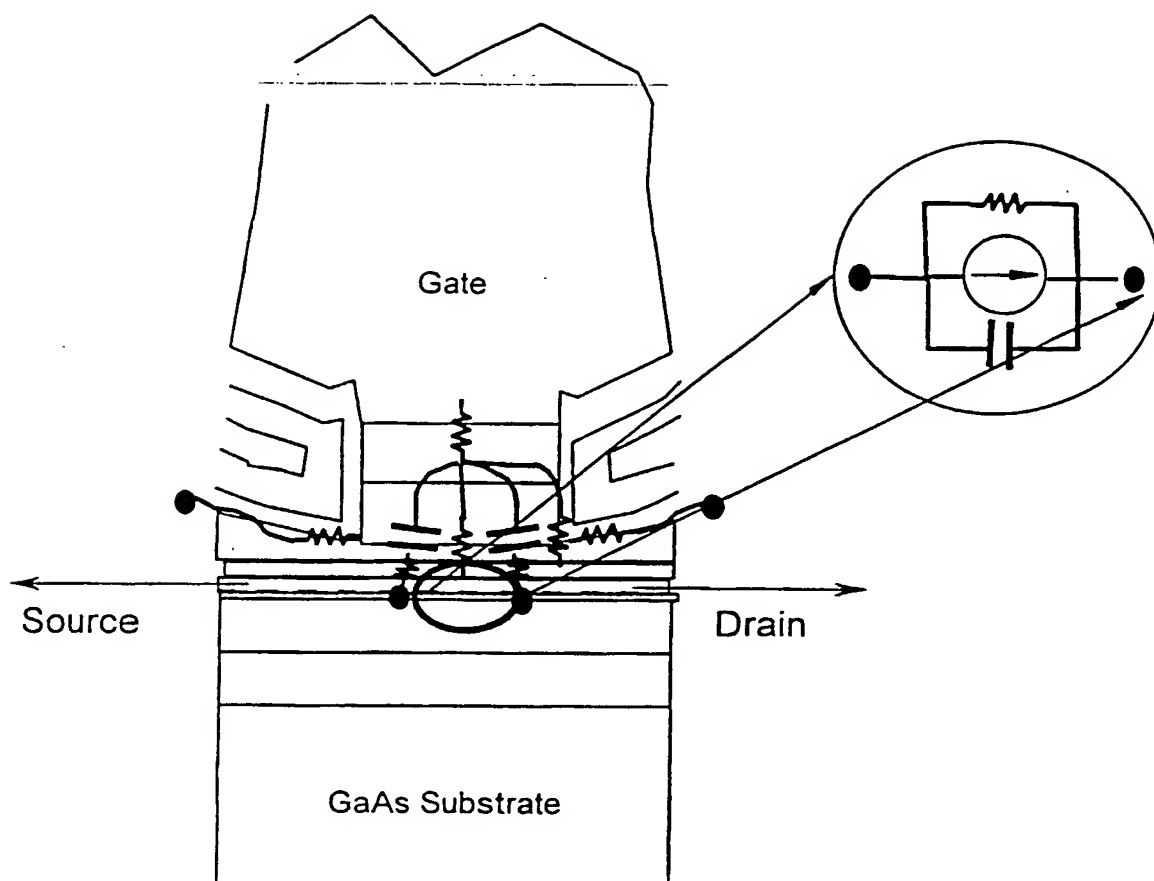


Figure 49

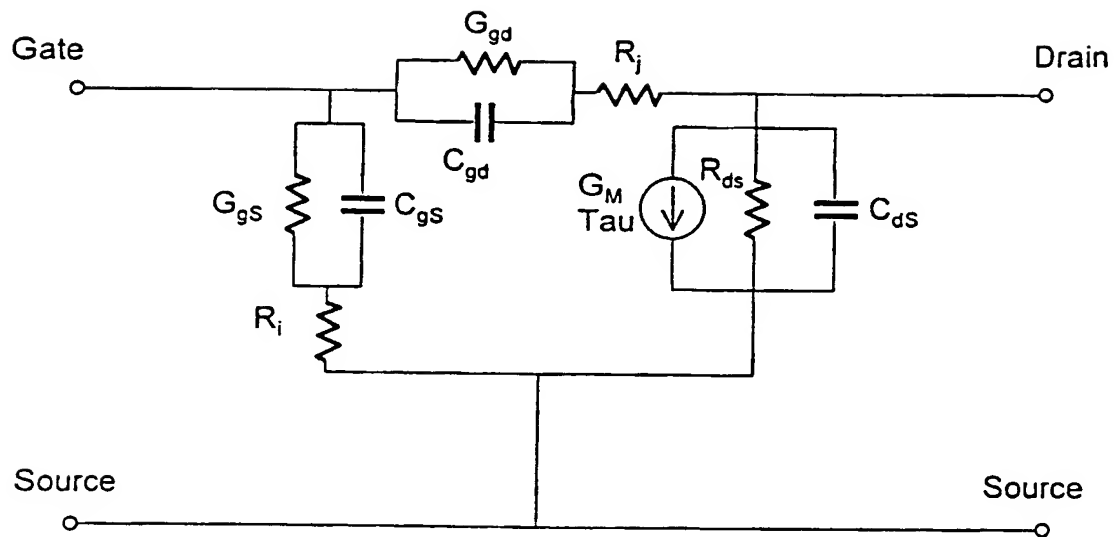


Figure 50

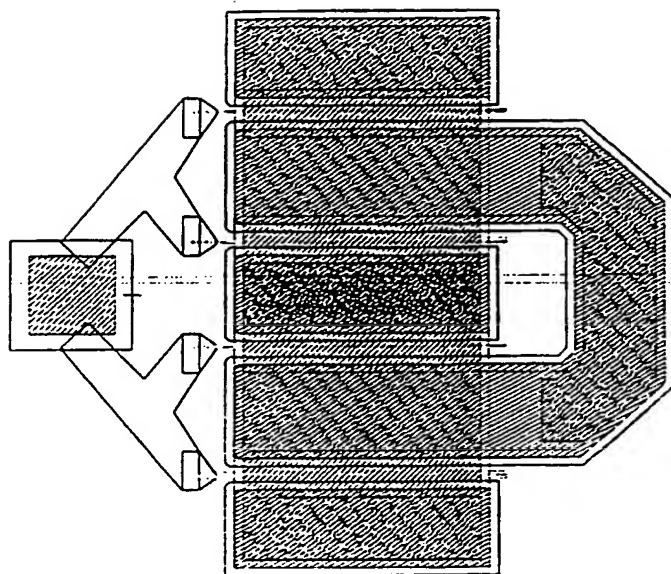


Figure 51A

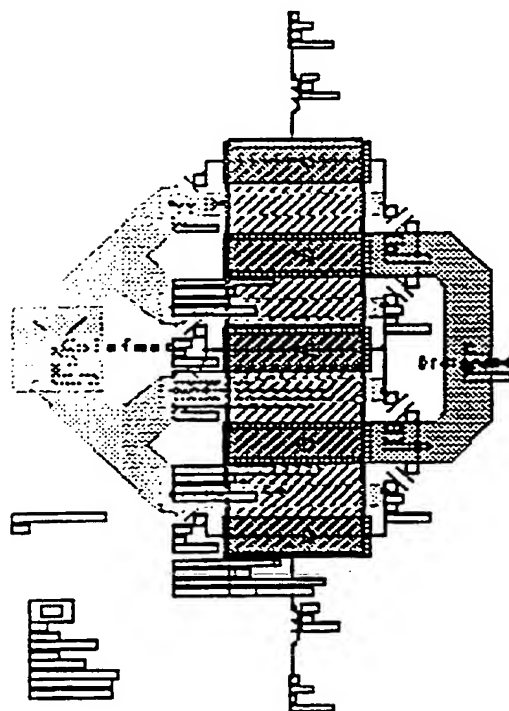


Figure 51B

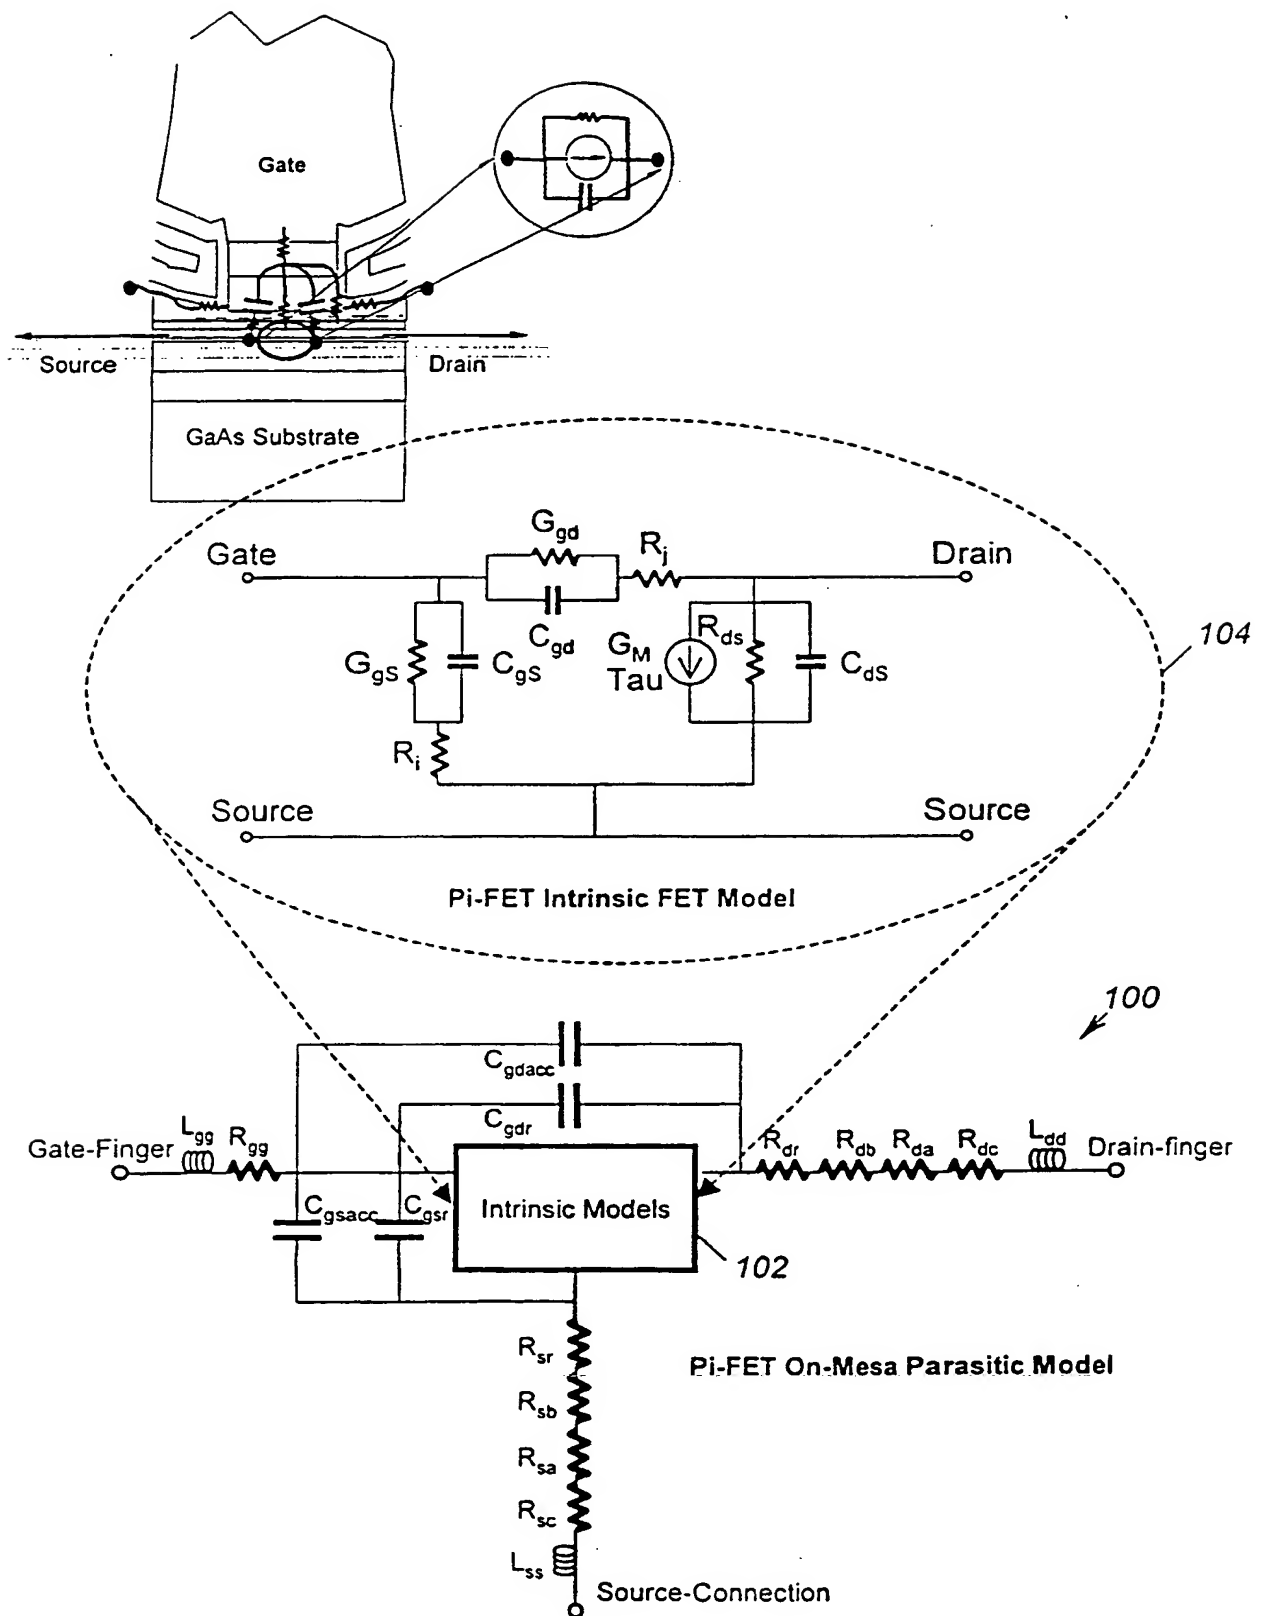


Figure 52

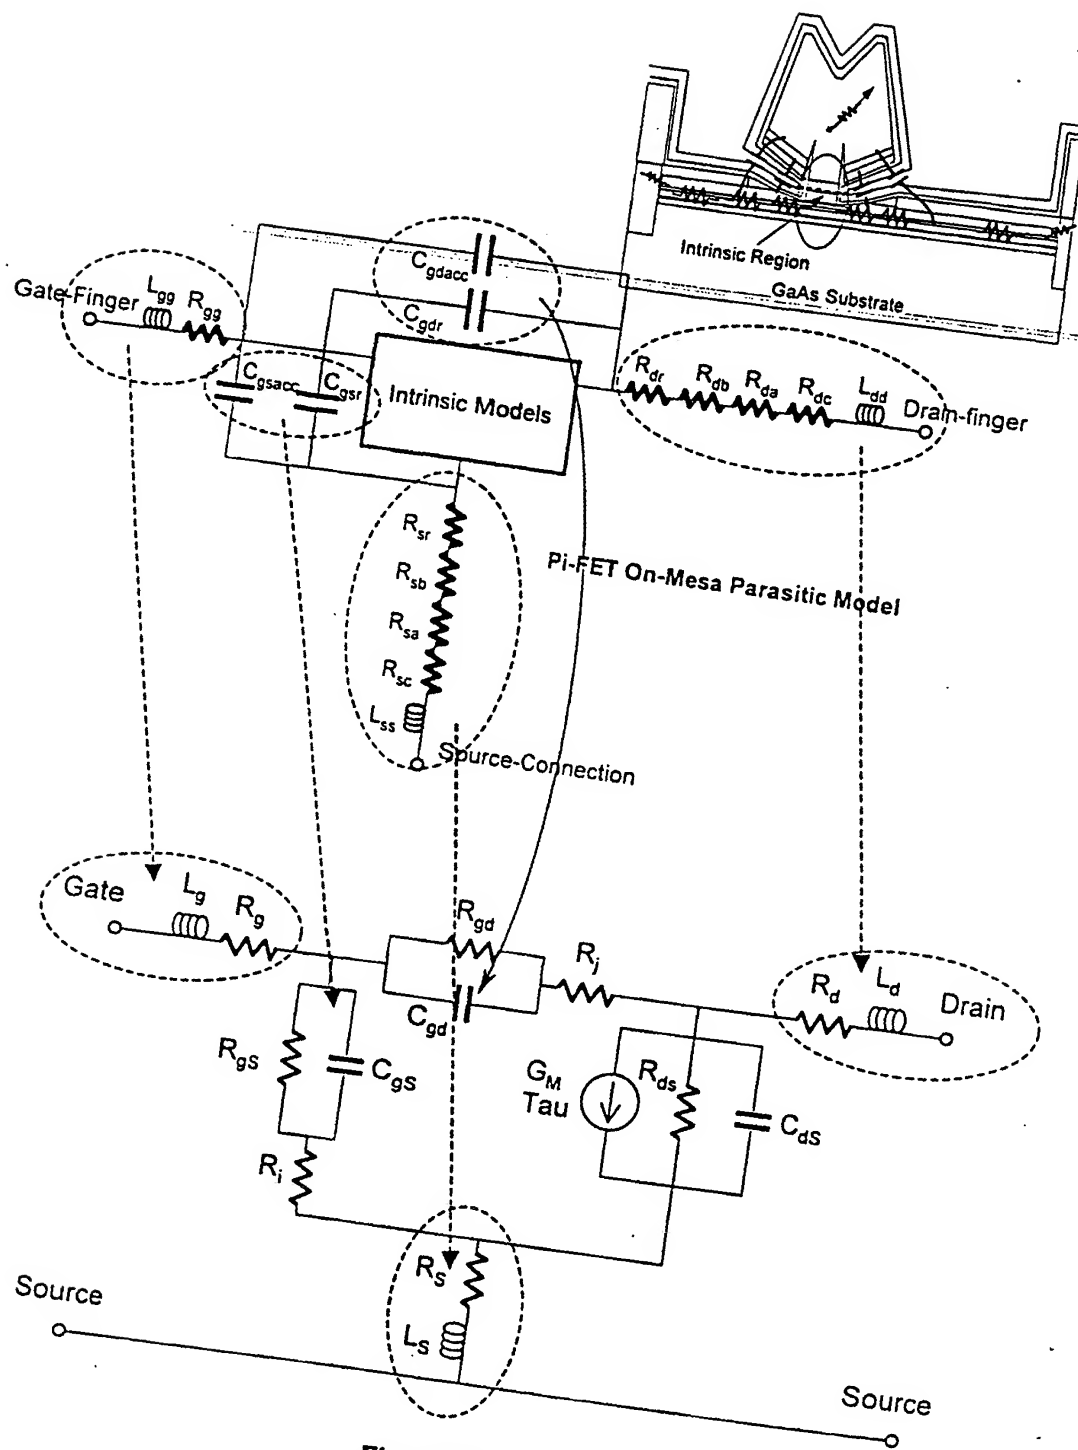


Figure 53

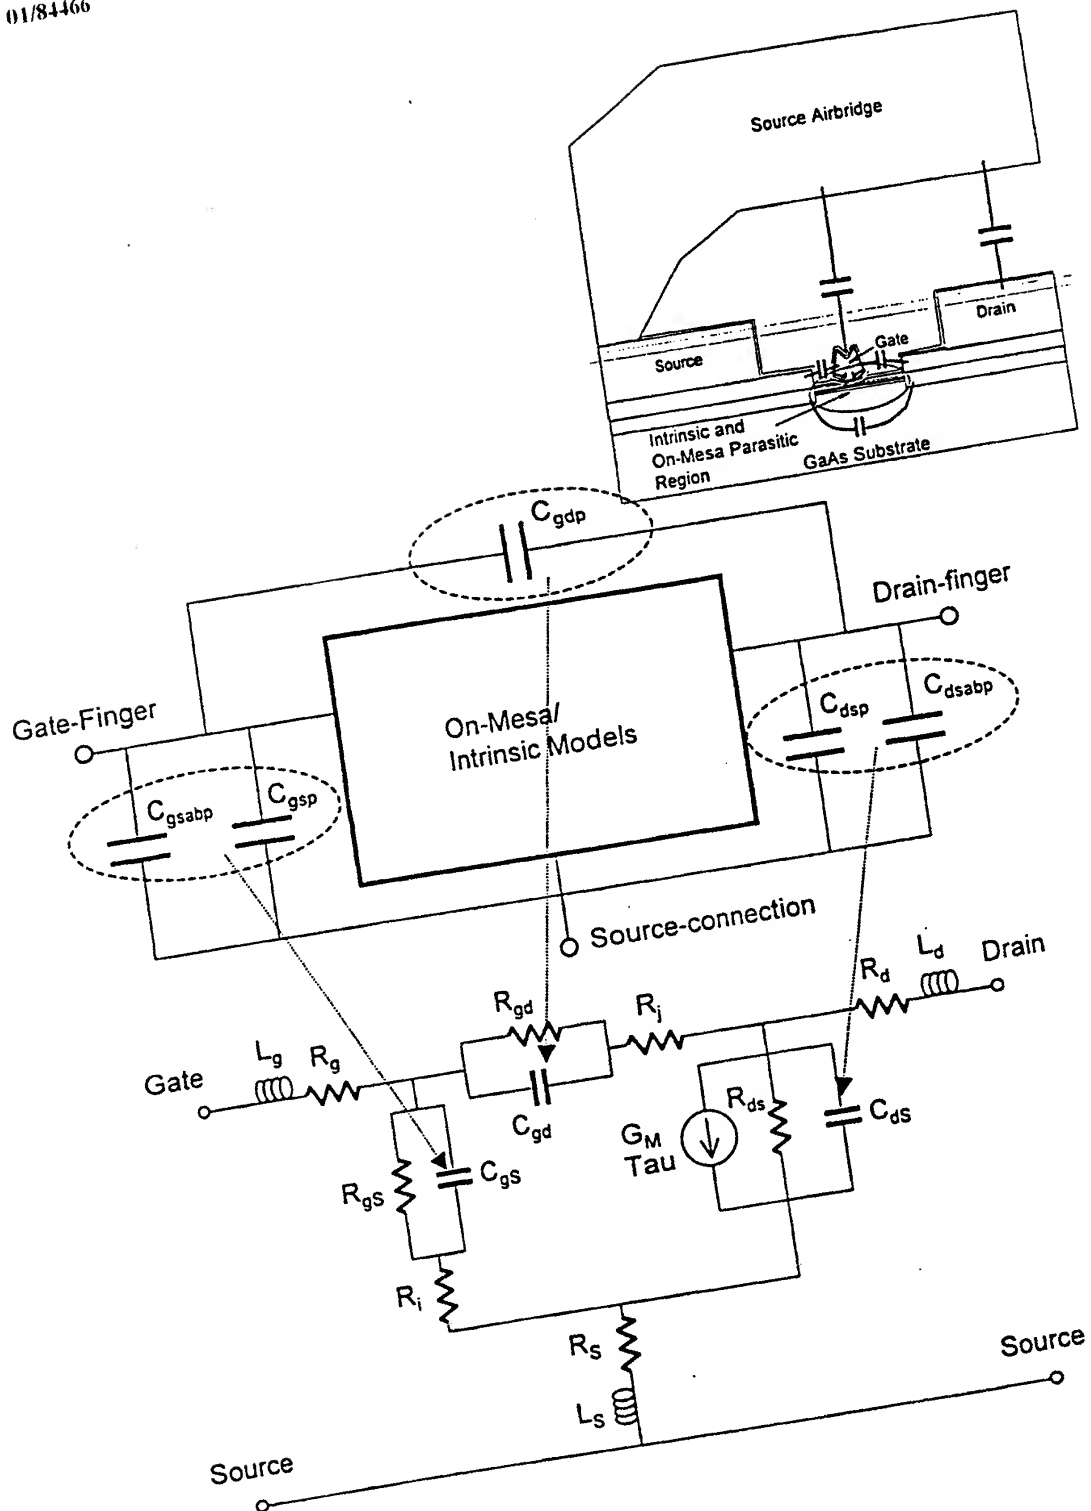


Figure 54

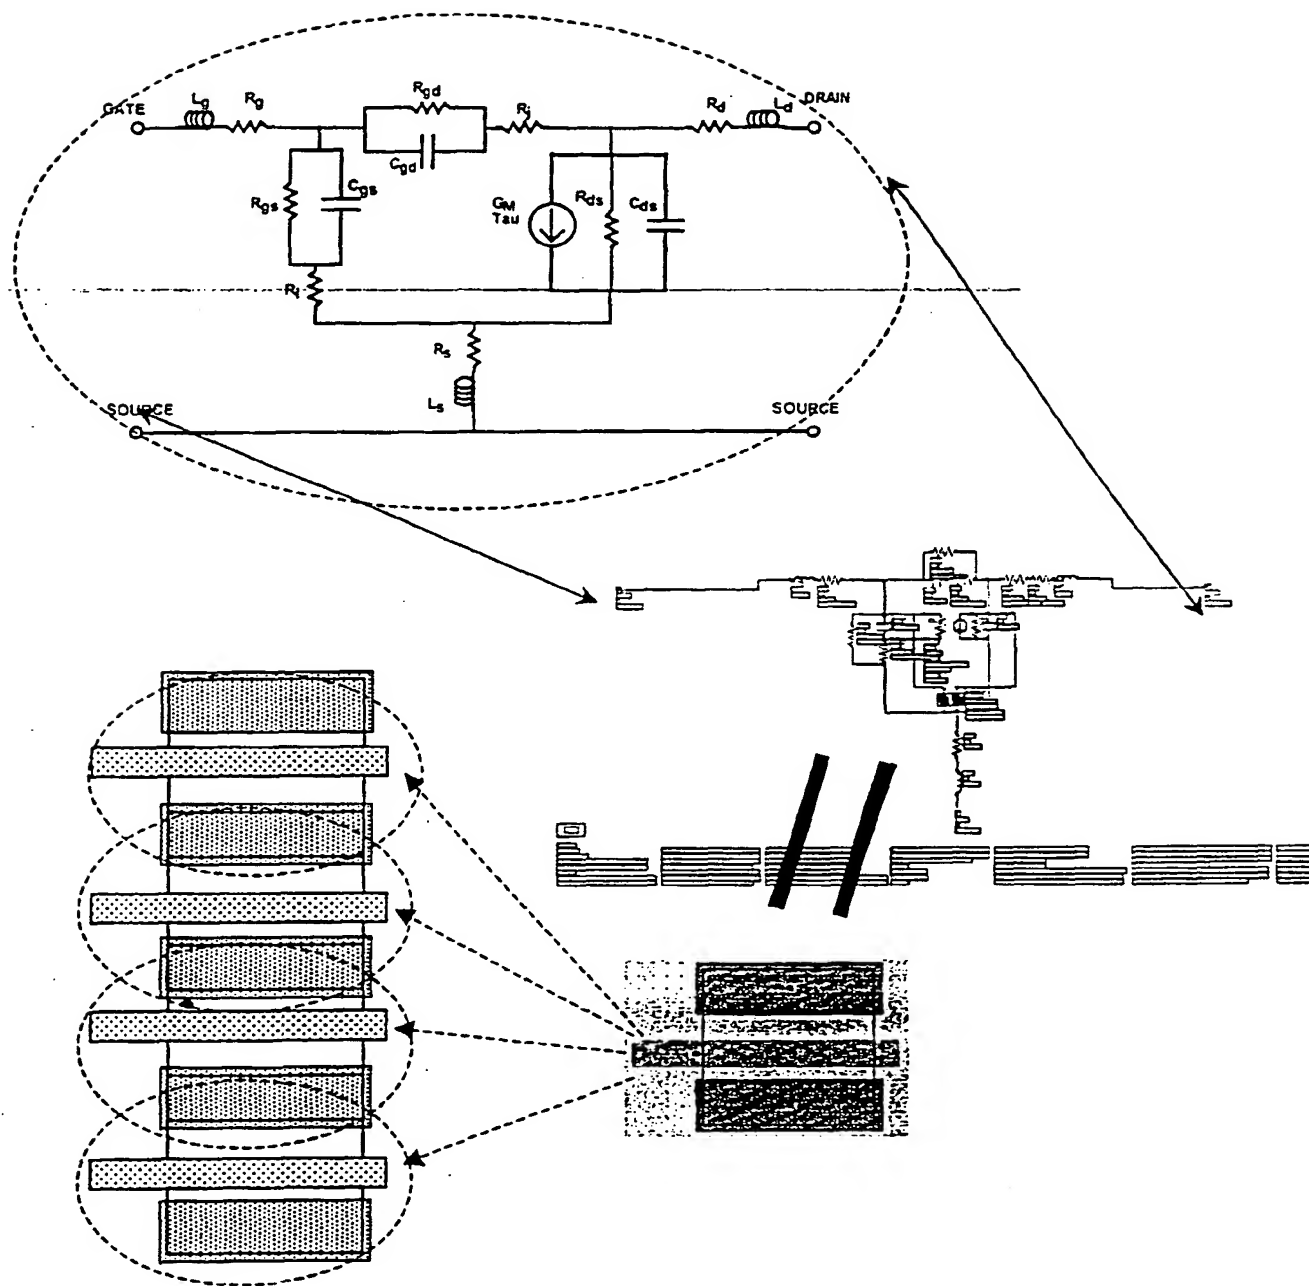


Figure 55

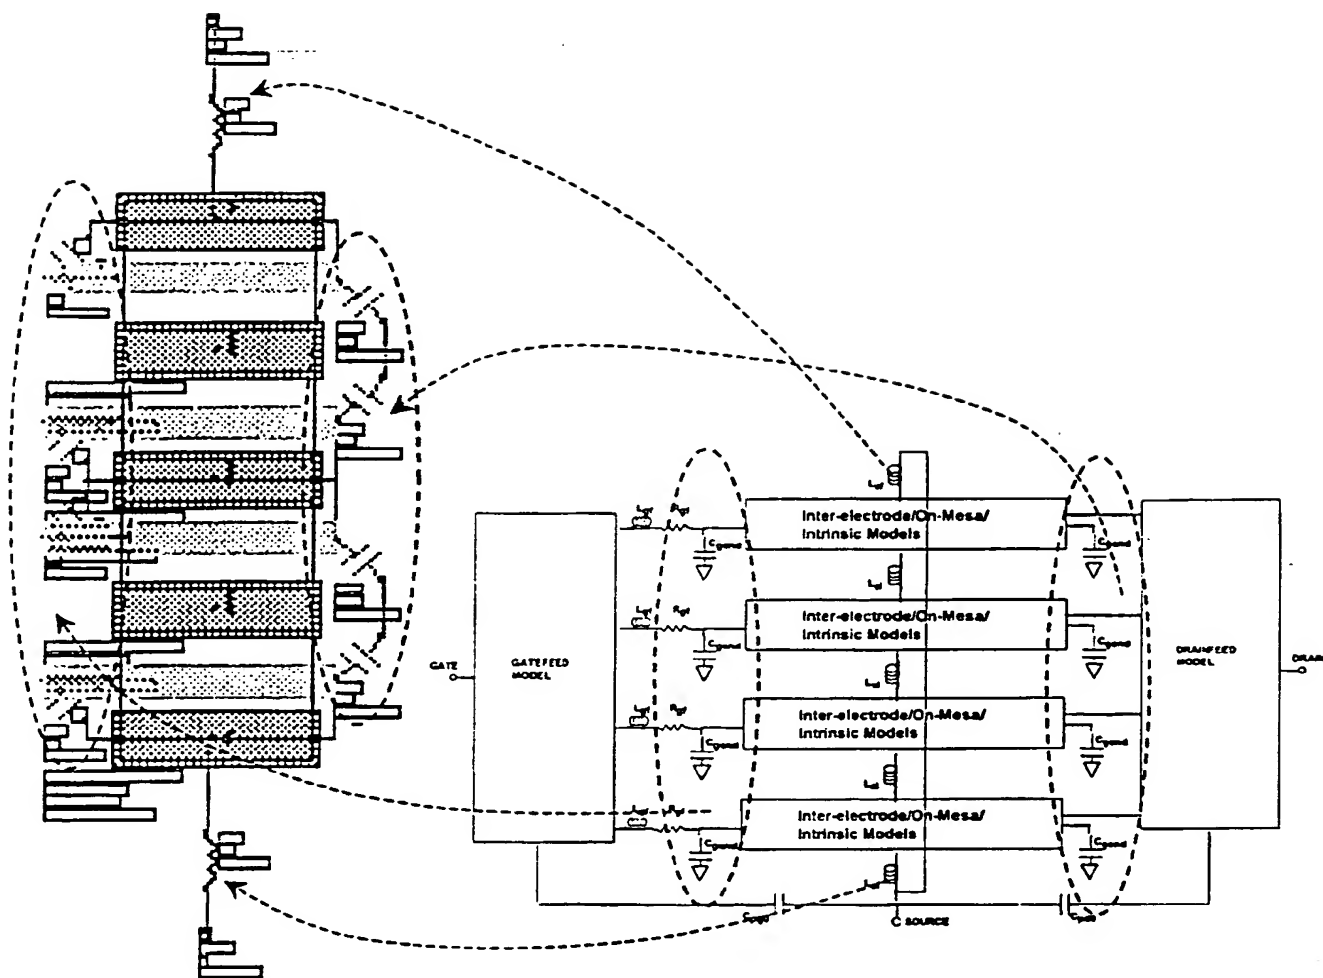


Figure 56


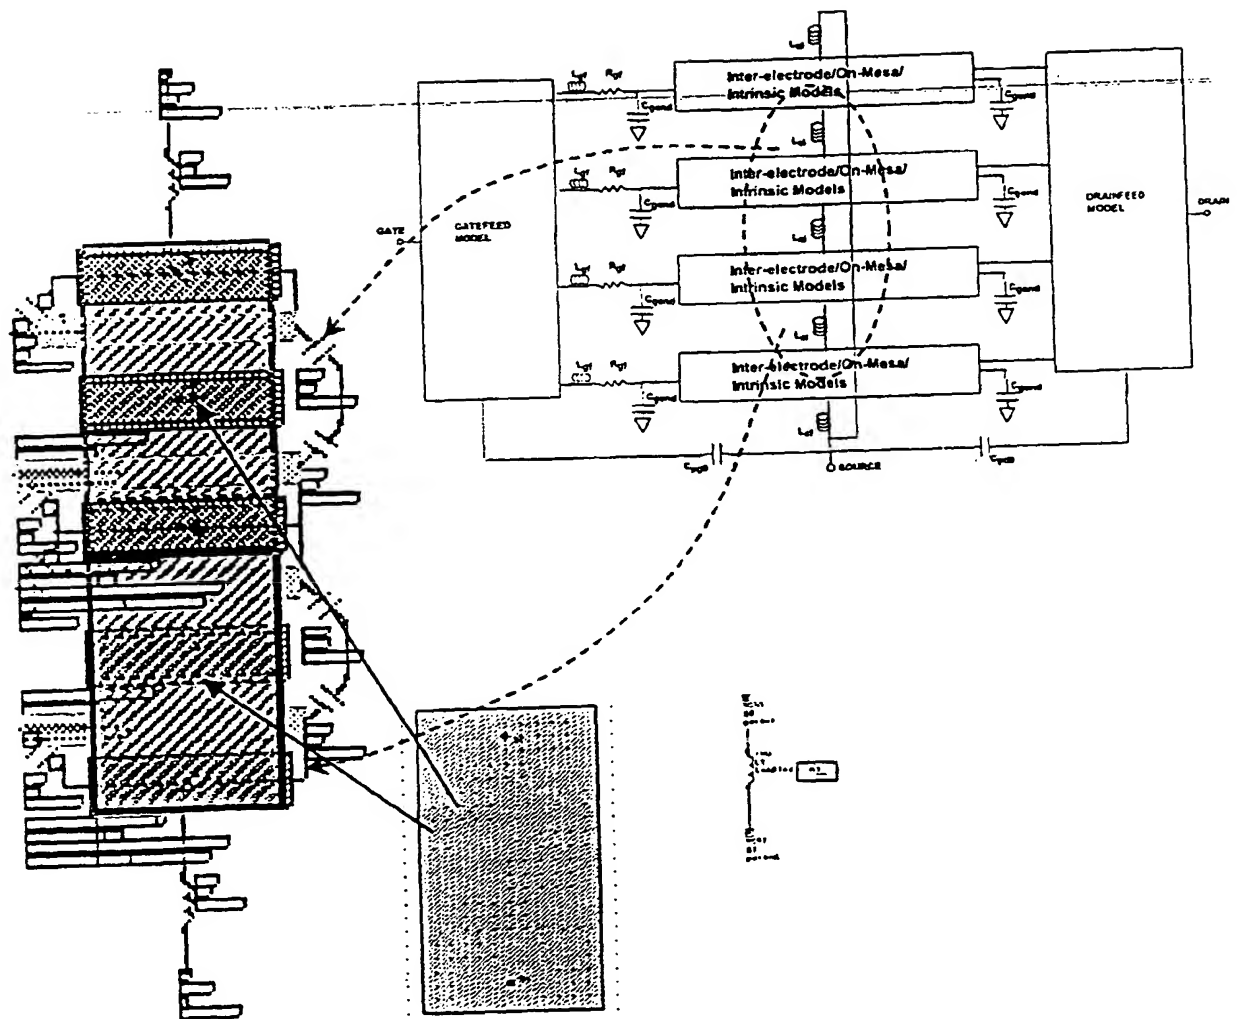


Figure 57

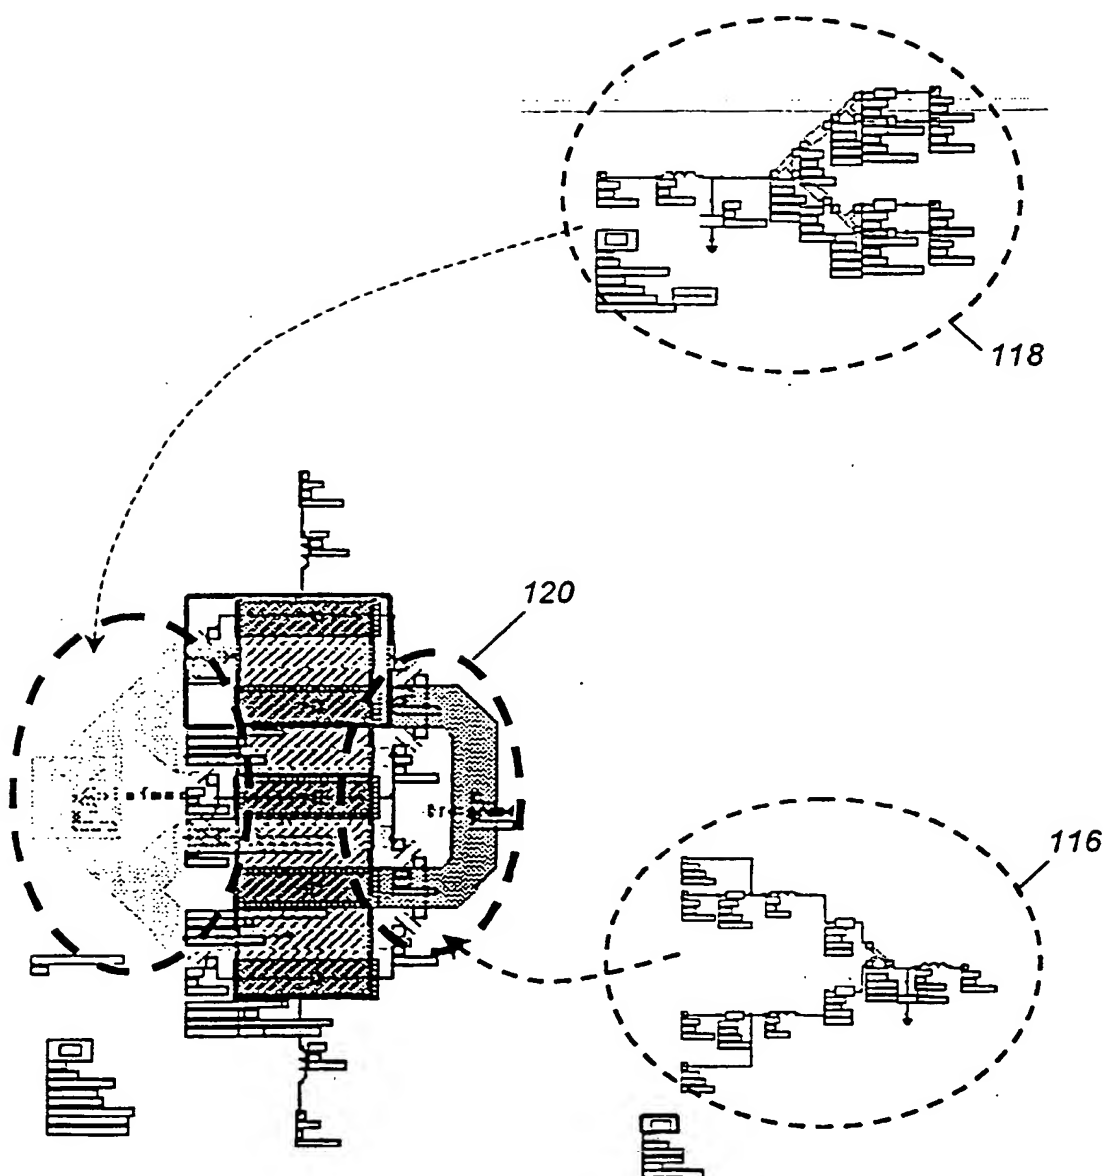

Implementation of the fifth level of embedding

Figure 58

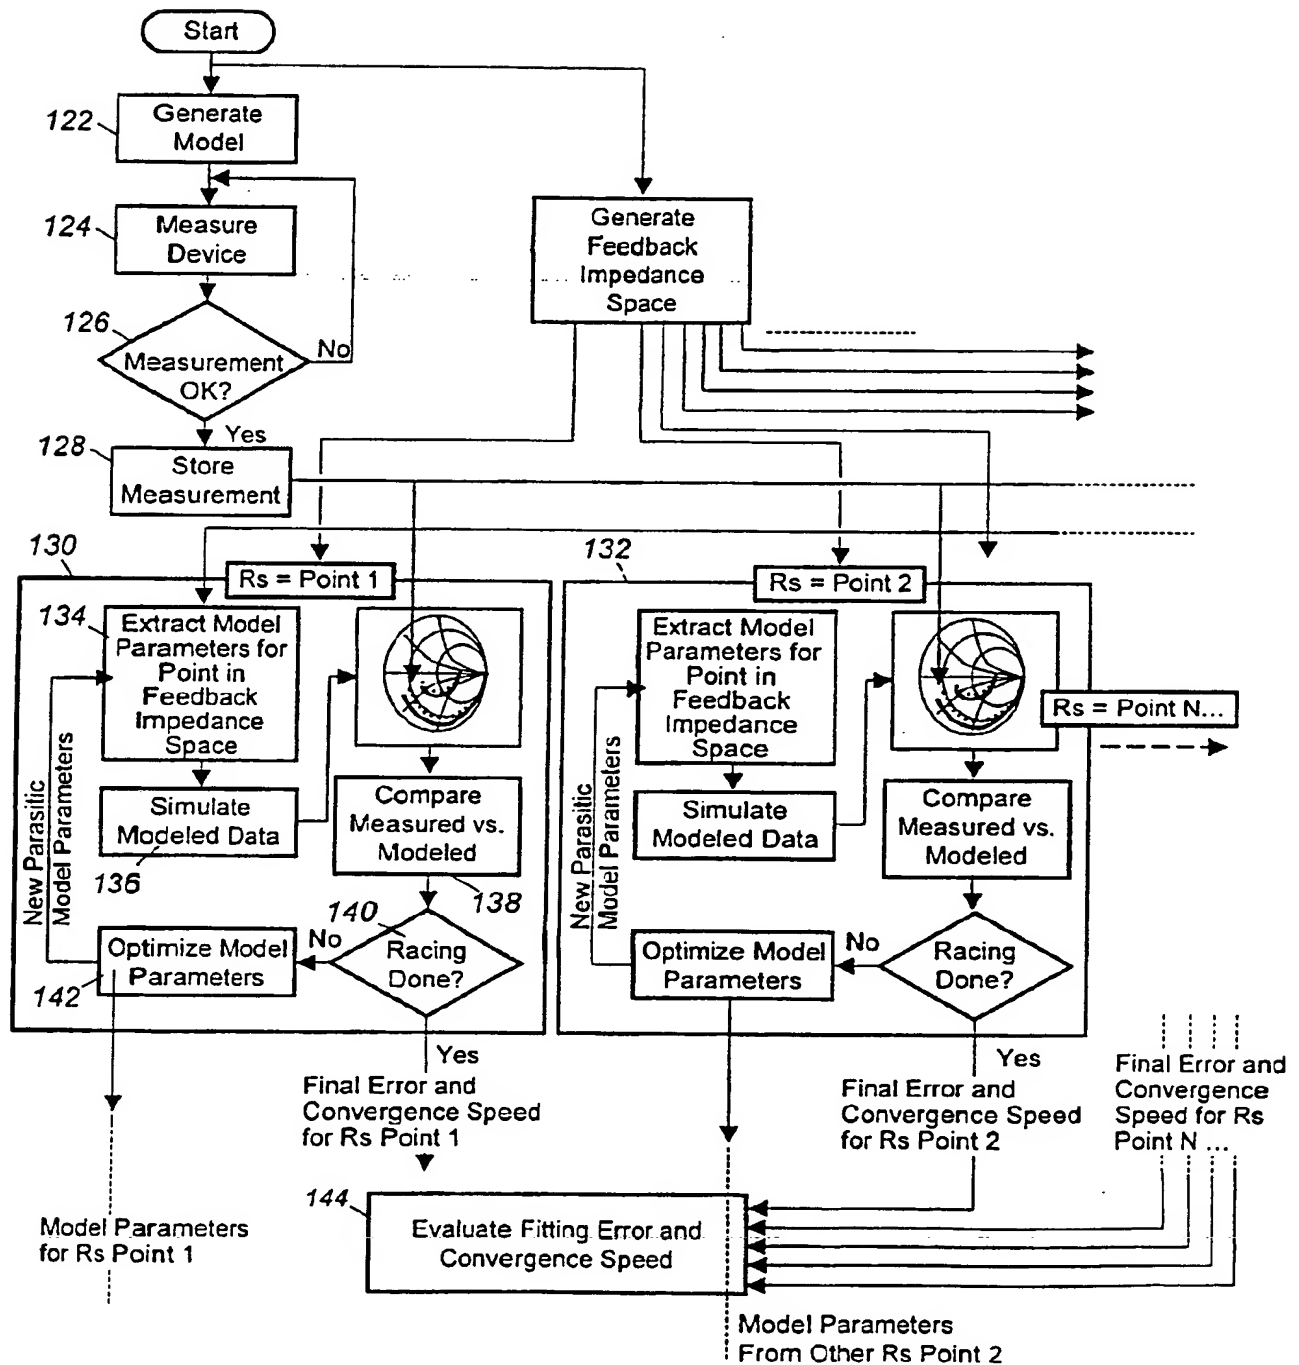


Figure 59A

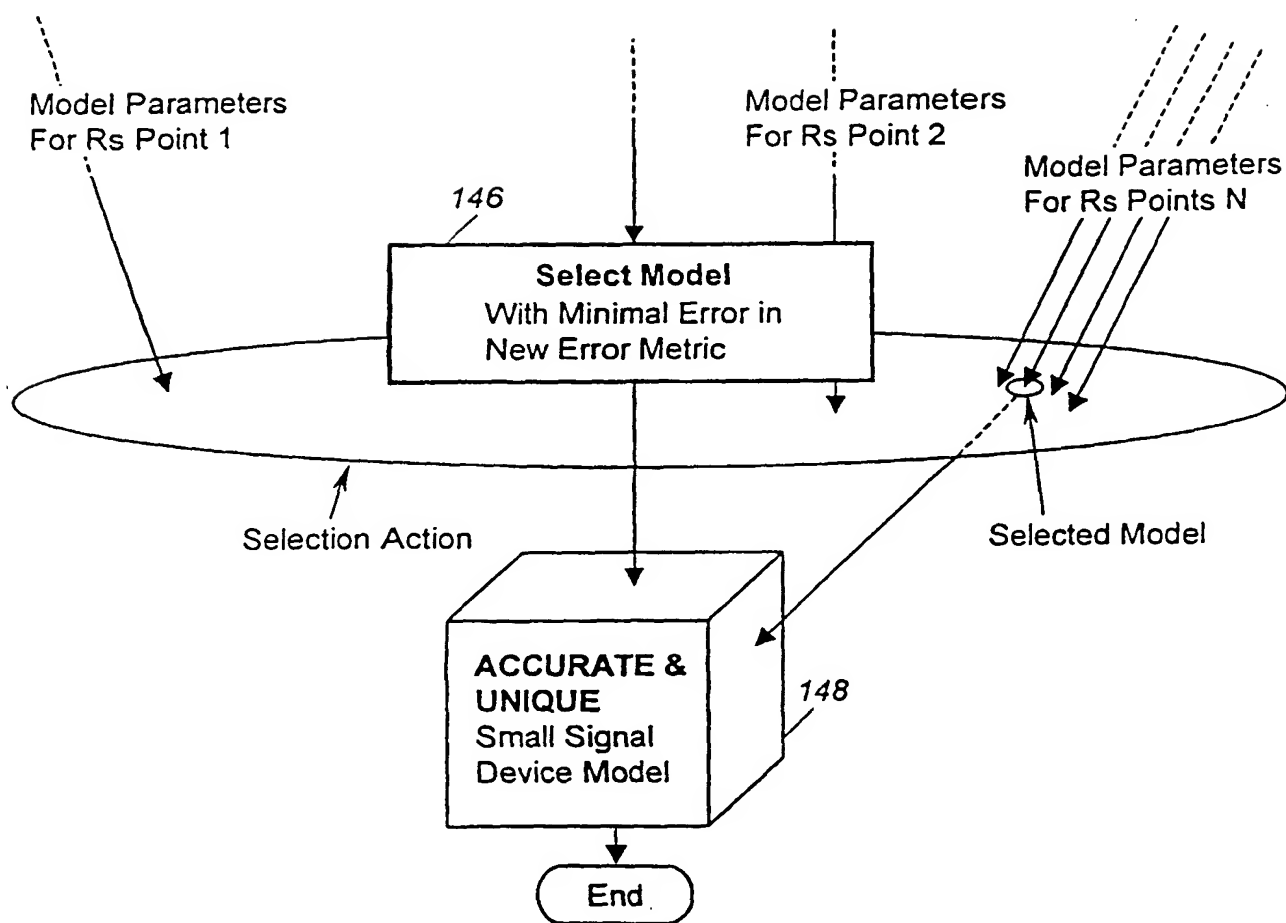


Figure 59B

Final Error vs RS Map for YYY-STATE 1coc__

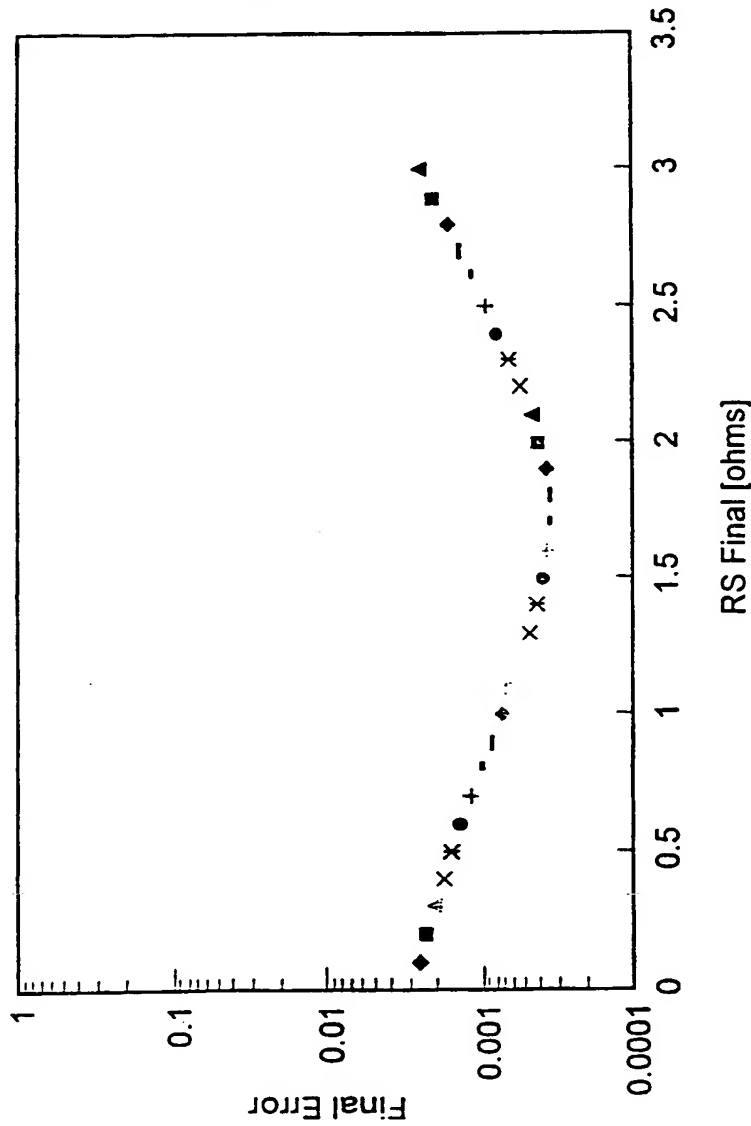


Figure 60

◆ RS=0.1,RD=0.000004,RG=3.631111
 ■ RS=0.2,RD=0.00006,RG=3.700725
 ▲ RS=0.3,RD=0.000006,RG=3.827767
 × RS=0.4,RD=0.000077,RG=3.917606
 × RS=0.5,RD=0.000002,RG=4.002959
 ● RS=0.6,RD=0.000063,RG=4.121072
 + RS=0.7,RD=0.000672,RG=4.225347
 - RS=0.8,RD=0.000007,RG=4.32573
 - RS=0.9,RD=0.000001,RG=4.427338
 ◆ RS=1,RD=0.000284,RG=4.536612
 □ RS=1.1,RD=0.000042,RG=4.627873
 × RS=1.2,RD=0.380034,RG=4.667158
 × RS=1.3,RD=0.861394,RG=4.69531
 × RS=1.4,RD=1.568092,RG=4.676249
 ● RS=1.5,RD=2.072742,RG=4.704008
 + RS=1.6,RD=2.741666,RG=4.685351
 - RS=1.7,RD=3.309899,RG=4.711895
 - RS=1.8,RD=3.901662,RG=4.722658
 ◆ RS=1.9,RD=4.528121,RG=4.730933
 ■ RS=2,RD=5.080991,RG=4.75499
 ▲ RS=2.1,RD=5.649669,RG=4.781182
 × RS=2.2,RD=6.197713,RG=4.81535
 × RS=2.3,RD=6.720198,RG=4.855583
 ● RS=2.4,RD=7.205221,RG=4.909625
 + RS=2.5,RD=7.705211,RG=4.960891
 - RS=2.6,RD=8.202621,RG=5.01476
 - RS=2.7,RD=8.778481,RG=5.030824
 ◆ RS=2.8,RD=9.386087,RG=5.027081
 ■ RS=2.9,RD=9.911043,RG=5.074825
 ▲ RS=3,RD=10.48296,RG=5.083981
 × RS=0.911268,RD=3.009443,RG=4.152256
 × RS=1.439659,RD=3.33544,RG=3.769519
 × RS=1.606168,RD=3.520349,RG=3.502953


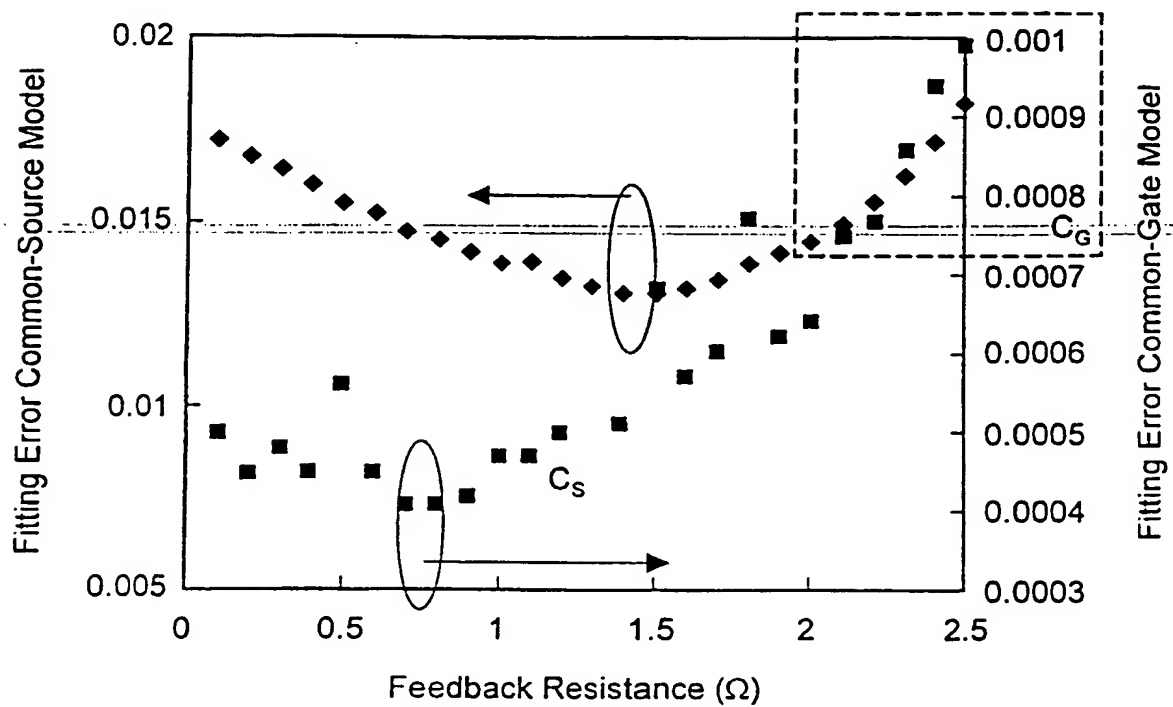


Figure 61

□ measure SMAT1 S[1,1]	○ measure SMAT1 S[1,2]	▽ measure SMAT1 S[2,2]	△ Simulated SMAT1 S[1,1]	◇ Simulated SMAT1 S[1,2]	× Simulated SMAT1 S[2,2]
------------------------------	------------------------------	------------------------------	--------------------------------	--------------------------------	--------------------------------

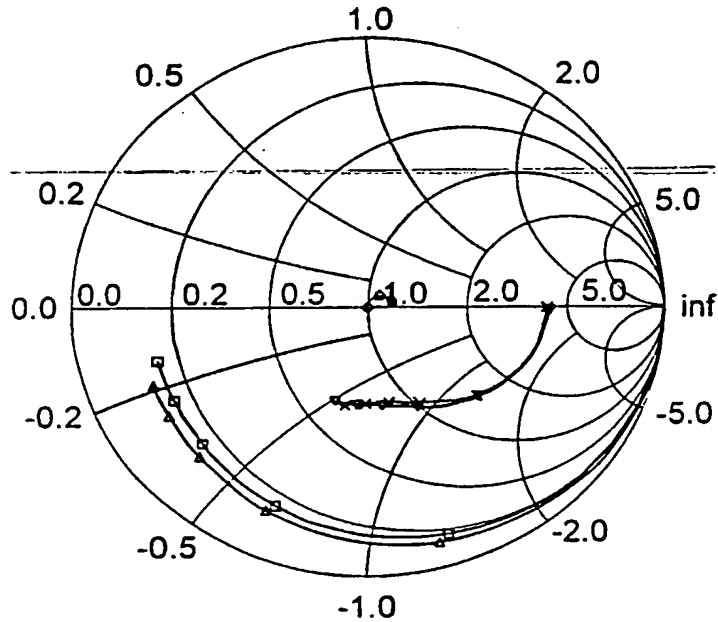

Frequency 0.05 to 40.05 GHz

Figure 62A

□ measure SMAT1 S[2,1] dB	○ Simulated SMAT1 S[2,1] db	▽ measure SMAT1 S[2,1] Ang deg	△ Simulated SMAT1 S[2,1] Ang deg
------------------------------------	--------------------------------------	--	--


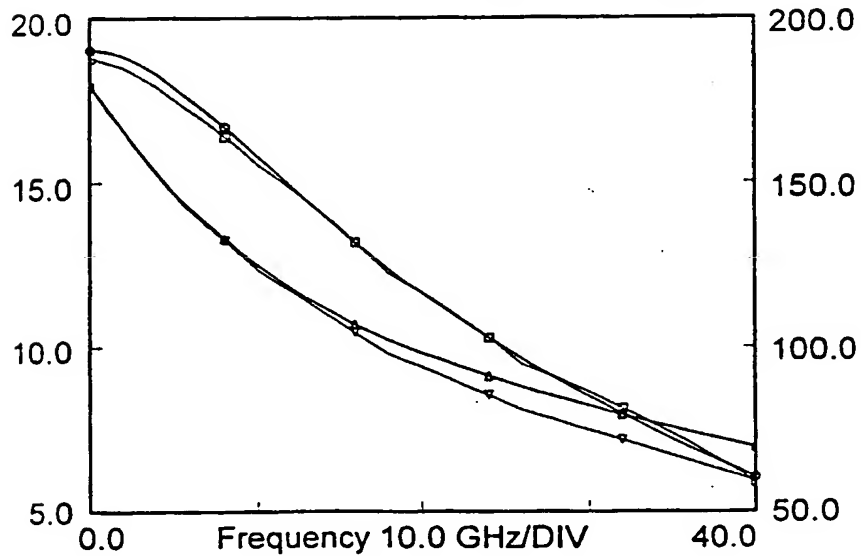


Figure 62B

□ measure SMAT1 S[1,1] ○ measure SMAT1 S[1,2] ▽ measure SMAT1 S[2,2] △ Simulated SMAT1 S[1,1] ◇ Simulated SMAT1 S[1,2] × Simulated SMAT1 S[2,2]

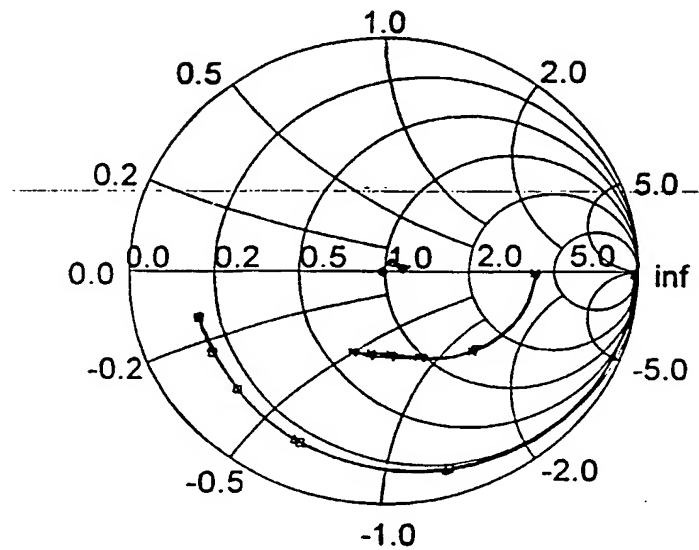

Frequency 0.05 to 40.05 GHz

Figure 63A

□ measure SMAT1 S[2,1] dB ○ Simulated SMAT1 S[2,1] dB ▽ measure SMAT1 Ang deg △ Simulated SMAT1 Ang deg

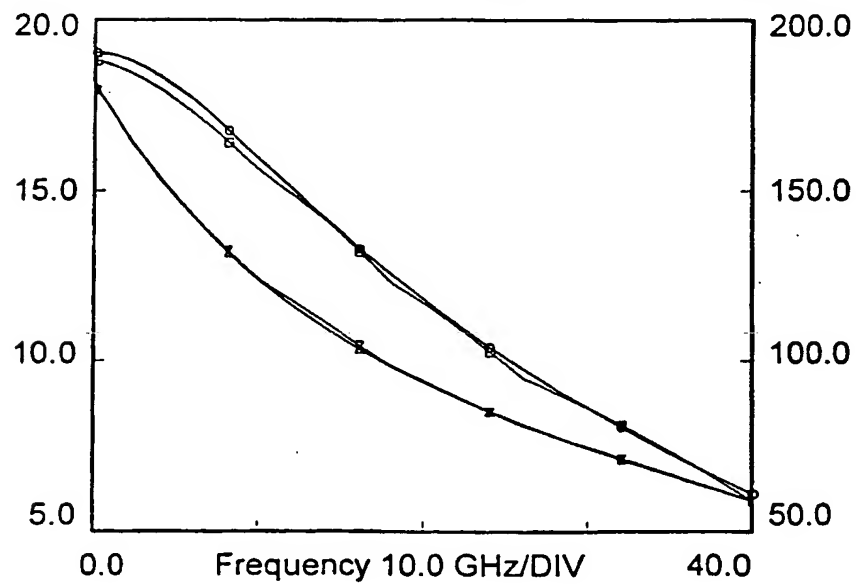


Figure 63B

□ measure SMAT1 S[1,1] ○ measure SMAT1 S[1,2] ▽ measure SMAT1 S[2,2] △ Simulated SMAT1 S[1,1] ◇ Simulated SMAT1 S[1,2] × Simulated SMAT1 S[2,2]

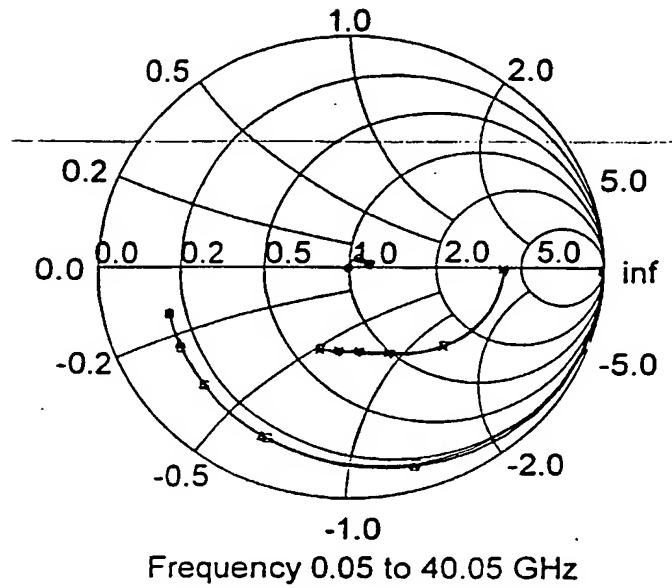


Figure 64A

□ measure SMAT1 S[2,1] dB ○ Simulated SMAT1 S[2,1] db ▽ measure SMAT1 S[2,1] Ang deg △ Simulated SMAT1 S[2,1] Ang deg

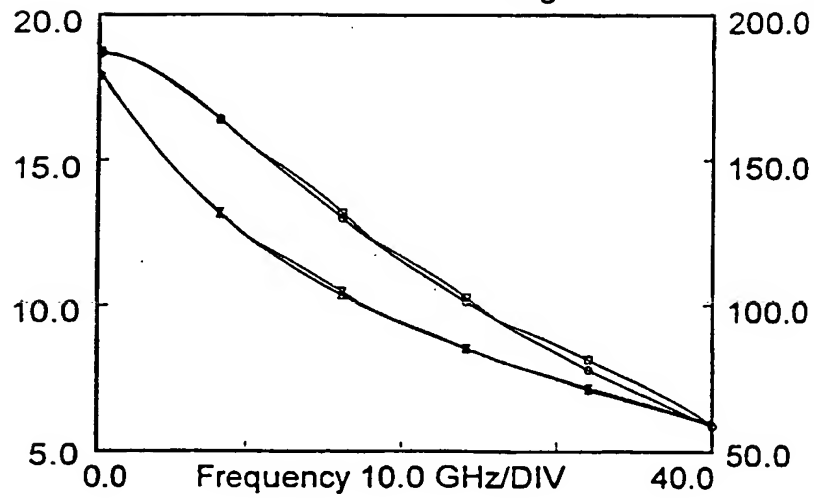


Figure 64B

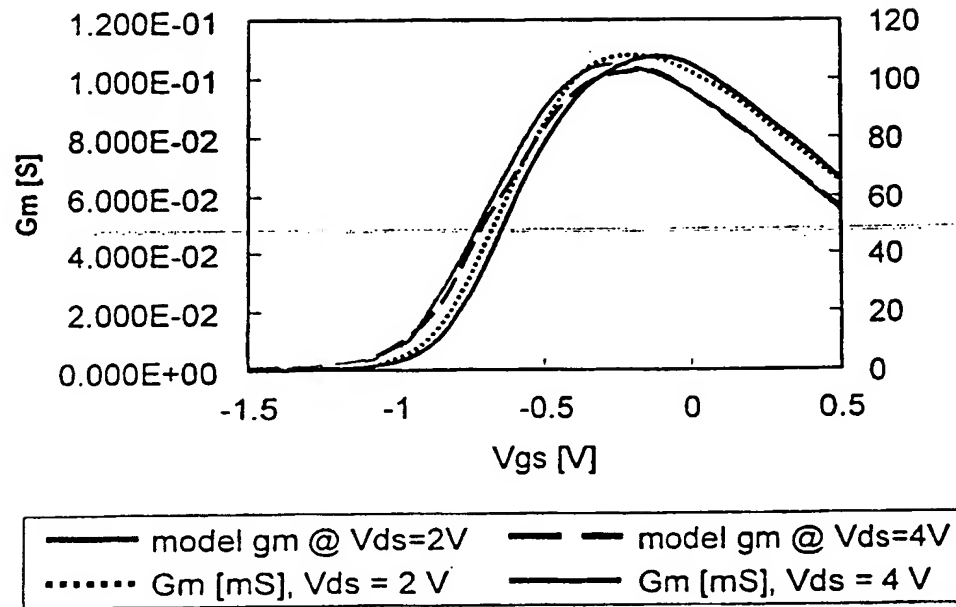


Figure 65

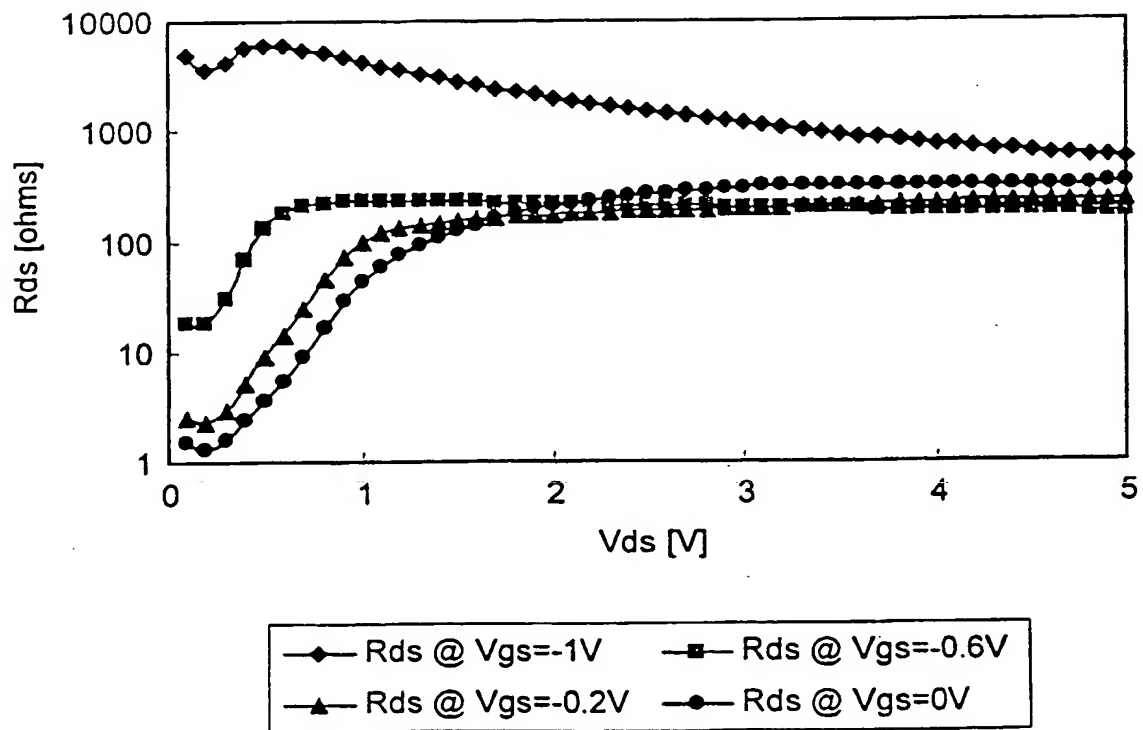


Figure 66


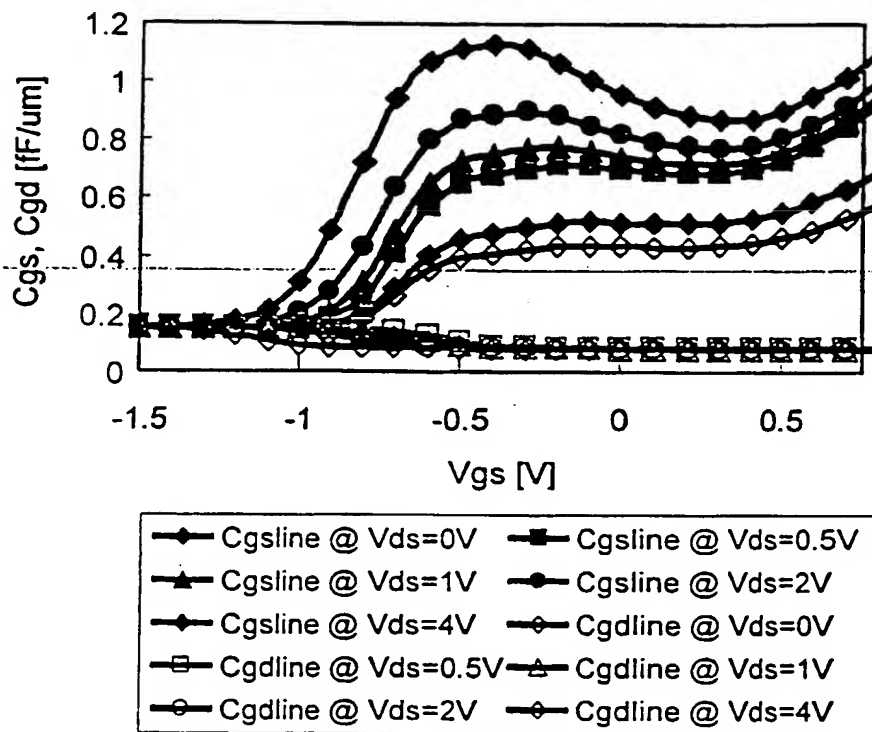


Figure 67

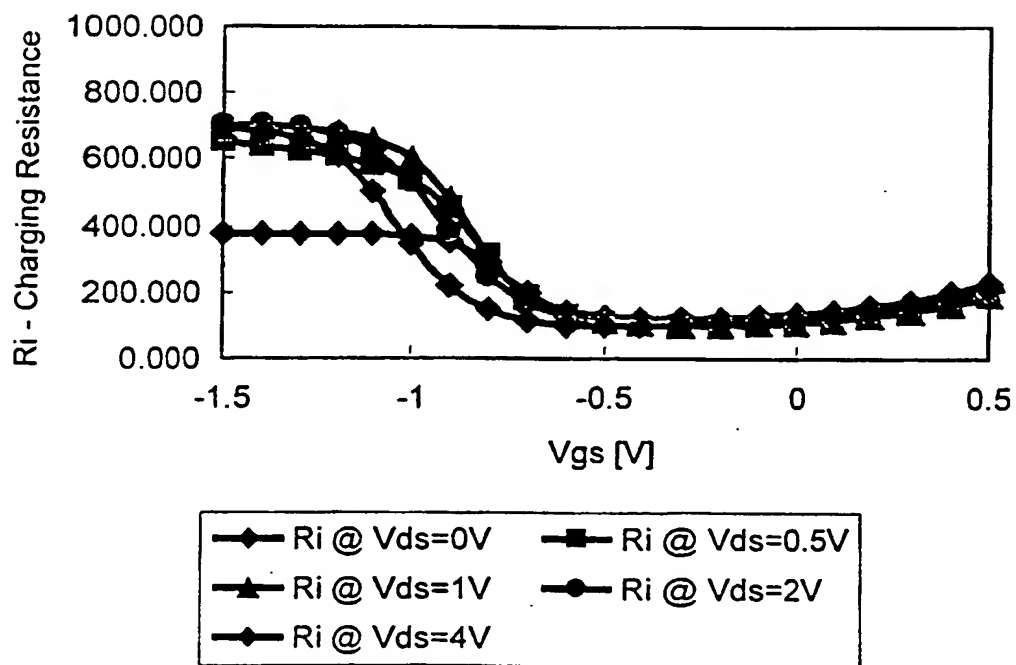

Figur 68

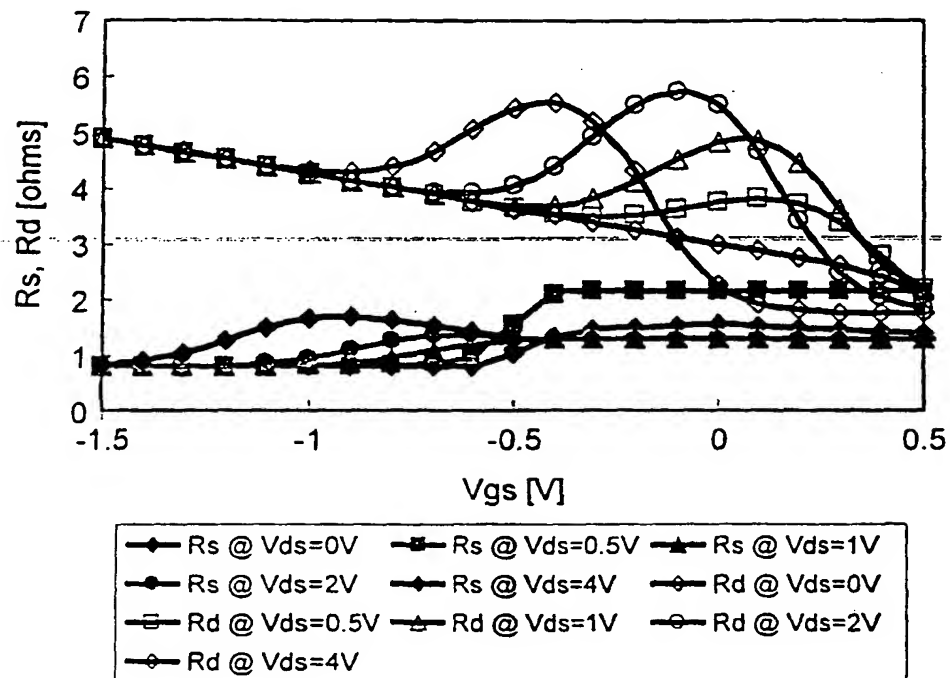


Figure 69

Measured vs Simulated Bias- Dependent Gain @ 23.5 GHz

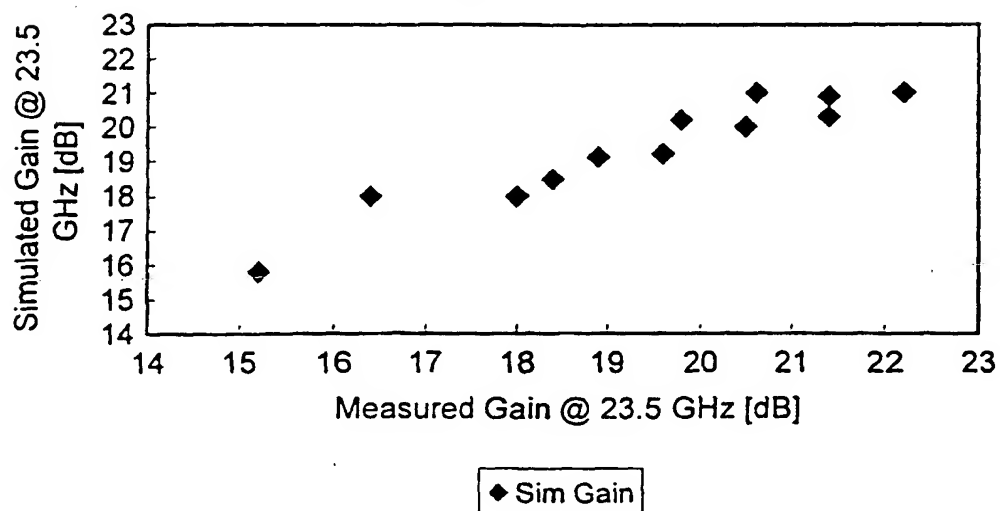


Figure 70

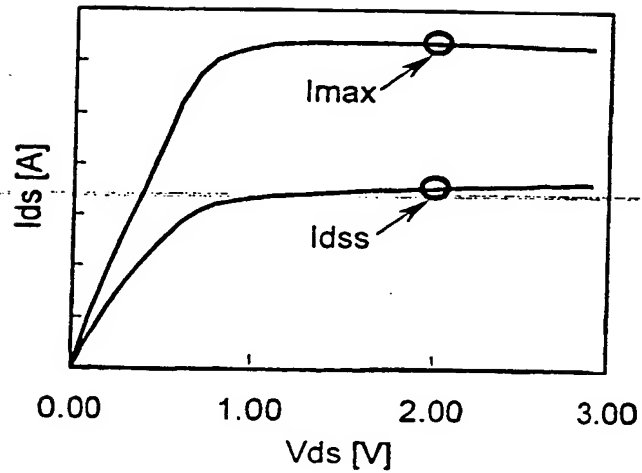


Figure 71A

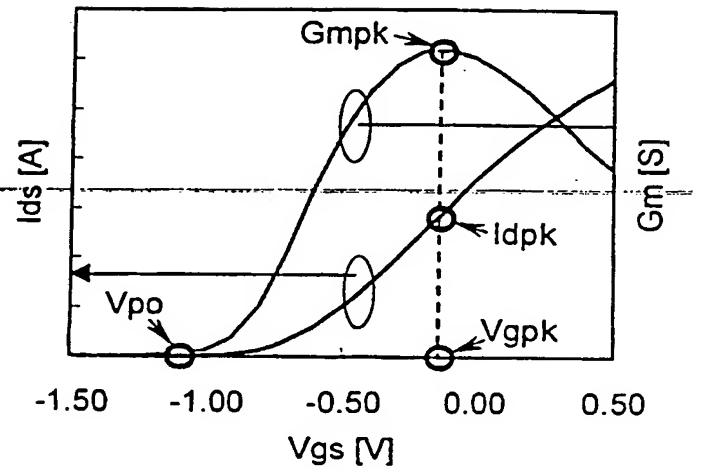


Figure 71B

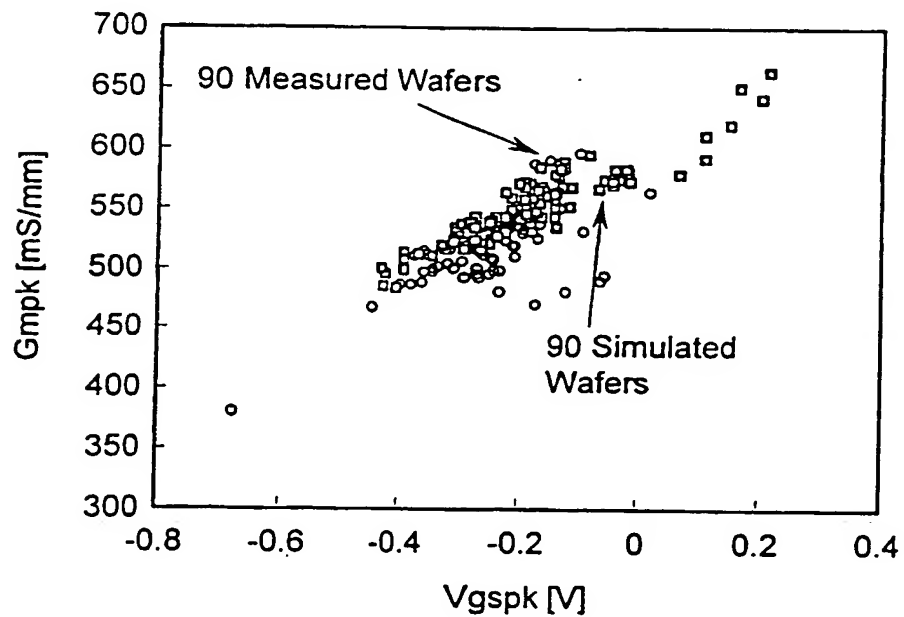


Figure 72

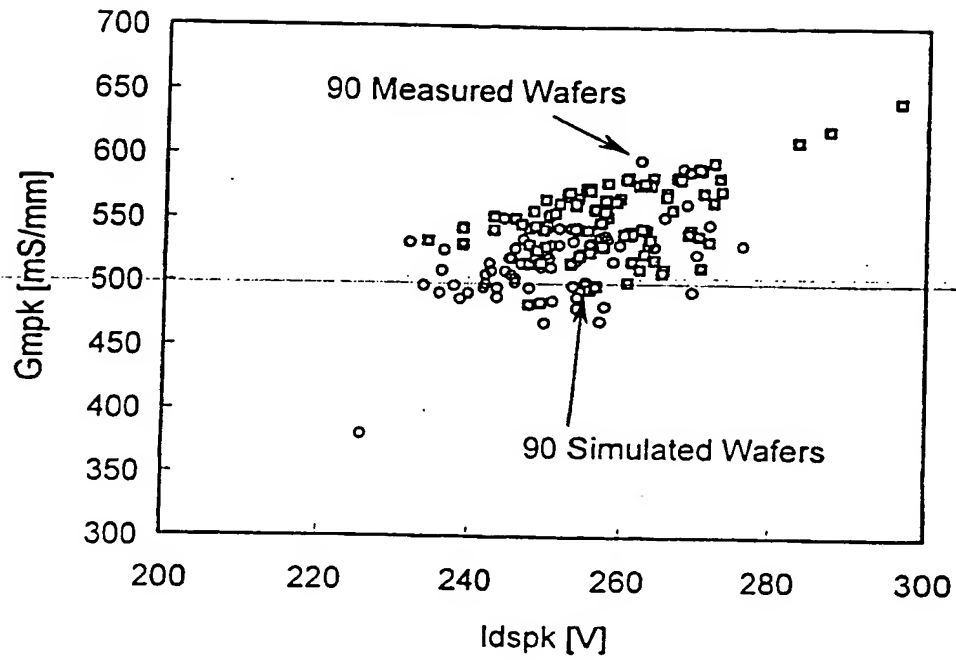


Figure 73

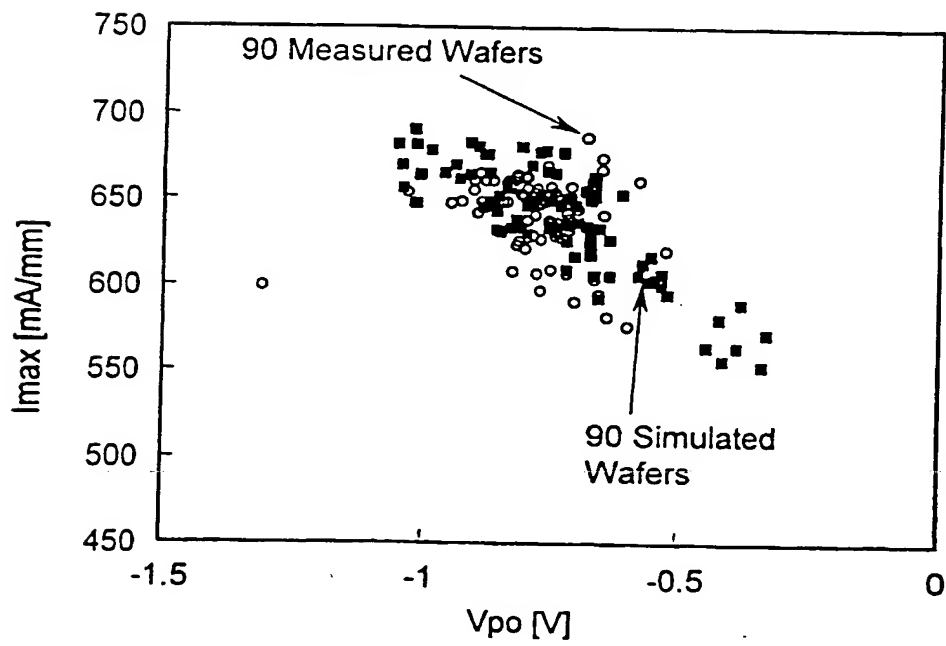


Figure 74

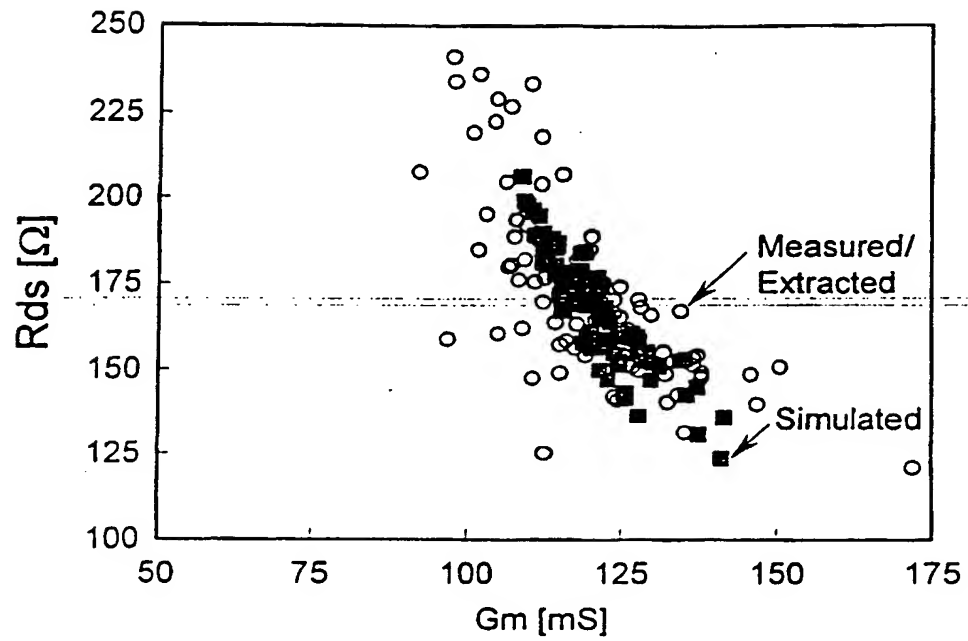


Figure 75

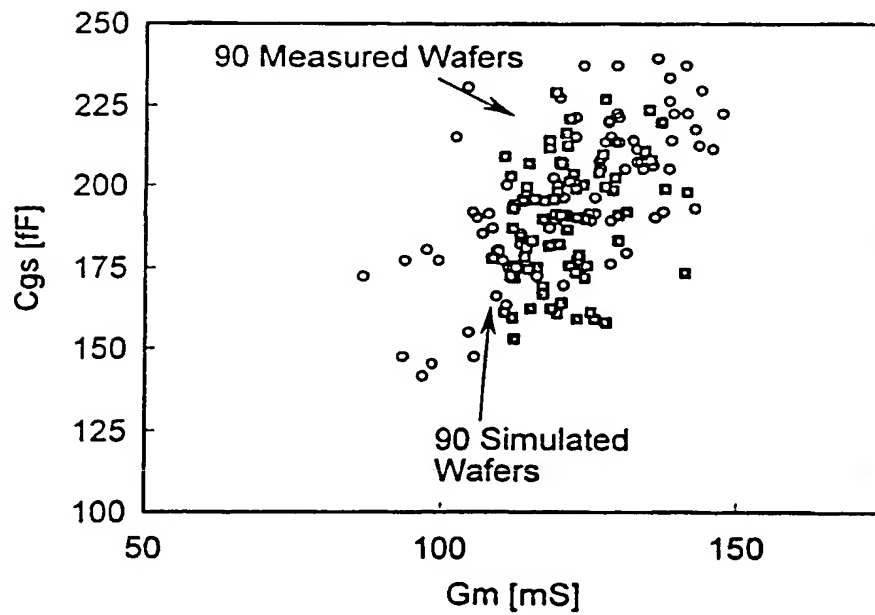


Figure 76

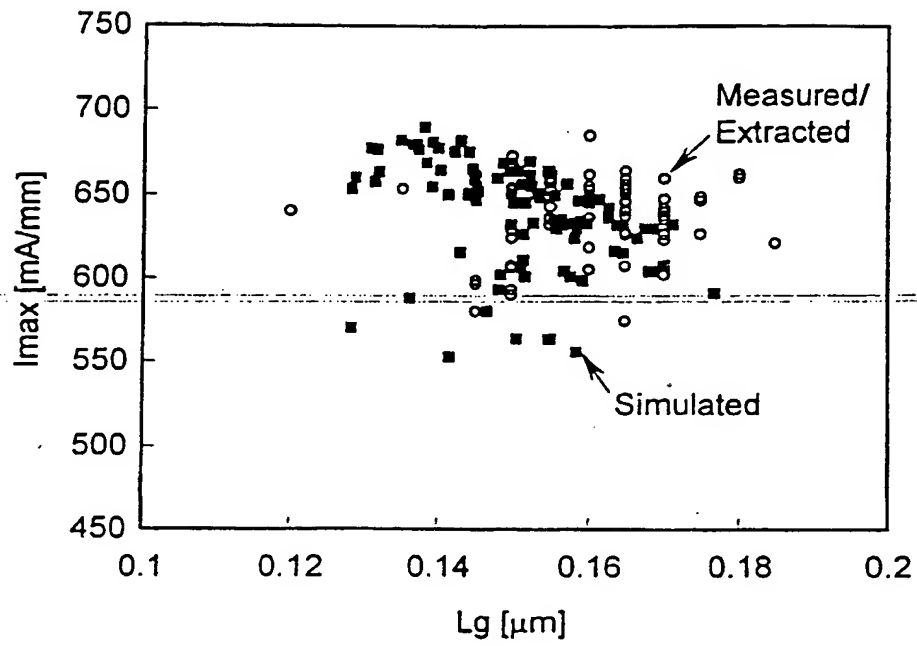


Figure 77

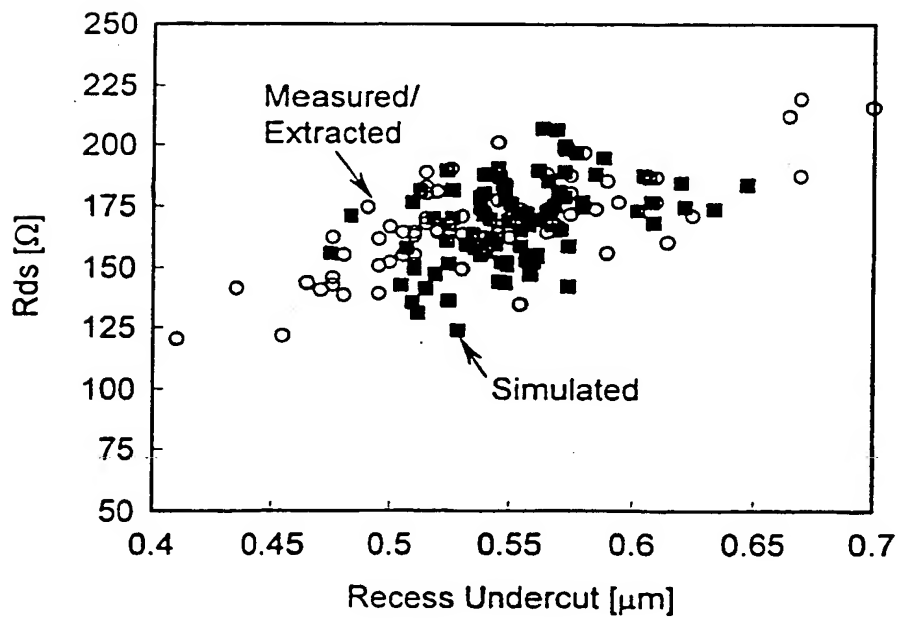


Figure 78

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/13361

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06G 7/48

US CL : 703/4

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 703/4; 703/2

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST, IEEE, Science Server

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LU et al. A Simplified Large-Signal HBT Model for RF Circuit Design. IEEE MTT-S Digest. JUNE 1998. pages 1607-1610, especially figure 1.	1-16
X	US 5,467,291 A (FAN et al.) 14 November 1995, figures 1-6 and corresponding text.	1-16
X	US 5,051,373 A (YAMADA et al.) 24 September 1991, figure 15 and corresponding text.	1-16

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 11 AUGUST 2001	Date of mailing of the international search report 05 SEP 2001
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer HUGH JONES Telephone No. (703) 305-9704